

(12) **Patent Application Publication**
Cornew et al.

(43) **Pub. Date:** **Jul. 7, 2016**

(52) U.S. Cl.

2211/00 (2013.01)

(22) Filed: **Jun. 20, 2014**

Related U.S. Application Data


(60) Provisional application No. 61/844,786, filed on Jul. 10, 2013.

Publication Classification

(51) **Int. Cl.**
B64C 3/32 (2006.01)
H01L 31/0475 (2006.01)

ABSTRACT

A method of making a solar cell assembly includes placing backsides of multiple solar cells in contact with a substrate. The solar cells are electrically connected to each other. Heat and pressure are applied to the solar cells and the substrate to simultaneously impress the solar cells into the substrate and bond the solar cells to the substrate.

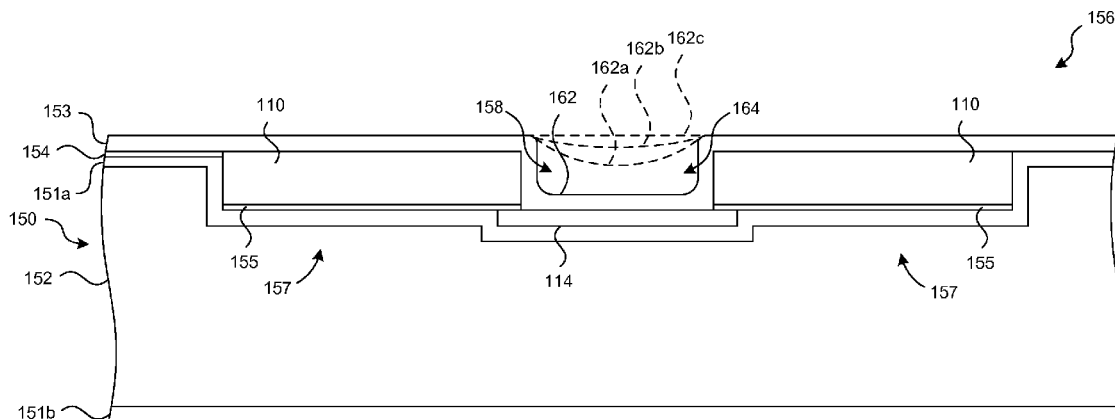

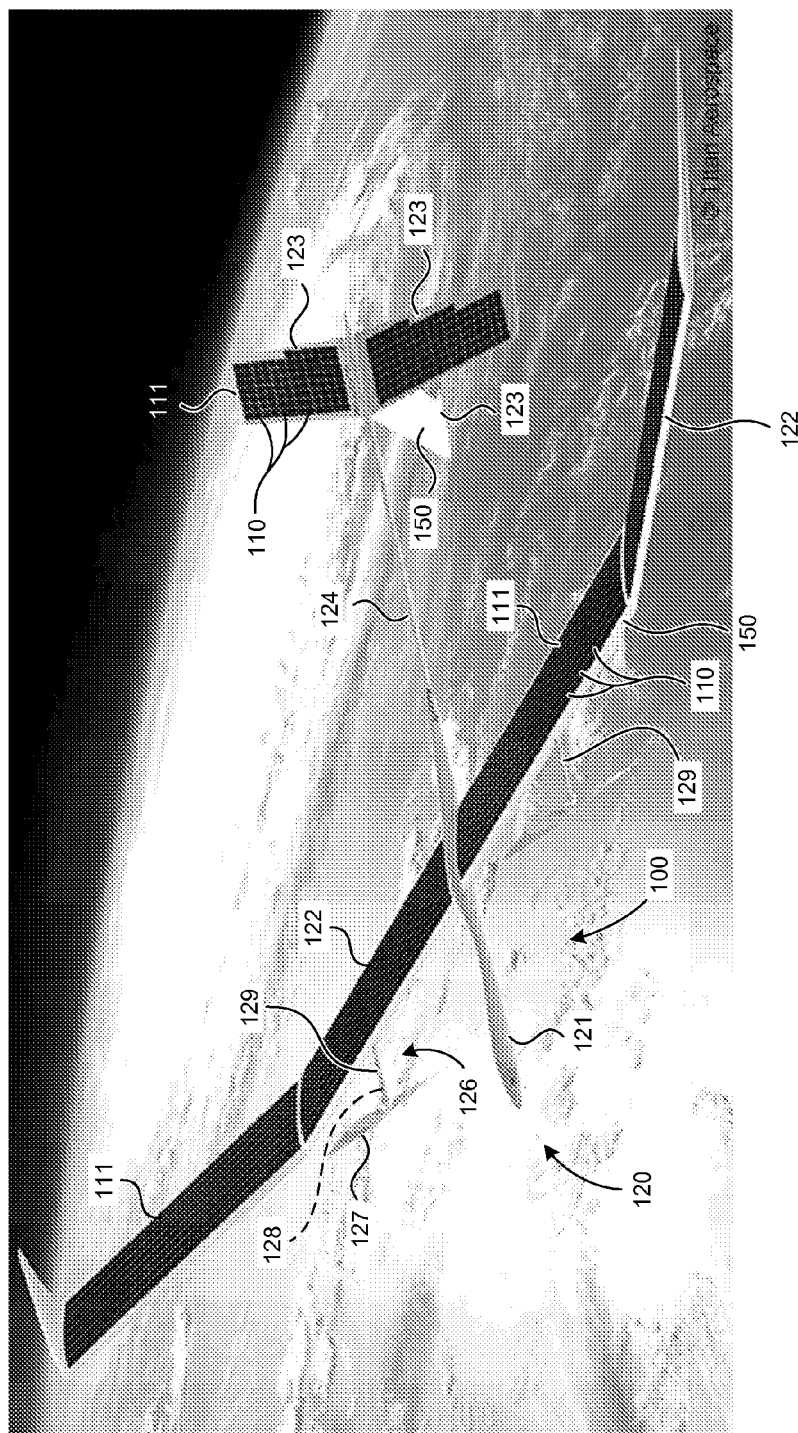


FIG. 1A

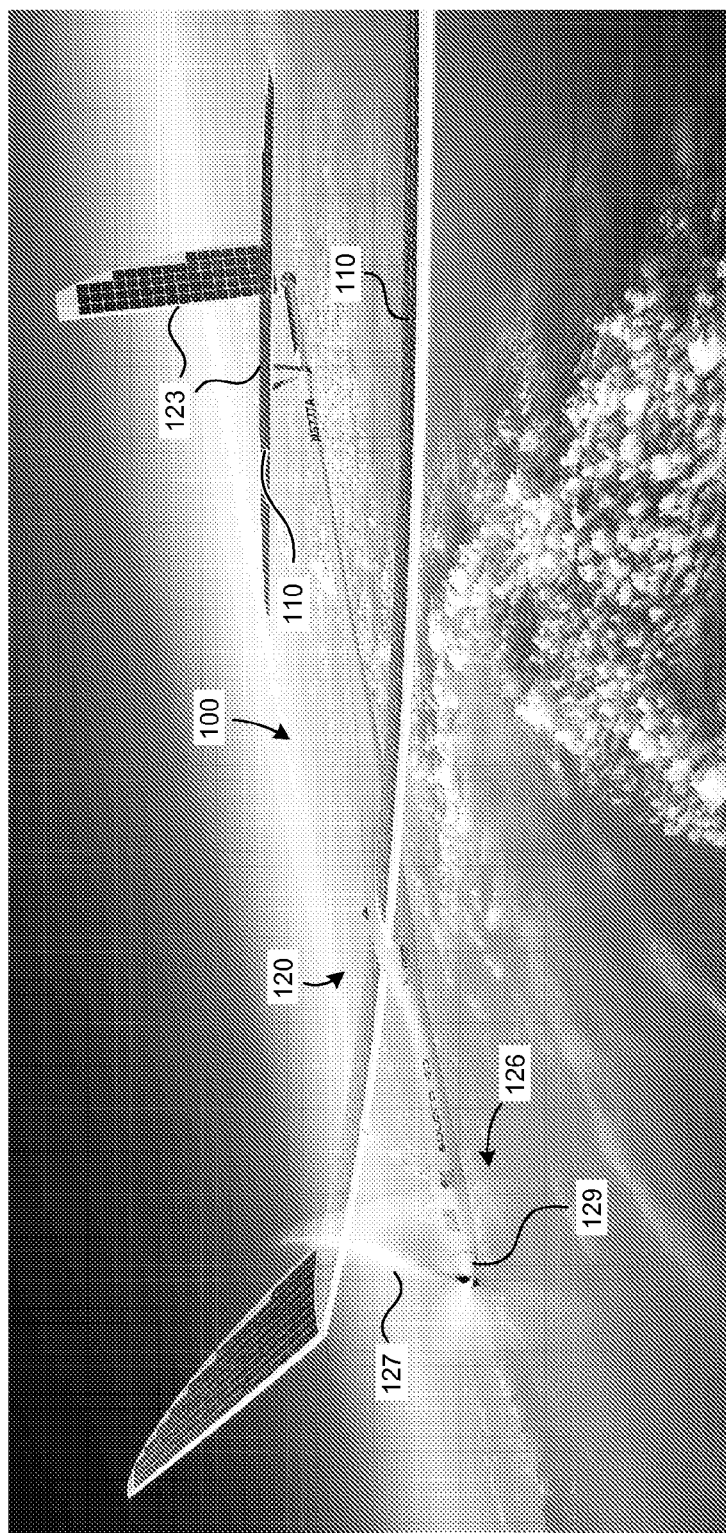


FIG. 1B

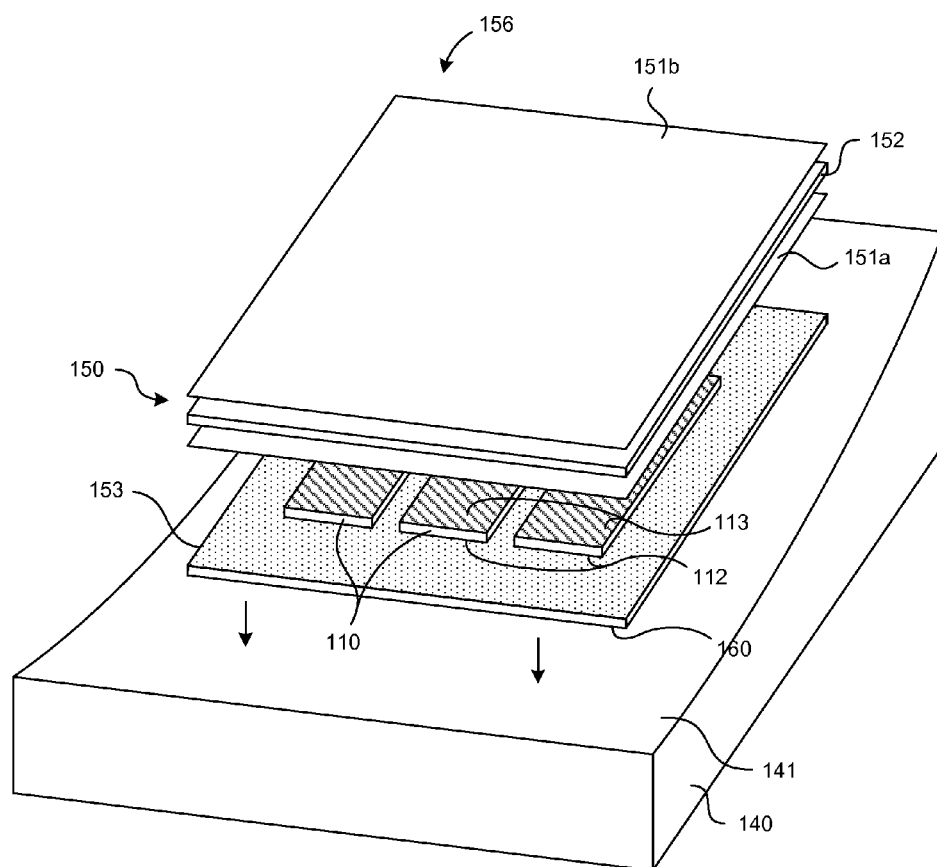


FIG. 2

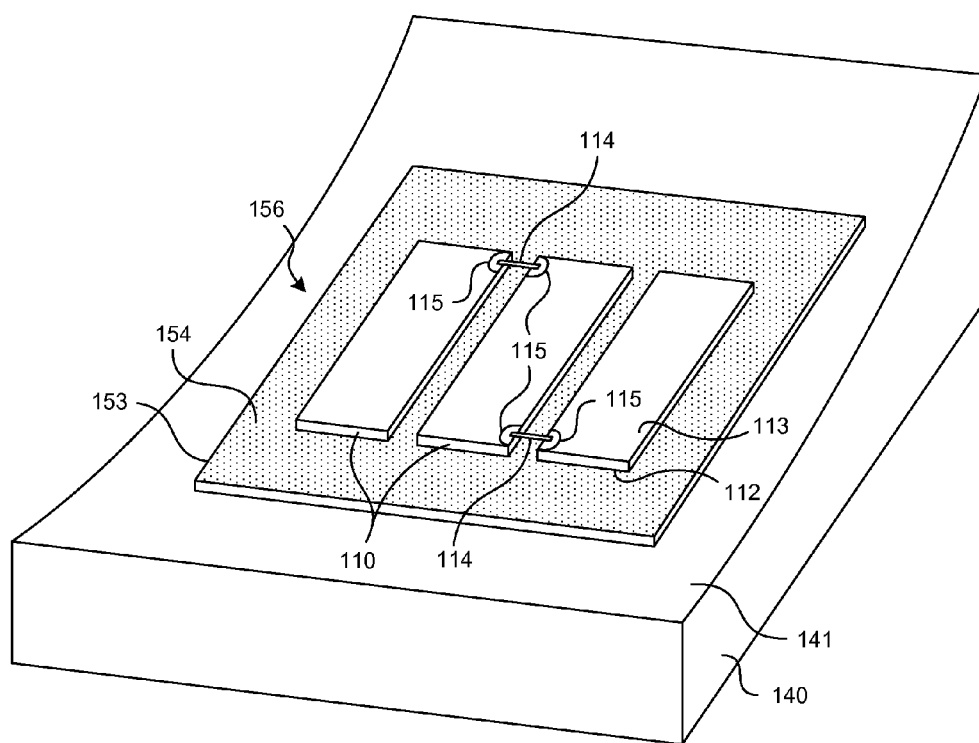


FIG. 3A

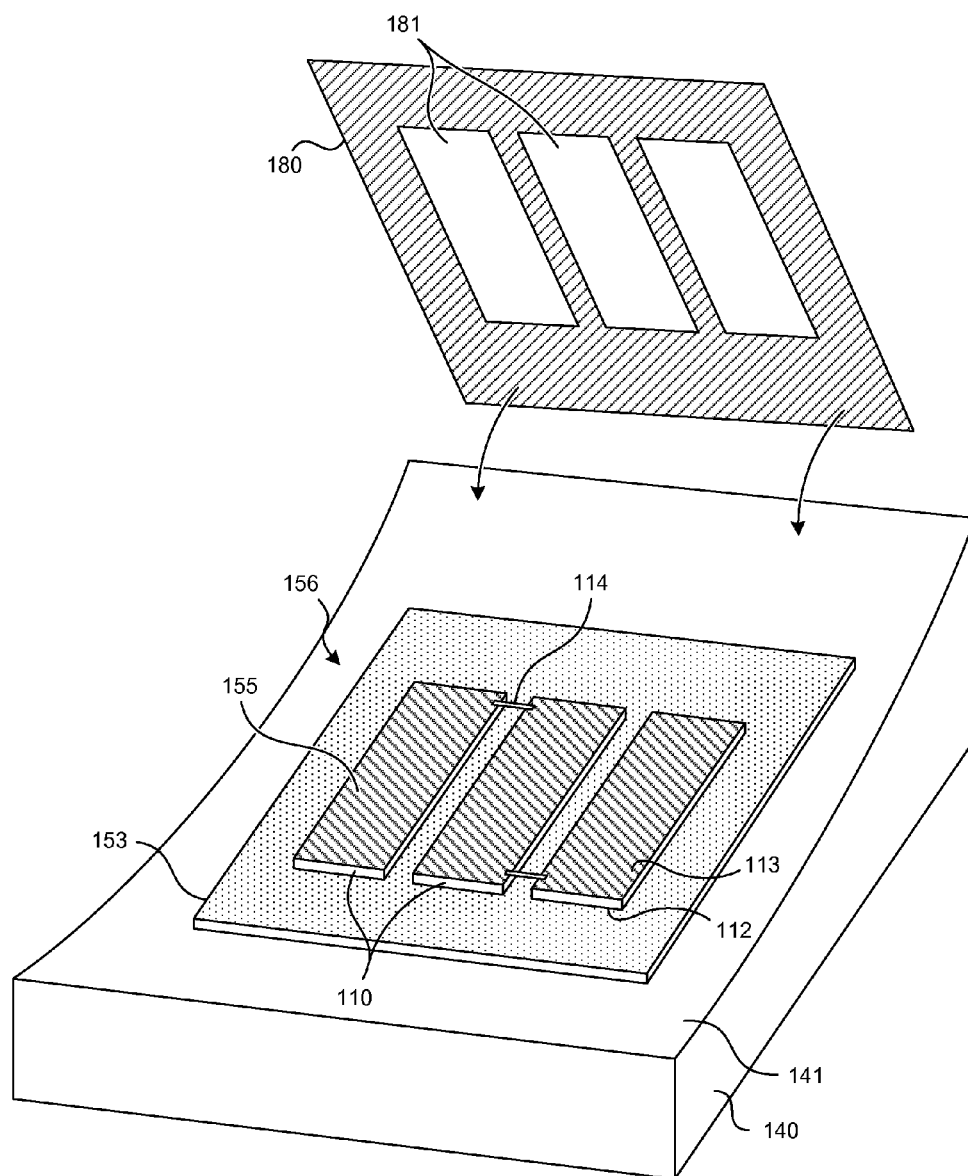


FIG. 3B

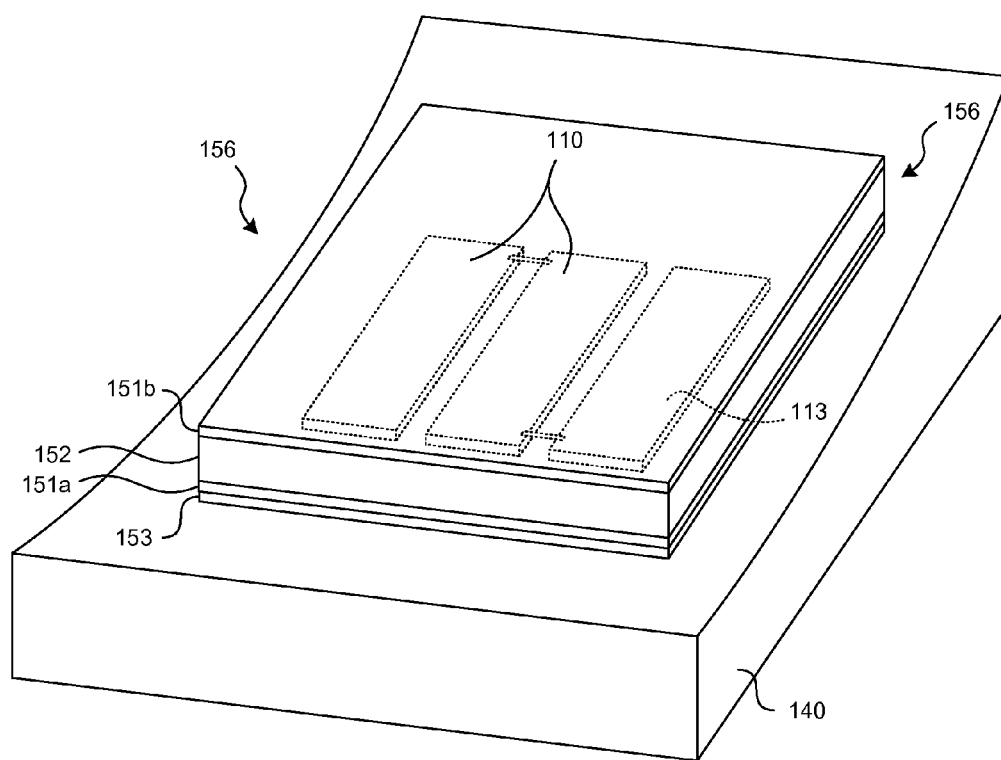


FIG. 3C

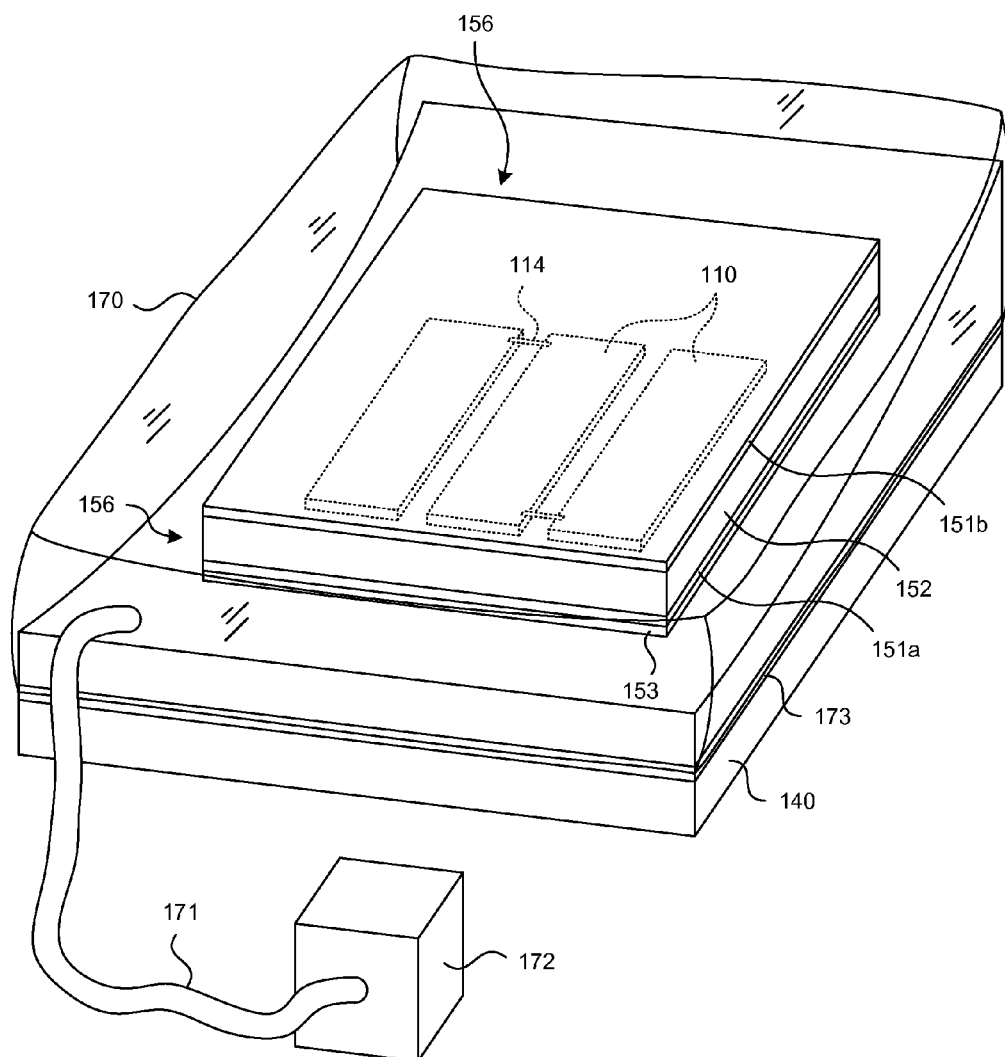


FIG. 3D

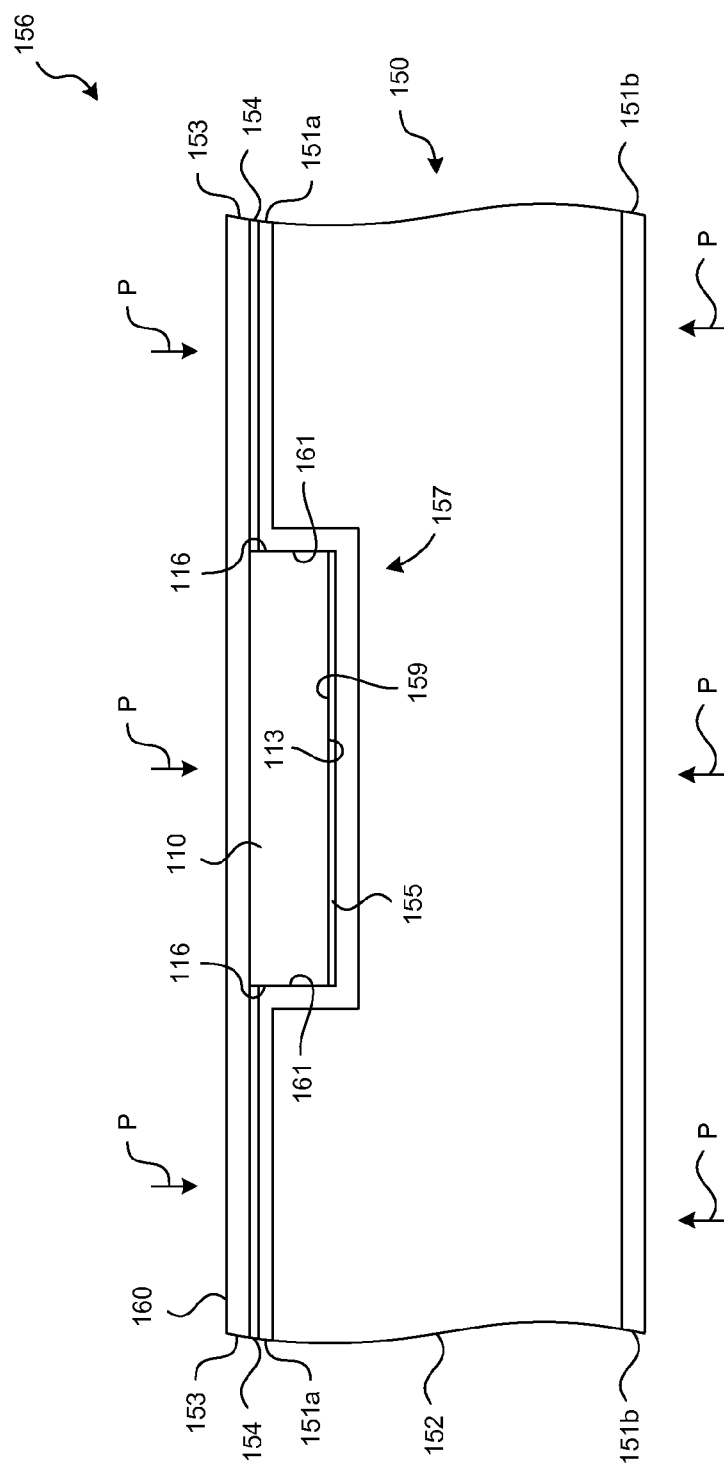


FIG. 4A

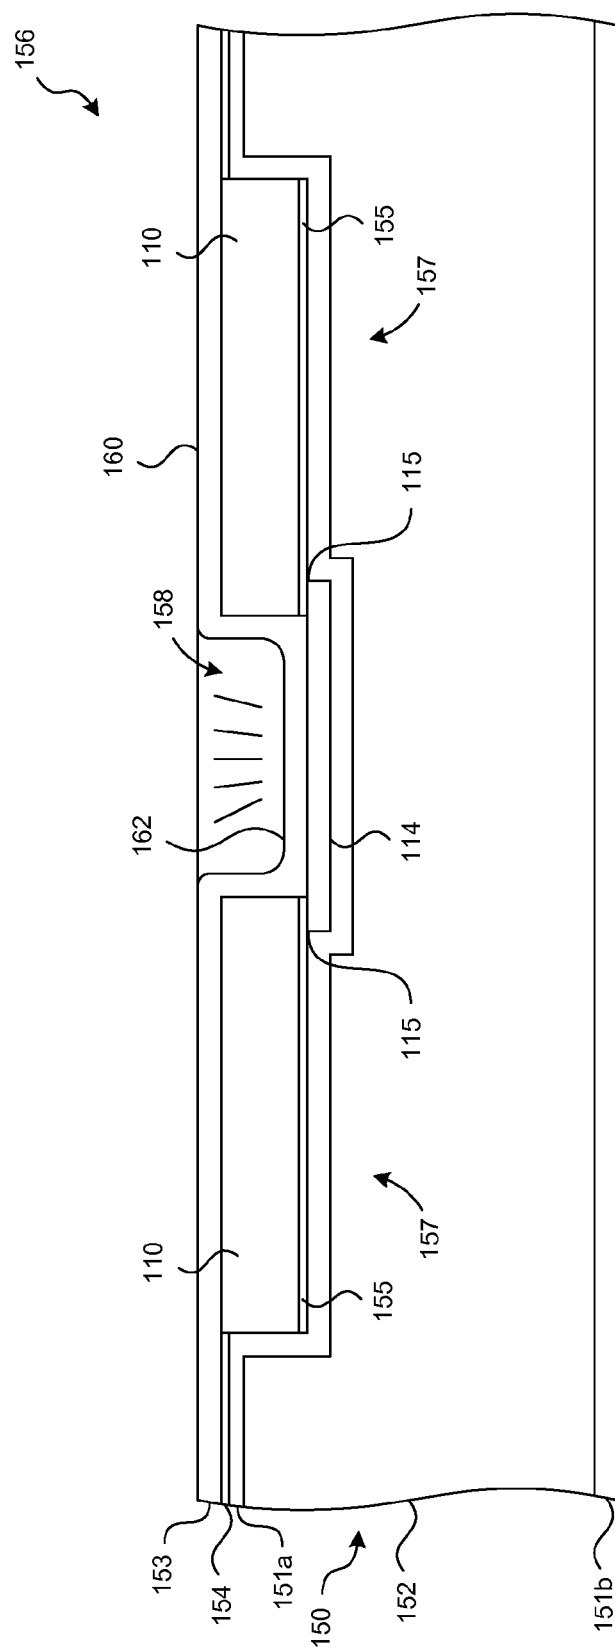


FIG. 4B

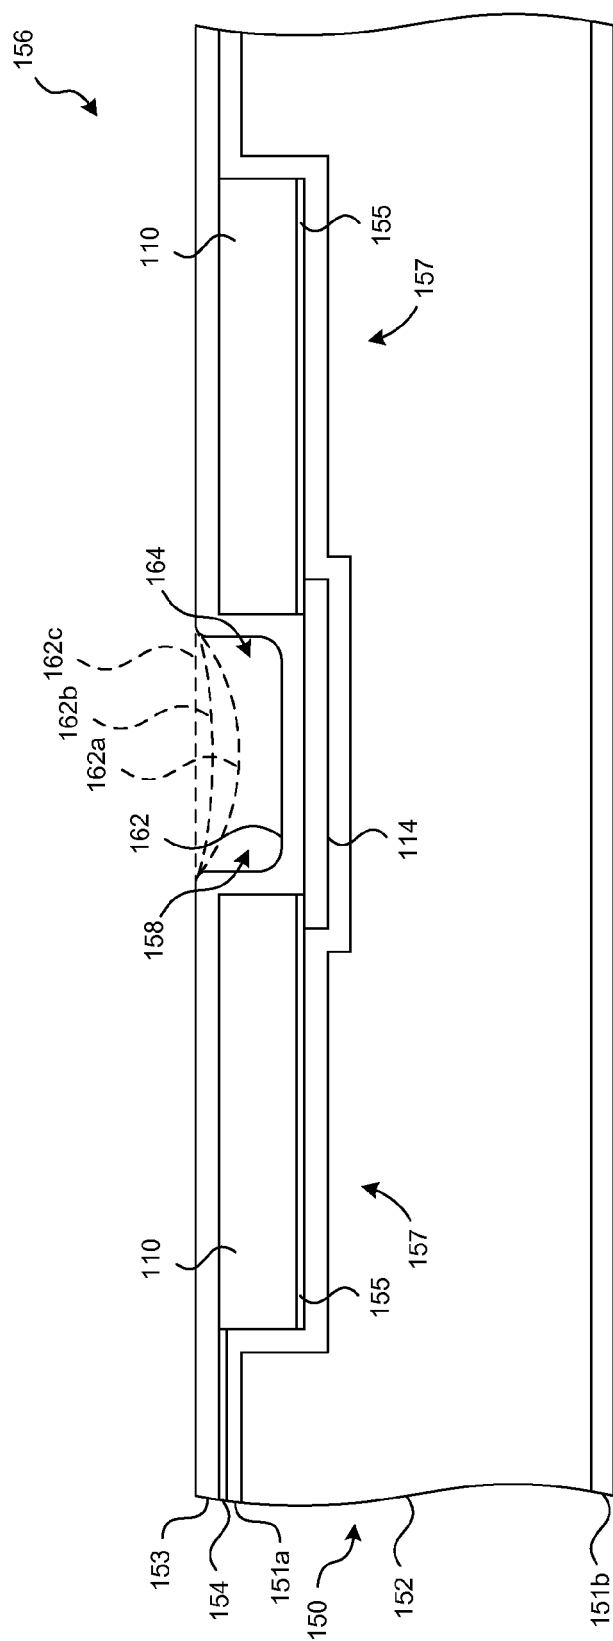


FIG. 4C

HIGH ALTITUDE AIRCRAFT WITH INTEGRATED SOLAR CELLS, AND ASSOCIATED SYSTEMS AND METHODS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority under the provisions of 35 U.S.C. §119(e) to U.S. Provisional Application No. 61/844,786, filed Jul. 10, 2013.

TECHNICAL FIELD

[0002] The present technology is directed generally to high altitude aircraft with integrated solar cells, and associated systems and methods.

BACKGROUND INFORMATION

[0003] Unmanned air vehicles (UAVs) have proliferated recently because they can perform a variety of valuable tasks without incurring the costs and risks associated with a piloted aircraft. Typical UAV tasks include surveillance and communication tasks. However, one drawback with many existing UAVs is that they have limited endurance and can accordingly remain on-station for only a limited period of time. As a result, it can be difficult to provide the foregoing tasks consistently for an extended period of time.

[0004] One approach to addressing the foregoing endurance issues is to provide solar power to a UAV, potentially enabling the UAV to remain on-station for extended periods of time because it generates the power it requires while in flight. However, such systems tend to be heavy and/or expensive, both of which factors make it difficult to provide surveillance, communications, and/or other services at a competitive price. Accordingly, there remain unmet needs for providing long endurance, unmanned air vehicle services at competitive rates.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] FIGS. 1A and 1B are partially schematic, isometric illustration of unmanned air vehicle systems having solar cells integrated in accordance with an embodiment of the present technology.

[0006] FIG. 2 is a partially exploded illustration of an aircraft substrate having solar cells integrated in accordance with an embodiment of the present technology.

[0007] FIGS. 3A-3D illustrate a representative process for integrating solar cells with an aircraft substrate in accordance with the present technology.

[0008] FIGS. 4A-4C illustrate cross-sectional views of substrates having integrated solar cells in accordance with embodiments of the present technology.

DETAILED DESCRIPTION

[0009] The present technology is directed generally to high altitude aircraft with integrated solar cells, and associated systems and methods. Specific details of several embodiments of the disclosed technology are described below with reference to particular aircraft configurations and solar cell configurations, but in other embodiments, representative systems can include aircraft and/or solar cells having different configurations than those described below. Several details describing structures and/or processes that are well-known and often associated with high altitude unmanned aircraft

and/or solar cell arrangements, but that may unnecessarily obscure some significant aspects of the present technology, are not set forth in the following description for purposes of clarity. Moreover, although the following disclosure sets forth several embodiments of different aspects of the presently disclosed technology, several other embodiments of the technology can have configurations and/or components different than those described in this section. Accordingly, the presently-disclosed technology may have other embodiments with additional elements, and/or without several of the elements described below with reference to FIGS. 1A-4C.

[0010] FIG. 1A is a partially schematic side elevation view of an aerospace system 100 that includes an aircraft 120 configured in accordance with an embodiment of the present technology. The aircraft 120 can be particularly configured to fly at very high altitudes (e.g., just within the earth's atmosphere) under power produced by multiple solar cells 110. In a particular embodiment, the aircraft 120 includes a narrow, elongated fuselage 121 coupled to one or more wings 122 or other lifting surfaces. The wings 122 can have a high aspect ratio with a significant dihedral or polyhedral e.g., suitable for low-speed, high altitude, long endurance flight. The aircraft 120 can further include a stabilizer boom or empennage 124 carrying one or more stabilizers 123 that provide stability and control functions. The aircraft 120 can still further include a propulsion system 126, which can in turn include one or more nacelles 129, each of which houses an electric motor 128 that powers a corresponding propeller 127.

[0011] Power for the propulsion system 126 is provided by the solar cells 110. The solar cells 110 can be arranged in a plurality of panels or arrays 111 that are carried by the aircraft 120. Elements of the aircraft (e.g., the wings 122 and/or the stabilizers 123) can include one or more substrates 150. In particular embodiments, as will be discussed in greater detail below, the solar cells 110 (individually, in panel form, and/or in other forms) can be integrated with the underlying substrate 150 to improve the manufacturability, cost performance, and/or structural efficiency of the aircraft 120.

[0012] FIG. 1B is a partially schematic side elevation view of an aerospace system 100 that includes an aircraft 120 having a different configuration than that shown in FIG. 1A. For example, the propulsion system 126 includes a single nacelle 129 and a single propeller 127, and the stabilizers 123 are oriented orthogonal to each other. The solar cells 110 are integrated with the aircraft structure in a manner identical to or generally similar to that of the aircraft 120 shown in FIG. 1A. FIGS. 2-4C illustrate further details of representative integration techniques, as described below.

[0013] FIG. 2 is a partially exploded, isometric illustration of a portion of a solar cell assembly 156 configured in accordance with a representative embodiment of the present technology. The assembly 156 can include the substrate 150, which carries multiple solar cells 110. Optionally, the assembly 156 can further include a protective cover 153. The cover 153 can be placed over the outwardly facing first or active surfaces 112 of the solar cells 110 to protect the active surfaces 112 from erosion and/or other environmental degradation factors. The solar cells 110 have an oppositely-facing second or back surface 113 that is attached to the substrate 150. The substrate 150 can have a composite construction. In a particular embodiment, the substrate 150 can include first and second sheets 151a, 151b positioned on opposite sides of a central core 152. In other embodiments, the composite

structure of the substrate **150** can have other physical arrangements within the scope of the present technology.

[0014] In a representative embodiment, the solar cells **110** are integrated with the substrate **150** as part of the manufacturing process for forming the substrate **150**. The resulting structure can be a unitary structure, e.g., one for which the solar cells **110** are bonded intimately with the substrate **150**. For example, as shown in FIG. 2, the elements forming the assembly **156** can be built up in a stacked fashion on a mold element **140**. The mold element **140** can accordingly include a smooth inner mold surface **141** that receives the stacked components forming the assembly **156**. The surface of the assembly **156** positioned against the inner mold surface **141** forms an outwardly-facing, aerodynamic surface **160** of the aircraft **120** shown in FIG. 1. For example, the outwardly-facing surface **160** of the assembly **156** can form the upwardly or outwardly facing exposed portion of the wings **122** and/or the stabilizers **123** shown in FIG. 1. A representative process for forming the assembly **156** is described further below with reference to FIGS. 3A-3D. For purposes of illustration, only portions of representative larger assemblies **156** (e.g., sized to form an entire wing surface or a large section of such a surface) are shown in FIGS. 3A-3D.

[0015] Beginning with FIG. 3A, the mold element **140** (and in particular the inner mold surface **141**) can be shaped in a manner that corresponds to the desired shape of the external surface carrying the solar cells **110**. For example, the inner mold surface **141** can have a profile that produces the curved surfaces of the wings **122** or stabilizers **123** shown in FIG. 1. The illustrated inner mold surface **141** can be shaped to produce an upper wing surface, and a complementary mold element (not shown in FIG. 3A) can have an inner mold surface for forming the lower wing surface. The resulting wing halves can then be bonded together (e.g., at the leading and trailing edges) to form a complete wing.

[0016] In other embodiments, the surfaces can be formed in accordance with other techniques. For example, the inner mold surface **141** can be flat, and the resulting assembly **156** can be flexible enough to be laid over a set of curved ribs or other supports. The assembly **156** (or multiple bonded assemblies **156**) can then be post-cured at elevated temperatures to harden the assemblies **156** into the final curved shape.

[0017] In a particular embodiment in which the protective cover **153** is used to protect the solar cells **110**, the cover **153** can be laid face-down on the inner mold surface **141**. In particular embodiments, the mold surface **141** is polished and/or waxed or otherwise treated to create a surface that the cover **153** and/or other elements forming the assembly will not stick to. The protective cover **153** can include a first adhesive **154** facing upwardly, away from the inner mold surface **141**. The protective cover **153** and the first adhesive **154** can be transparent, at least at the wavelengths that activate the electrical current generation function of the solar cells **110**. The solar cells **110** can then be laid face down onto the protective cover **153**, with the active surfaces **112** in contact with the first adhesive **154**.

[0018] The back or second surfaces **113** (facing upwardly in FIG. 3A) of the solar cells **110** can carry one or more contacts **115** (e.g., pads, terminals, or other structures) for conveying the electrical current generated by the solar cell **110**. The manufacturing process can include attaching electrical connectors **114** to the back surfaces **113** at the contacts **115** (e.g., via a solder joint or other suitable joint) to transmit current from one solar cell **110** to another. The solar cells **110**

can be connected electrically in parallel or in series, depending upon the target voltage and current requirements for a particular array of solar cells **110**. In a typical installation, some solar cells **110** may be arranged in parallel, and others in series. The overall electrical system, which includes the solar cells **110** and the electrical connectors **114**, can also include blocking diodes and/or other circuit elements to control the flow of electrical current among the solar cells **110**.

[0019] In FIG. 3B, a second adhesive **155** has been applied to the back surfaces **113** of the solar cells **110**. Depending upon the embodiment, the second adhesive **155** can be applied with a brush, and/or can take the form of a film, and/or a spray. In a particular embodiment, (for example, when the second adhesive **155** is sprayed on to the solar cells **110**), the process of applying the second adhesive **155** can include placing a mask **180** over the assembly **156**. The mask **180** can include mask apertures or openings **181** that align with the back surfaces **113** of the solar cells **110**, allowing the adhesive to deposit on the back surfaces **113**, without depositing on other surfaces (e.g., the inner mold surface **141**). In other embodiments, the mask **180** can be eliminated and the second adhesive can be applied to the back surfaces **113** and possibly the exposed first adhesive **154** as well.

[0020] In FIG. 3C, the remaining elements of the assembly **156** have been positioned on the exposed first adhesive **154** (carried by the protective sheet **153** and visible in FIG. 3B) and the exposed second adhesive **155** (carried by the back surfaces **113** of the solar cells **110** and visible in FIG. 3B). The remaining elements can include a first sheet **151a**, a second sheet **151b**, and a core **152** positioned between the first and second sheets **151a**, **151b**. The first and second sheets **151a**, **151b** can include a fabric, for example, a glass ply fabric or a carbon ply fabric. Each sheet can include a single ply or multiple plies. The fabric can be woven or unwoven, and can be pre-impregnated with an epoxy or another adhesive (in a “pre-preg” form). In other embodiments, the epoxy or other adhesive can be disposed on the first sheet, the second sheet, and/or the core (e.g., using a wetting-out process), prior to consolidating the elements of the assembly **156**. The core **152** can include a foam core, a honeycomb core or another suitable core, made from fiberglass, aluminum, and/or other suitable low cost, lightweight materials.

[0021] In FIG. 3D, a vacuum bag **170** has been placed over the assembly **156**, and has been sealed to the mold element **140** using a sealant tape **173** or other suitable sealant. Suitable breathers and release films (not shown in FIG. 3D) are used to control the flow of epoxy and/or other resins, adhesives, or matrix materials under vacuum. The vacuum bag **170** is attached to a vacuum source **172** via a vacuum line **171**. The manufacturing process can then include drawing a vacuum on the volume interior to the vacuum bag **170**, thereby compressing and consolidating the elements of the assembly **156**. The assembly **156** can, while under vacuum, be exposed to an elevated temperature (e.g., in a suitable oven or autoclave) to cure the epoxy and/or other adhesive materials that form the bonds between the elements of the assembly **156**.

[0022] In a typical arrangement, the entire assembly **156** is bonded and co-cured simultaneously. In particular, the first and second sheets **151a**, **151b**, the intermediate core **152**, the solar cells **110**, and the electrical connectors **114** (along with other circuit elements, where appropriate) are cured simultaneously. The protective cover **153** can be applied afterwards, or can be co-cured along with the foregoing elements.

[0023] FIGS. 4A-4C illustrate representative cross-sectional views of completed assemblies 156. For purposes of illustration, only portions of the assemblies are shown in FIGS. 4A-4C, and several of the dimensions shown in FIGS. 4A-4C have been exaggerated. FIG. 4A illustrates a portion of an assembly 156 having a single solar cell 110. As shown in FIG. 4A, the pressure (indicated by arrows P) exerted by the vacuum (and/or other suitable arrangement), on the assembly 156 during the manufacturing process by can force the solar cell 110 into the underlying portions of the assembly 156. In a particular embodiment, the solar cell 110 can accordingly form and simultaneously fill a cell recess 157 that is indented into the first sheet 151a and, optionally, the core 152. For example, when the core 152 is a foam core, it can readily indent under vacuum, and when the core 152 is a honeycomb or more rigid core, the indentation may be limited to the first sheet 151a.

[0024] During the curing process, the first adhesive 154, the second adhesive 155 and/or the epoxy and/or other adhesive carried by the first sheet 151a, consolidate and bond the solar cell 110 firmly to the assembly 156. In particular, one or more of the foregoing adhesives can bond the second surface 113 of the solar cell 110 to the bottom 159 of the cell recess 157. One or more of the foregoing adhesives can bond the edge or side surfaces 116 of the solar cell 110 to corresponding walls 161 of the cell recess 157 via strong cohesive and adhesive bonds. Accordingly, the solar cell 110 becomes highly integrated with the assembly 156 that carries it.

[0025] It is expected that the foregoing arrangement will increase the overall strength of the assembly 156. In particular, the solar cells 110 can carry loads that would normally be carried by the aircraft structure. Such loads include, but are not limited to, compression loads. For example, when the assembly 156 forms part of a wing upper surface, the upper surface can be placed in compression as the wing bends upwardly. Because the solar cells 110 are intimately integrated with the assembly 156 (e.g., via direct contact between the edge/side surfaces 116 of the solar cells 110, and the adjacent walls 161 of the cell recess 157), they can carry the foregoing compression loads. Solar cells that are merely surface mounted on a wing (as is the case with some conventional arrangements) cannot suitably carry such compression loads.

[0026] Because assemblies 156 in accordance with the present technology take advantage of the load-bearing capability of the solar cells 110, other elements of the aircraft that would otherwise be required to provide this load capability can be reduced or eliminated, thus reducing the overall aircraft weight. For example, in an embodiment for which the assembly 156 forms a portion of a wing surface that is supported internally by ribs or other structural elements, the number of ribs or other structural elements can be reduced to produce a corresponding weight reduction. Reducing the aircraft weight can reduce cost, and/or can increase the endurance and/or the payload capacity of the aircraft.

[0027] In particular embodiments, the solar cells can be bare, monocrystalline solar cells, e.g., cells without encapsulants or other packaging. An advantage of monocrystalline cells (as opposed to thin film cells) is that monocrystalline cells have a high energy concentration and can accordingly produce a greater amount of energy per square meter than can thin film cells. A drawback with monocrystalline cells is that they can be very brittle and are also typically very flat. However, by integrating monocrystalline solar cells with the

underlying structure in the manner described above, the brittle characteristics of the solar cell 110 can be mitigated and the support provided by the underlying and integrally connected substrate 150 can allow the solar cells 110 to bend without breaking. In particular, assemblies 156 made in accordance with the techniques described herein can be bent into a curved shape having a 1.5 foot radius, without breaking the solar cells 110 carried by the substrate 156. Even if a solar cell 110 does break under load, the presence of the underlying structural elements can be sufficient to preserve at least some of the electrical continuity provided by the solar cells 110 and the contacts 114, so that the solar cells 110 maintain at least some functionality.

[0028] FIG. 4B is a cross-sectional view of a representative assembly 156 illustrating two solar cells 110 connected by an electrical connector 114. In one aspect of this embodiment, each solar cell 110 forms a corresponding cell recess 157 as it is compacted during the manufacturing process. An inter-cell recess 158 is formed between neighboring cell recesses 157. An inter-cell recess bottom 162 is defined at least in part by the protective cover 153. If the protective cover 153 is not included in the assembly 156, the inter-cell recess bottom 162 can be defined at least in part by the electrical connector 114. In a particular embodiment, the inter-cell recess 158 is present only directly above the electrical connector 114. At positions away from the electrical connector 114 (e.g., into and out of the plane of FIG. 4B), the first sheet 151a and the core 152 can project upwardly between the solar cells 110 so that the outwardly facing surface 160 of the overall assembly 156 remains generally flat.

[0029] FIG. 4C illustrates an assembly 156 having surface contours in accordance with still further embodiments of the present technology. For purposes of comparison, the inter-cell recess bottom 162 shown in FIG. 4B is also shown in FIG. 4C, along with other potential contours for the inter-cell recess bottom, illustrated as first-third recess bottoms 162a-162c. Each of these inter-cell recess bottom contours 162a-162c can result from placing the solar cells 110 closer to each other (thus reducing the depth of the corresponding inter-cell recess 158), up to the limit indicated by the third recess bottom contour 162c, which is generally flat. In still further embodiments, the assembly 156 can include an additional filler material 164, which is placed within the inter-cell recess 158 to reduce the aerodynamic discontinuity presented by the recess, and thereby improve aerodynamic performance. However, in other embodiments, the roughness provided the inter-cell recesses 158 (which may not be visible to the naked eye) can provide aerodynamic advantages, e.g., by delaying flow separation over the wing surface. Accordingly, the size of the inter-cell recesses 158, and whether and to what extent the inter-cell recesses 158 are filled, can be selected based at least in part on the Reynold's number of local flow.

[0030] FIGS. 1A-4C and the associated discussion above describe in general terms techniques and corresponding components used to form load-bearing aircraft structures that include solar cells. The following examples provide additional details of particular embodiments for representative components and techniques.

Solar Cells

[0031] Representative solar cells in accordance with embodiments of the present technology include polycrystalline silicon cells, monocrystalline silicon cells, gallium arsenide cells, and/or other suitable solar cell constructions. In

particular aspects of these embodiments, the solar cells are bare, e.g., without plastic or other mounting substrates and hardware to reduce weight and to improve the integration of the solar cells with the underlying aircraft structure. In a representative embodiment, the solar cell **110** can weigh approximately 500 grams per square meter and the underlying structure can weigh approximately 150 grams per square meter, producing a total assembly weight of approximately 650 grams per square meter. This is expected to be a significant weight reduction compared to existing solar aircraft structures which are typically at least 50% heavier. Other conventional structures, which may include solar cells sandwiched between two sheets of Mylar®, may be relatively light, but are expected to be significantly less durable than structures formed in accordance with embodiments of the present technology.

Sheets

[0032] The first and second sheets can include unwoven or woven fabric, for example, a plain weave fiberglass fabric having a weight of approximately 0.7 ounces per square yard to approximately 5.6 ounces per square yard. In other embodiments, the sheets can include a plain weave carbon fiber having a weight in the same or a similar range. In still further embodiments, the sheets can have other constructions. For example, the sheets can be formed from Kevlar® or other high strength lightweight materials. In addition to these criteria, the sheets can be selected for low cost, tolerance for environmental factors, ease of manufacturability, and formability, among others. In any of these embodiments, as discussed above, the sheets can be pre-impregnated with epoxy or another suitable adhesive, or the adhesive can be applied to the sheets at the time the assembly is manufactured. Suitable epoxies include a 105 Epoxy System available from West Systems of Bay City, Mich., having a cure time of from about 6 hours to about 24 hours based on the selection of the associated hardener. Another representative epoxy includes the MGS L285 Epoxy System, available from MGS Kunstharz Produkte GmbH of Stuttgart, Germany. Suitable cure temperatures for these materials are within the ranges typically provided by the manufacturer.

Core

[0033] Suitable cores for placement between the sheets described above can include foam cores, e.g., Rohacell Foam Core available from Evonik Industries of Essen, Germany, or Airex Foam Core available from Airex AG of Sins, Switzerland. Other suitable cores include Nomex honeycomb core and aluminum honeycomb core, both available from HexCel of Stamford, Conn.

Protective Cover

[0034] Suitable protective covers include Coverite Micro-lite materials, available from Coverite of Champaign, Ill., and So-Lite available from Mountain Models of Appleton, Wis.

[0035] During a typical bonding process, the epoxy bonds quickly to the back surface **113** of the solar cell **110**, thus preventing the epoxy from flowing, seeping, or leaking around or beyond the sides **116** of the solar cell where it might interfere with the ability of the solar cell **110** to receive solar radiation. Because the typical manufacturing process includes placing the assembly under vacuum during curing, bubbles tend not to form in the assembly **156**. This can be a

significant advantage over other bonding techniques because such bubbles, if present during manufacture, can expand and burst when the aircraft reaches high altitude, thus damaging or destroying the surrounding structure.

[0036] One feature of at least some of the foregoing embodiments described above with reference to FIGS. 1A-4C is that the aircraft can include solar cells that are intimately integrated with the aircraft structure. In particular, the solar cells can be bonded to the aircraft structure at the same time the aircraft structure itself is formed and cured. This arrangement can increase the strength of the mechanical and/or chemical bonds between the solar cells and the underlying structure, thus allowing the solar cells to form load-bearing portions of the overall structure. As discussed above, this in turn can reduce the requirements for other load-bearing structures of the aircraft which in turn can reduce the overall weight of the aircraft.

[0037] From the foregoing, it will be appreciated that specific embodiments of the present technology have been described herein for purposes of illustration, but that various modifications may be made without deviating from the technology. For example, the protective cover material, the foam core, the first and second sheets, and/or other elements of the overall structure can have compositions different than those expressly disclosed herein. In particular embodiments, the solar cells can be carried by other structures, in addition to or in lieu of the wings and stabilizers described above. Such structures can include fuselage or empennage surfaces, and/or other surfaces that are sufficiently exposed to solar indication. The aircraft can be ground-launched, dropped from other aircraft, and/or deployed in other manners. Particular embodiments of solar cells integrated with corresponding structure were described in the context of high altitude, long endurance aircraft. Other embodiments of the presently-disclosed technology can be implemented in varying manners on other aircraft and/or in the context of other structures, e.g., blimps, spacecraft, and/or other applications where low weight and low cost can provide significant advantages.

[0038] Certain aspects of the technology described in the context of particular embodiments may be combined or eliminated in other embodiments. For example, the protective coating can be eliminated in at least some embodiments for which such a coating is unnecessary, and/or the benefit of such a coating does not outweigh the cost and/or the weight of the coating. Further, while advantages associated with certain embodiments of the present technology have been described in the context of those embodiments, other embodiments may also exhibit such advantages, and not all embodiments need necessarily exhibit such advantages to fall within the scope of the present technology. Accordingly, the present disclosure and associated technology can encompass other embodiments not expressly described or shown herein. The following examples provide additional embodiments of the present technology.

What is claimed is:

1. A method of making a solar cell assembly, comprising: placing backsides of multiple solar cells in contact with a substrate; electrically connecting the solar cells to each other; and applying heat and pressure to the solar cells and the substrate to simultaneously impress the solar cells into the substrate and bond the solar cells to the substrate.
2. The method of claim 1, wherein applying the heat and pressure to the solar cells and the substrate causes the solar

cells to form recesses into the substrate that are simultaneously filled by the solar cells.

3. The method of claim 2, further comprising:

stacking the multiple solar cells and the substrate on a mold surface, the mold surface having a profile that produces a curved surface of a wing or a stabilizer of an aircraft, wherein the heat and pressure is applied while the solar cells and the substrate are stacked on the mold surface.

4. The method of claim 2, further comprising:

applying adhesive between the backsides of the solar cells and the substrate,

wherein the heat and the pressure applied to the solar cells and the substrate causes the adhesive to form bonds between the backsides of the solar cells and bottoms of the recesses.

5. The method of claim 4, wherein the heat and the pressure applied to the solar cells and the substrate causes the adhesive to form bonds between side edges of the solar cells and side walls of the recesses such that the substrate and the solar cells form an intimately integrated assembly that can transmit compressive loads from one solar cell to another via surrounding portions of the substrate along a load path.

6. The method of claim 2, wherein applying the heat and the pressure to the solar cells and the substrate also causes inter-cell recesses in the substrate between one or more of the solar cells, the method further comprising:

filling, at least partially, the inter-cell recesses with a filler material.

7. The method of claim 1, wherein the substrate comprises a composite structure including:

first and second fabric layers coated in adhesive; and
a center core layer disposed between the first and second fabric layers,
wherein the adhesive is cured when applying the heat and the pressure.

8. The method of claim 7, wherein the solar cells are impressed into at least the first fabric layer of the substrate while applying the heat and the pressure.

9. The method of claim 8, wherein the solar cells are impressed into both the first fabric layer and the center core layer of the substrate while applying the heat and the pressure.

10. The method of claim 1, further comprising:

providing a protective layer having an inside surface;
coating the inside surface of the protective layer with a protective layer adhesive to bond the inside surface of the protective layer to active surfaces of the solar cells and portions of the substrate,

wherein the protective layer is transparent to wavelengths that activate a current generation function of the solar cells.

11. The method of claim 10, wherein the solar cells comprise bare crystalline solar cells that are in intimate contact with the protective layer and the substrate.

12. A method for making solar powered aircraft, comprising:

placing multiple bare solar cells on a transparent film bearing a first adhesive with active surfaces of the solar cells against the first adhesive and backside surfaces of the bare solar cells facing away from the transparent film; electrically connecting the bare solar cells; disposing a second adhesive against the backside surfaces of the bare solar cells;

placing a substrate including one or more layers of fabric and a core against the first and second adhesives;

drawing a vacuum on a region including the bare solar cells, the transparent film, and the substrate; and
forming a wing surface or a stabilizer surface by heating the region to simultaneously cure the first and second adhesives and form a cohesive bond between the substrate, the bare solar cells and the transparent film.

13. The method of claim 12, wherein drawing the vacuum causes the bare solar cells to recess into the substrate.

14. The method of claim 13, wherein drawing the vacuum on the region includes drawing the vacuum over a mold surface having a profile of the wing surface or the stabilizer surface.

15. A solar powered aircraft, comprising:

a substrate having a curvature to form a lift surface;
a plurality of solar cells carried by, bonded to, and impressed into the substrate; and

electrical connections between the solar cells carried by the substrate, the electrical connections coupled to link the solar cells together to power the solar powered aircraft while in flight.

16. The solar powered aircraft of claim 15, wherein the solar cells are disposed, at least partially, within recesses impressed into the substrate.

17. The solar powered aircraft of claim 16, wherein the solar cells are bonded along backsides of the solar cells to bottom surfaces of the recesses and along side edges of the solar cells to side walls of the recesses with one or more adhesives to form an intimately integrated assembly that transmits compressive loads from one solar cell to another via surrounding portions of the substrate along one or more load paths.

18. The solar powered aircraft of claim 17, wherein the substrate is a multi-layer substrate and wherein the solar cells are impressed into at least one layer of the multi-layer substrate.

19. The solar powered aircraft of claim 18, wherein the solar cells are impressed into two layers of the multi-layer substrate.

20. The solar powered aircraft of claim 19, wherein the substrate comprises:

first and second fabric layers coated in adhesive material; and

a core layer disposed between the first and second fabric layers,

wherein the adhesive material is cured when applying the heat and the pressure to the solar cells and the substrate to simultaneously bond and shape the solar cells and the substrate into the lift surface of the solar powered aircraft.

21. The solar powered aircraft of claim 17, further comprising:

a protective layer disposed over active surfaces of the solar cells and the substrate with an additional adhesive, wherein the protective layer is transparent to wavelengths that activate a current generation function of the solar cells.

22. The solar powered aircraft of claim 21, wherein the solar cells are crystalline solar cells that are in intimate contact with the protective layer and the substrate without intervening solar cell packages surrounding the solar cells.