



US 20160201888A1

(19) **United States**

(12) **Patent Application Publication**
Ackley et al.

(10) **Pub. No.: US 2016/0201888 A1**

(43) **Pub. Date: Jul. 14, 2016**

(54) **AUDIENCE INTERACTION PROJECTION SYSTEM**

Publication Classification

(71) Applicant: **DISNEY ENTERPRISES, INC.**,
Burbank, CA (US)

(51) **Int. Cl.**
F21V 23/04 (2006.01)
F21V 7/00 (2006.01)
H04N 5/33 (2006.01)
G02B 27/14 (2006.01)

(72) Inventors: **Jonathan Ackley**, Glendale, CA (US);
Lanny Smoot, Thousand Oaks, CA (US);
Alfredo Ayala, West Covina, CA (US)


(52) **U.S. Cl.**
CPC *F21V 23/0478* (2013.01); *G02B 27/141*
(2013.01); *F21V 7/0016* (2013.01); *H04N 5/33*
(2013.01); *G02B 5/12* (2013.01)

(73) Assignee: **DISNEY ENTERPRISES, INC.**,
Burbank, CA (US)

(57) **ABSTRACT**
A process and system capture infrared light that is reflected or emitted from a device to precisely locate the device. The process and system project visible light from a light source toward the device such that the light is precisely targeted at the device. Preferably the visible light passes through an atmosphere containing particulate matter rendering the visible light as a beam that appears to emanate from the device rather than from the light source.

(21) Appl. No.: **14/596,153**

(22) Filed: **Jan. 13, 2015**

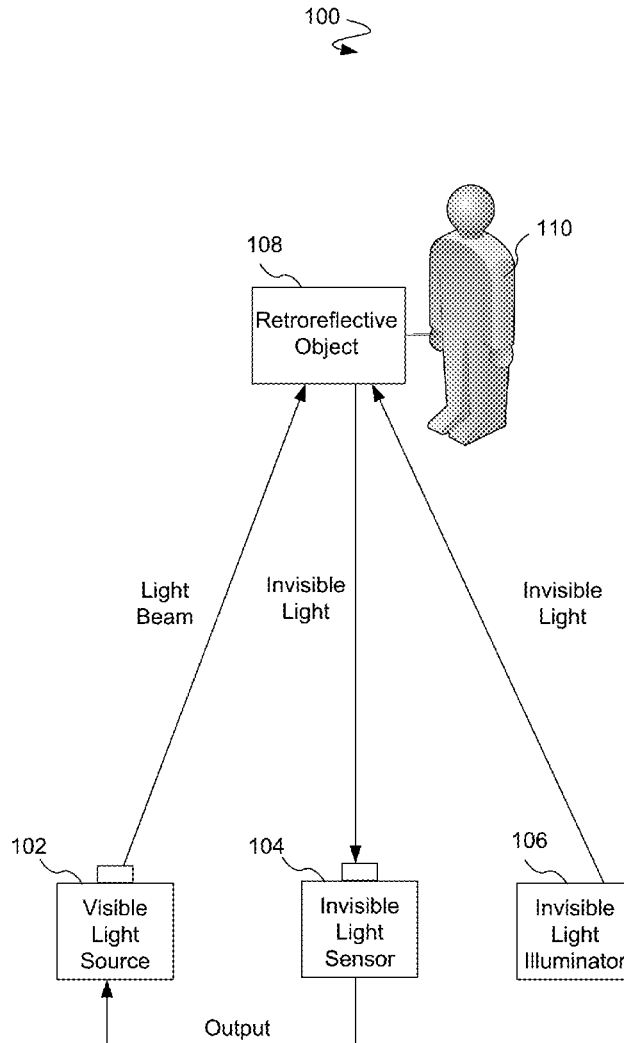

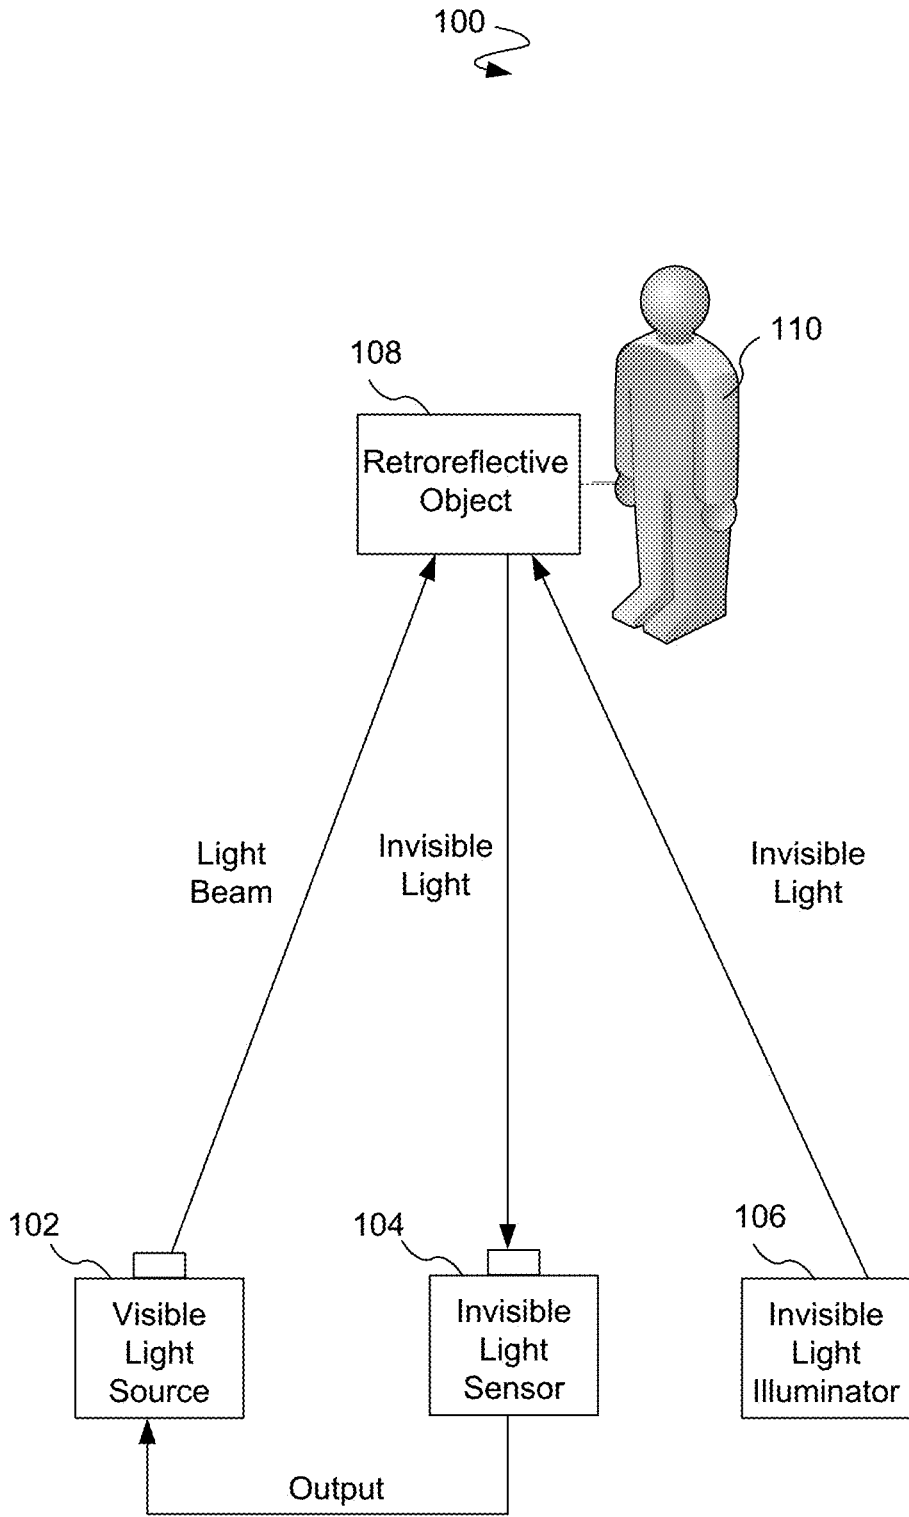


Figure 1A

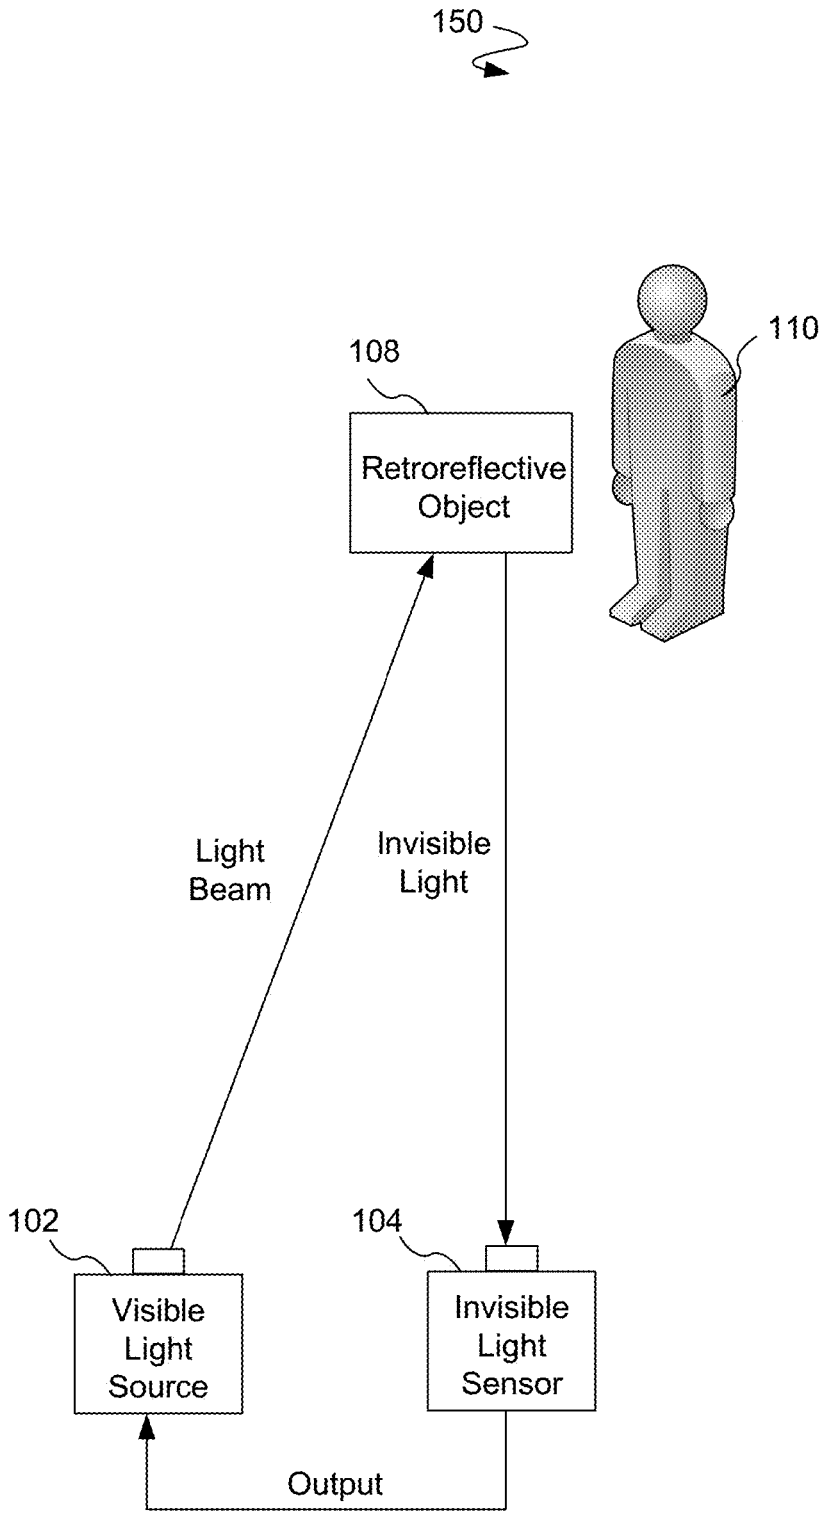


Figure 1B

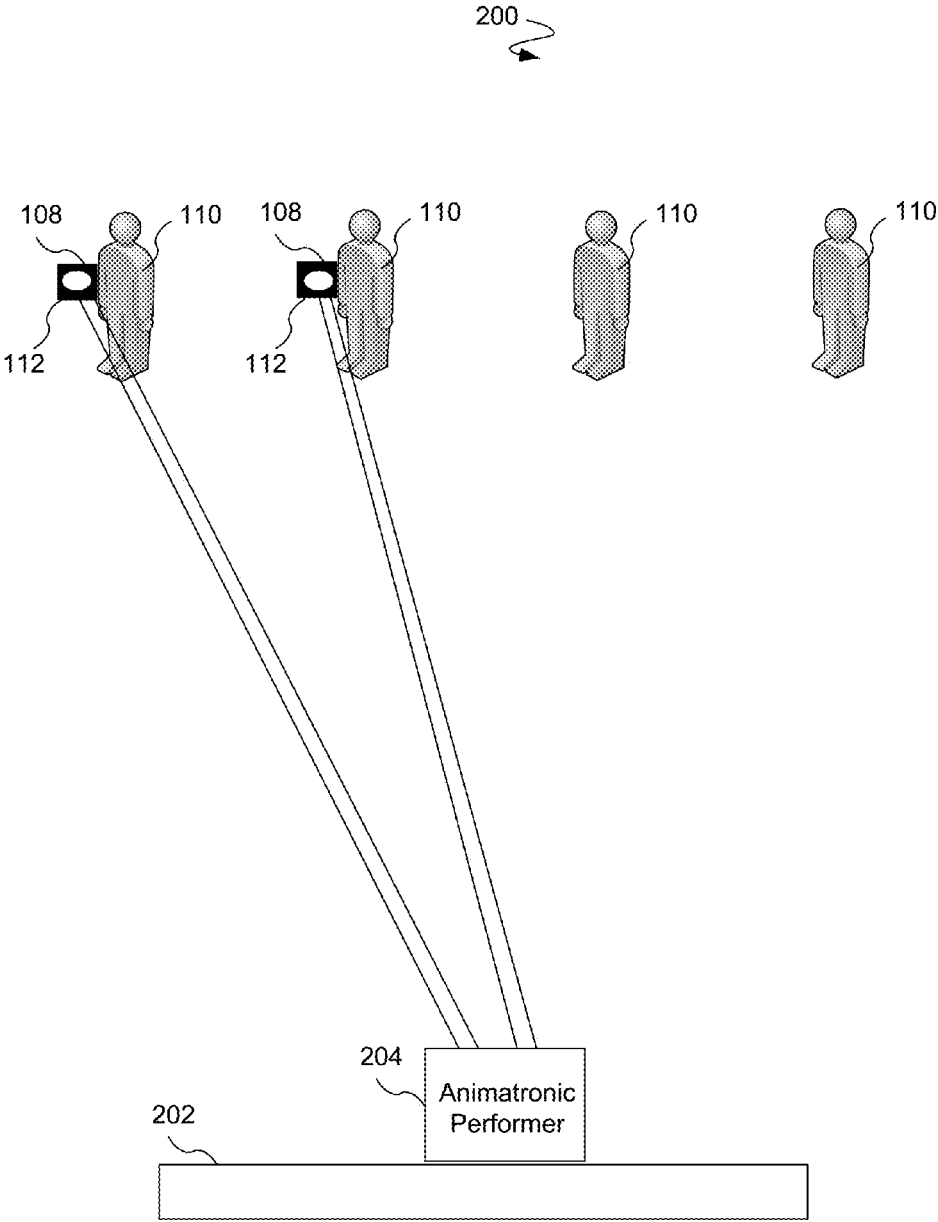


Figure 2A

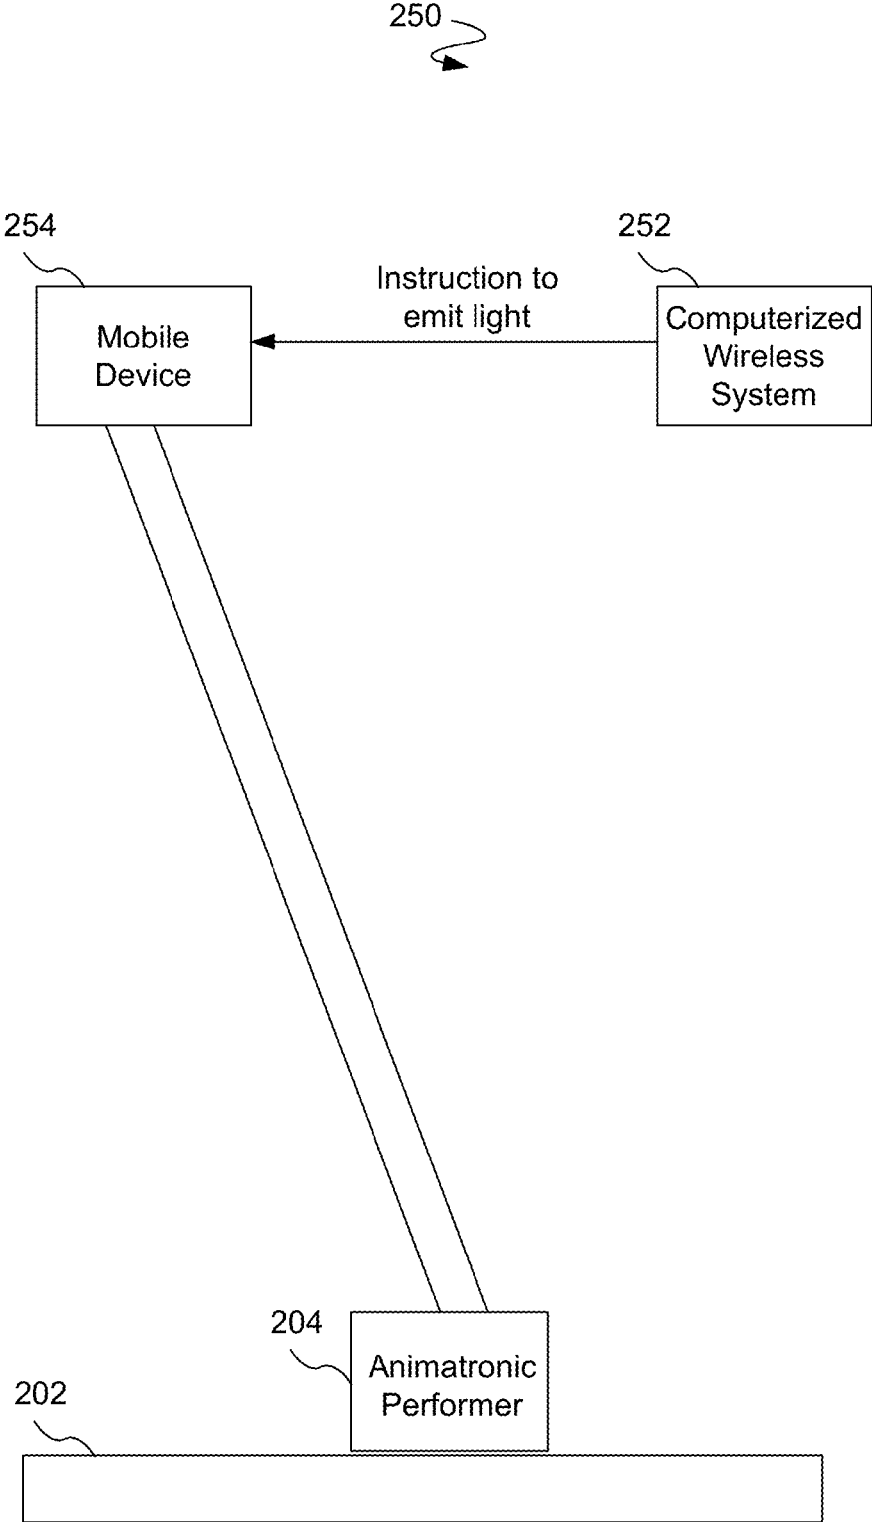


Figure 2B

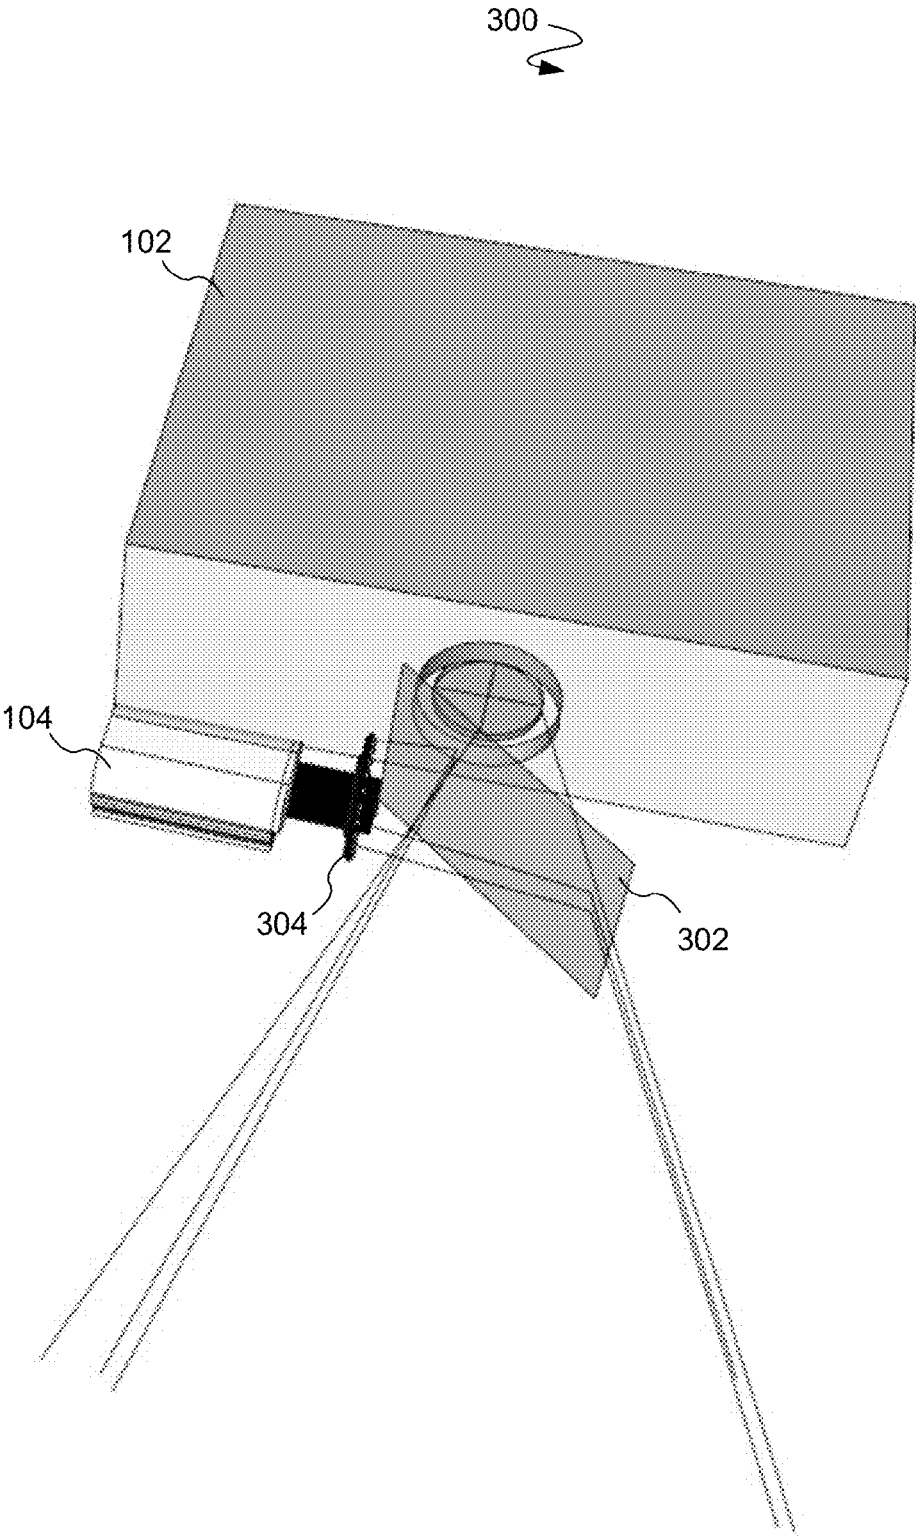


Figure 3

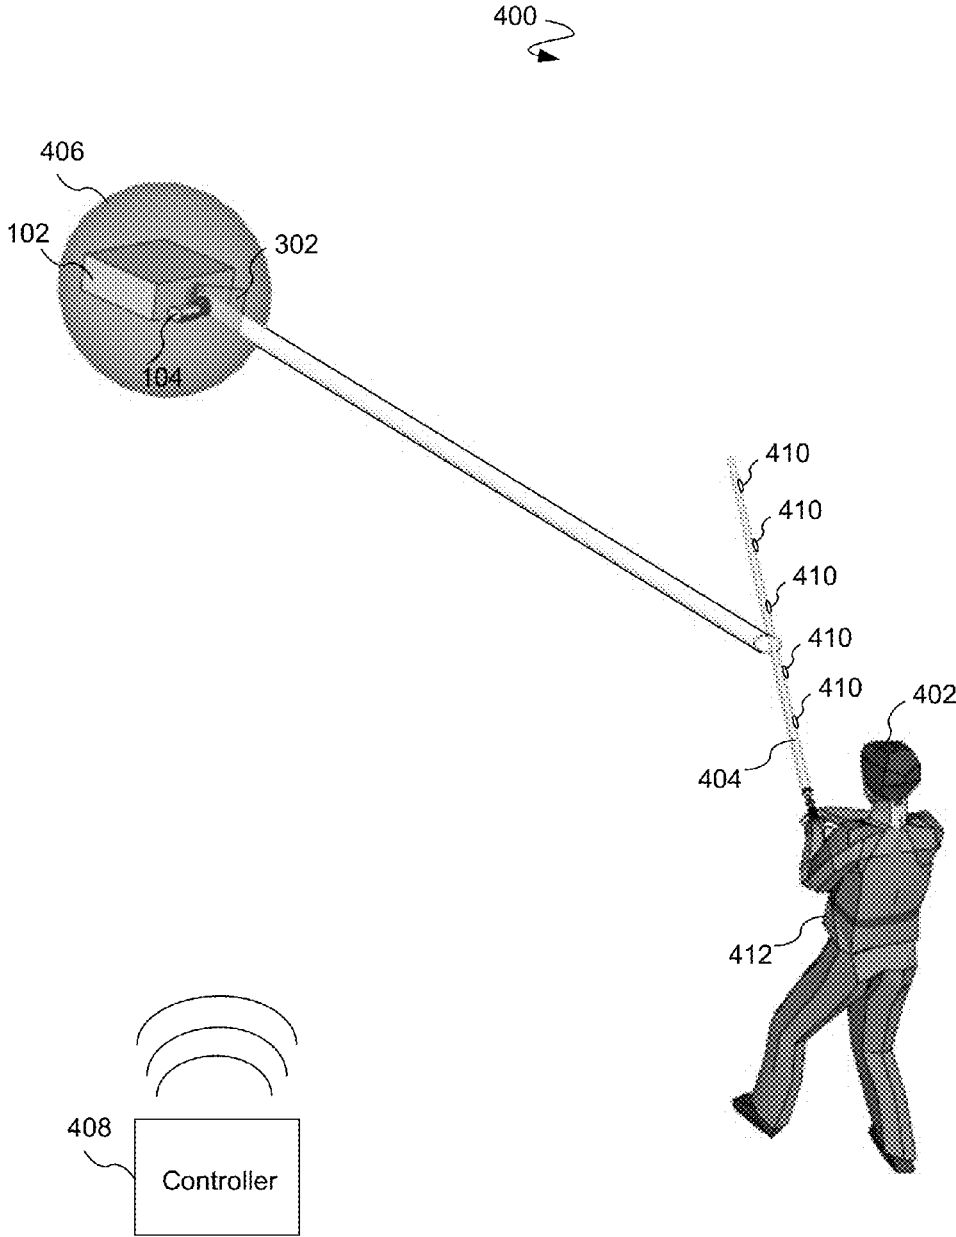


Figure 4

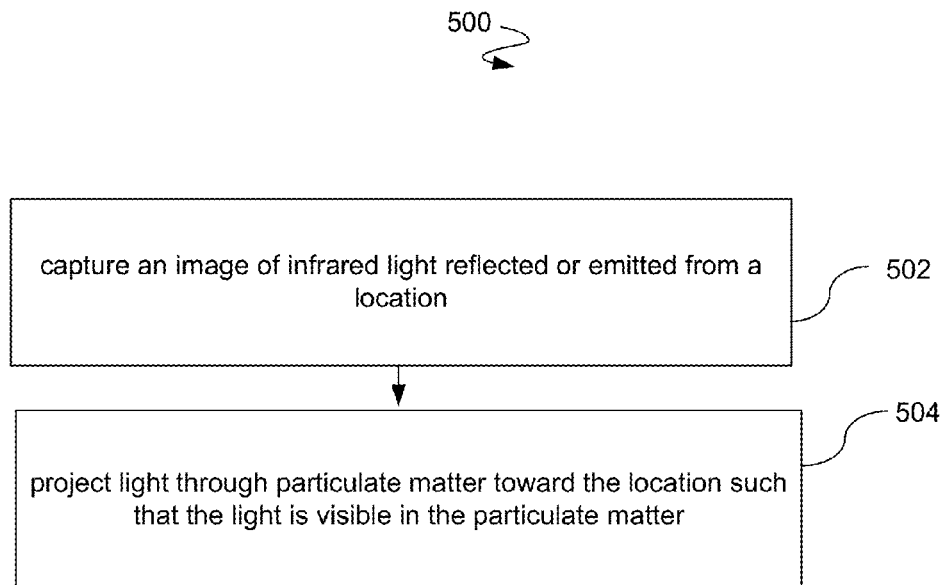


Figure 5

AUDIENCE INTERACTION PROJECTION SYSTEM

BACKGROUND

[0001] 1. Field

[0002] This disclosure generally relates to the field of projection systems. More particularly, the disclosure relates to projections systems that interact with an audience.

[0003] 2. General Background

[0004] Audiences typically watch entertainment such as theatrical performances, movies, lectures, concerts, sporting events and the like in a passive manner (i.e., as observers rather than participants). One contra-example used most often in sporting events and concerts is to give audience members props such as placards or lights that are used during some part of the performance to create an opportunity for audience interaction. However, these devices do not directly interact with the performance and performers occurring on stage or on the field. Hence, most audience members typically watch a performance with little or no participation in the performance.

[0005] The present disclosure relates to a particular technique for using light such as lasers, spotlights, projectors and the like to bridge the visual space between audience members and performers. These light sources are already used in theaters and stadiums, but are typically presented on stage, or within the theatre itself, but not in a manner that effectively engages individual audience members. Directing these types of lighting devices at specific individual audience members is difficult because locating audience members with engaging precision has been difficult as audiences change and audience members move around during the performance. Poorly targeted lighting effects aimed at the audience are not only ineffective, but may also pose safety concerns if powerful lighting is used. For example, audience members may view performers who are using laser beams during a performance, but lasers are not typically directed to or from individual audience members. Lighting devices given to audience members have limited range to inhibit, rather than encourage, audience interaction.

[0006] Therefore, an audience interaction projection system is needed to provide audience interaction with a lighting feature of an entertainment performance.

SUMMARY

[0007] A process and system capture invisible radiation that is reflected or emitted from an object to precisely locate the object. The process and system project visible light from a light source toward the object such that the light is precisely targeted at the object. Preferably, the visible light passes through an atmosphere containing particulate matter rendering the visible light as a beam that appears to emanate from the object rather than from the light source.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The above-mentioned features of the present disclosure will become more apparent with reference to the following description taken in conjunction with the accompanying drawings wherein like reference numerals denote like elements and in which:

[0009] FIG. 1A illustrates an audience interaction projection system.

[0010] FIG. 1B illustrates an audience interaction projection system that operates retroreflection without receiving invisible light from the invisible light source illustrated in FIG. 1A.

[0011] FIG. 2A illustrates an example of a theatrical performance configuration that uses the audience interaction projection system illustrated in FIG. 1.

[0012] FIG. 2B illustrates a mobile communication configuration.

[0013] FIG. 3 illustrates a projection system configuration that uses a beam splitter.

[0014] FIG. 4 illustrates an example in which the audience interaction projection system configuration is used to provide a user with an entertainment experience.

[0015] FIG. 5 illustrates a process that provides audience member or user interaction with an entertainment experience.

DETAILED DESCRIPTION

[0016] An audience interaction projection system provides a lighting feature that provides a new way for an audience member to participate in an entertainment experience, e.g., theatrical performance, theme park feature, concert, sporting event, movie, etc. The audience member may actually feel as if they are launching powerful beams of laser-like light towards objects on the stage. The effect can be accomplished using either totally passive, and low cost materials (like a sheet retroreflector) given to audience members, or can be based on the color of audience apparel or objects they have, or can be done using active (powered) equipment, for instance a battery-powered emitter of visible or invisible light, that the guest brings with them, or is given before a show. In one implementation, the guest is provided with a retroreflective material in the form of a badge, amulet, handheld card, clothing, jewelry or other accessories, etc., that reflects light from the location of the retroreflective material (and thereby, for instance, the guest's hand). The retroreflective material can take various forms (e.g., fabric, paint, optical spheres, reflective corner cube arrays, or other available film or coating with retroreflective properties). The retroreflective material reflects invisible light such as IR light from the location of the object toward the source of the invisible light. The invisible light reflection is captured by an invisible light sensor such as an IR sensor or an IR image capture device located at the source of the invisible light to effectively and precisely identify the location of the retroreflective material and the audience member. A visible light beam having a visible light source co-located with the invisible light source and the invisible light sensor is then projected toward the location of the object which may provide an illusion of the retroreflective object emitting the visible light beam. The visible light beam may be gated or turned off during time periods when the invisible light sensor does not detect any returned invisible light thereby preventing visible light from being emitted towards anything other than the retroreflective objects when they are located thereby enhancing the perception that the visible light is being emitted from the retroreflective object.

[0017] The audience interaction projection system can be used with one or more audience members at the same time. When multiple retroreflective objects are identified, multiple light beams are projected toward each of the identified objects so that each of those intended audience members is provided with the illusion of projecting laser beams from their retroreflective materials. Further, audience members can view their

own laser beams in addition to the laser beams of other audience members through the use of airborne particulate.

[0018] FIG. 1A illustrates an audience interaction projection system **100**. The audience interaction projection system **100** has a visible light source **102**, an invisible light sensor **104**, and an invisible light illuminator **106**. In one implementation, the visible light source **102**, the invisible light sensor **104**, and the invisible light illuminator **106** are boresighted based upon the same optical angle so that they all emit or capture light in a substantially similar field of view over a range of distance suitable for a particular entertainment environment. In another implementation, the visible light source **102**, the invisible light sensor **104**, and the invisible light illuminator **106** are positioned at particular angles and image rectification techniques are used so that they each emit or capture light from a scene as though they were substantially aligned to cover the same optical angle.

[0019] The visible light source **102**, the invisible light sensor **104**, e.g., an IR video camera (however any type of non-visible light may be advantageously used as in narrowband infrared, ultraviolet light, or even radio frequency emanations) or a non-imaging sensor, and the invisible light illuminator **106**, e.g., LED illuminator, IR laser, filament, arc, or other invisible light source with sufficient power and directionality, are positioned in proximity to the entertainment performance. For example, in a theatrical environment the visible light source **102** may be positioned in an animatronic figure on the stage or in a prop of the set itself. The invisible light sensor **104** and the invisible light illuminator **106** may be positioned in the same area as the visible light source **102** or a different area that is in proximity to the entertainment performance such that the invisible light sensor **104** is in the return path of the reflected light or within a certain angle of the visible light source **102**.

[0020] A retroreflective object **108** is worn or held by an audience member **110**. The invisible light illuminator **106** emits IR light toward the retroreflective object **108**, e.g., toward the field of view of the visible light source **102**, the invisible light sensor **104**, and the invisible light illuminator **106**. Therefore, the invisible light may be directed toward a group of retroreflective objects **108** for multiple audience members **110** in the field of view of the visible light source **102**, the invisible light sensor **104**, and the invisible light illuminator **106**.

[0021] The retroreflective object **108** can comprise a material that has retroreflective properties. The material can have a fine texture comprising a set of three orthogonal mirrors, a set of transparent spheres, or a plurality of beads that provide retroreflection.

[0022] The retroreflective object **108** reflects the invisible light toward the invisible light sensor **104**. The invisible light sensor **104** captures an image in the field of view with a brighter patch at the location of the retroreflective object **108**. The invisible light sensor **104** is operably connected to the visible light source **102** to send the output of the invisible light sensor **104** to the visible light source **102**. In one implementation, a processor is used to send a control signal based on the output of the invisible light sensor **104** to the visible light source **102** to toggle the visible light source **102** on or off. In such a configuration, a data processor may provide special effects for the light beams emitted by the visible light source **102**. The data processor, e.g., controller, logic device, etc., can change the colors of the emitted beams, (for all, or some users) and the size, or shape of the projected beam (e.g.

enlarging it to make it more visible in particulate matter). The data processor can also flash the returned beams to provide a “strobing” effect in the projected beams. In addition, if the visible light source **102** and the invisible light illuminator **106** are not boresighted the data processor can perform a rectification of the viewpoints of the camera and projector such that there is a one to one correspondence between lit objects in the invisible light sensor’s view, and objects illuminated by the visible light source **102**.

[0023] In another implementation, the output of the invisible light sensor **104** is sent directly to the visible light source **102** without use of a processor. Therefore, the invisible light sensor **104** sends an image of the area in the field of view with a bright patch designating the location of the retroreflective object **108** to the visible light source **102**. As the visible light source **102** and the invisible light sensor **104** are boresighted or positioned to have the same optical angle, the visible light source **102** projects a spot of light toward the location in the field of view where the bright patch received from the image capture device **102** was received such that the spot of light hits the retroreflective object **108**.

[0024] In particular implementations, the span or volume between the visible light source **102** and the retroreflective object **108** is slightly hazed with particulate matter, e.g., water vapor, condensed water, liquid nitrogen, dust, theatrical fog, etc., so that the beam of light projected from the visible light source **102** to the retroreflective object **108** is visible. As the audience member **110** is unable to tell whether the beam of light is being emitted or received by the retroreflective object **108**, the audience member **110** may perceive that the retroreflective object **108** is emitting the beam of light. As an example, the audience member **110** may be asked during the entertainment performance to raise an amulet with the retroreflective object **108** in the air after an appearance by an animatronic figure. After reflection and image capture are performed by the invisible light illuminator **106** and the invisible light sensor **104** respectively, the visible light source **102** positioned in the animatronic figure projects a light beam that is visible in particulate matter toward the amulet. The audience member **110** is provided with the illusion of the amulet sending a laser beam toward the animatronic figure even though the visible light source **102** in the animatronic figure is really sending the laser beam toward the amulet. The audience interaction projection system **100** may be controlled so as to count the number of returned spots and when a sufficient number have been registered, the animatronic figure could, for instance be destroyed using a special effect. The audience member **110** thinks that the animatronic figure was destroyed as a result of their own, or the combined effect of a number of audience members, sending a laser beam or beams toward the animatronic figure. Therefore, the audience member **110** is provided with the appearance of audience participation with a lighting feature during the entertainment performance.

[0025] The audience interaction projection system **100** can also be used to project visible light based on identification of a particular color of the object **108** and projecting the visible light toward the object **108** based upon identification of that color. For example, an audience member **110** can have a red index card. Light sensor **104** (now configured to detect red light only) detects light reflected from the index card having the particular color red and provides an output to the visible light source **102** that instructs the visible light source **102** to project the visible light towards the red object **108**. If the index card was a different color that was not part of a reflec-

tion criterion, the invisible light sensor **104** would not send the output to the visible light source **102** to project visible light towards the retroreflective object **108**.

[0026] FIG. 1B illustrates an audience interaction projection system **150** that operates without receiving invisible light from the invisible light source **106** illustrated in FIG. 1A. The object **108** illustrated in FIG. 1B is a powered invisible light emitter, e.g., IR emitter, that emits invisible light toward the invisible light sensor **104**.

[0027] FIG. 2A illustrates an example of a theatrical performance configuration **200** that uses the audience interaction projection system **100** illustrated in FIG. 1. The theatrical performance configuration has a stage **202** or other type of designated performance area on which an animatronic performer **204**, e.g., an animatronic figure, provides a theatrical performance. A plurality of audience members **110** are positioned in proximity to the stage **202** to watch and possibly participate in the theatrical performance. For instance, audience members **110** that are positioned toward the left of the animatronic performer **204** from the perspective of the animatronic performer **204** are provided upon entry into the performance area with retroreflective objects **108**, e.g., amulets whereas audience members that are positioned toward the right of the animatronic performer **204** from the perspective of the animatronic performer **204** are not provided with retroreflective objects **108**. When the animatronic performer **204** arrives on the stage **202**, multiple audience members **110** raise their amulets. The animatronic performer has a built in invisible light source **104** illustrated in FIG. 1 that receives an image capture in the field of view of the visible light source **102** of bright spots corresponding to the positions of the retroreflective objects **108**. The visible light source **102** then emits a light beam through particulate matter toward each of the retroreflective objects **108**. The audience members **110** then view multiple laser beams and are provided with the illusion that their retroreflective objects **108** are emitting laser beams toward the animatronic performer **204**.

[0028] In various implementations, objects **112** held or worn by the audience members **110** emit light and are located by such light emissions rather than reflection of light from the invisible light illuminator **106**. For instance, the audience members **110** have objects **112** such as badges with IR LEDs, mobile phones with a screen display of a bright image, etc. that emit light brighter than the light wavelength threshold for the room in which the theatrical performance is provided. The objects **112** may also emit light through visible light communication technology according to a coded pattern, e.g., flashing lights in a particular pattern. The invisible light sensor **104** captures an image over its field of view and detects objects **108** based upon the light wavelength, and/or the intensity threshold being exceeded and/or on the coded pattern being emitted. The visible light source **102** then emits light toward the objects to provide the illusion of the objects emitting a laser beam toward the animatronic performer **204**.

[0029] Further, the light emitted from the objects **108** can be manually activated by the audience members **110** or programmatically by a computerized wireless system. FIG. 2B illustrates a mobile communication configuration **250**. The mobile communication configuration **250** comprises a computerized wireless system **252** that mobile device **254**, e.g., a mobile phone, a tablet device, etc. For instance, the audience members **110** may be told during the entertainment performance by a human performer or a different animatronic performer that they can emit laser beams manually from their

mobile phones **254** if they download an application prior to the animatronic performer **204** approaching the stage **202** and then activate that application when the animatronic performer **204** is on the stage **202**. The application may emit light from the mobile phone **254** that exceeds the light wavelength/intensity threshold for the room in which the entertainment performance is provided or emit light according to a coded pattern. Other light emitters, e.g., candles, lighters, etc., may also be used by the audience members to emit light for image capture and then projection toward the light emitter. The light may also be emitted programmatically by the computerized wireless system **252** sending an instruction to the mobile phones **254** of the audience members **110** that activates the application to emit light. The computerized wireless system **252** may activate light emissions from selected mobile phones, badges, or other light emission devices. For instance, the computerized wireless system **252** can programmatically activate the applications of mobile phones for audience members **108** sitting in particular seats. A centralized processor can be used to in conjunction with applications on various networked mobile devices to enable or disable detection of particular mobile devices by the computerized wireless system **252**. The colors of the laser beams can also be different for different audience members. Different shapes can also be drawn to generate various visual effects for the laser beams. Audio such as music, various “blast” sounds, etc., can also be produced in conjunction with the emission of light by the visible light source **102** and either played out over the handheld wireless devices, or through the venues audio system.

[0030] FIG. 3 illustrates a preferred system configuration **300** that uses a beam splitter **302** for the audience interaction projection system configuration **100** illustrated in FIG. 1. The beam splitter (a “hot” mirror) **302** can both reflect IR light to be captured by the invisible image capture device **104**, (here, an infrared video camera), and reflect outgoing light, (here provided by a ring of infrared LEDs **304**), while allowing visible light from the visible light source **102** (here, a visible light video projector) to pass through. If the invisible light sensor **104** captures IR light reflected from many retroreflective objects **108**, the beam splitter **302** can precisely align (boresight) the paths of the projected visible light from the visible light source **102** to each of the retroreflective objects **108**. In other words, the beam splitter **302** optically aligns the invisible light detector’s field of view with the visible light emitter’s field of view.

[0031] The audience interaction projection system configuration **100** can be used to provide a variety of entertainment experiences. FIG. 4 illustrates an example in which the audience interaction projection system configuration **100** is used to provide a user **402** with an entertainment experience. An entertainment environment **400** has a user **402** with a faux light saber **404** that interacts with a drone **406** flying through the air or operated with hidden rods to appear as if it is flying through the air. The faux light saber **404** has LEDs **410** attached thereto to provide IR light to the drone **406**. As an LED is turned on, an invisible light sensor **104** built into the drone **406** captures an image of the field of view with a bright spot at the position of the activated LED **410**. A visible light source **102** built into the drone **406** then projects light through particulate matter toward the faux light saber **404**. As a result, the user **402** is provided with the illusion that the faux light saber **404** has deflected a laser beam. Multiple LEDs **410** can be activated in sequence at various times to give the user **402**

the impression that the movement by the user **402** of the faux light saber **404** is deflecting multiple laser beams.

[0032] Other special effects such as haptic feedback (not shown) can be provided through use of transducers (not shown) positioned in proximity to the LEDs on the faux light saber **404**. The transducer vibrates after an LED **410** is activated. Thus, the user **402** is provided with more of an impression that the laser beam was deflected by the faux light saber **404**.

[0033] The user **402** can also be provided with the impression that the faux light saber **404** missed some of the laser beams and that the laser beams reached the user **402**. The user **402** is provided with a haptic feedback vest **412** with a plurality of transducers that provide haptic feedback subsequent to the laser beam reaching the user **402** rather than the faux light saber **404**.

[0034] A controller **408** is used to send wireless signals, e.g., IR, radio frequency (“RF”), etc., to the various LEDs **410** and transducers to activate the LEDs **410** and transducers. The controller **408** sends the wireless signals based upon a schedule, an algorithm, a script on controller **408**, etc., or sends the wireless signals based upon manual operator input. A processor (not shown) built into the drone **406** instructs the visible light source **102** to project light that appears as a laser beam in particulate matter in the entertainment environment based upon detection of capture images, e.g., video frames, having bright spots denoting the LEDs **410** emitting IR light.

[0035] The entertainment environment **400** is not limited to use of the drone **406**. Various other animatronic devices, mechanical devices, animated characters, virtual characters, etc. can be used. Further, the user **402** can use props other than the faux light saber **404** or a haptic feedback vest.

[0036] FIG. 5 illustrates a process **500** that provides audience member **110** or user interaction with an entertainment experience. At **502**, the process **500** captures an image of infrared light reflected or emitted from a location. The image of the reflection or emission of the infrared light is used to determine the location of that reflection or emissions. At **504**, the process **500** projects light through particulate matter toward the location such that the light is visible in the particulate matter. The particulate matter helps illuminate a beam of light that can be used as a laser beam in an entertainment performance.

[0037] It is understood that the apparatuses, systems, computer program products, and processes described herein may also be applied in other types of apparatuses, systems, computer program products, and processes. Those skilled in the art will appreciate that the various adaptations and modifications of the aspects of the apparatuses, systems, computer program products, and processes described herein may be configured without departing from the scope and spirit of the present apparatuses, systems, computer program products, and processes. Therefore, it is to be understood that, within the scope of the appended claims, the present apparatuses, systems, computer program products, and processes may be practiced other than as specifically described herein.

We claim:

1. A method comprising:

capturing an image of invisible radiation reflected from or emitted from an object; and

projecting visible light toward the object such that the visible light appears to emanate from the object.

2. The method of claim 1, further comprising emitting the invisible radiation from an invisible radiation illuminator prior to the image being captured.

3. The method of claim 1, further comprising aiming the visible light with a beam splitter that reflects the invisible radiation and allows the visible light to pass through in a direction of the reflected invisible radiation.

4. The method of claim 1, further comprising identifying a particular color of the object and projecting the visible light toward the object based upon identification of that color.

5. An system comprising:

an image capture device that captures an image of invisible radiation reflected from or emitted from an object; and a projector that projects visible light toward the object such that the visible light appears to emanate from the object.

6. The system of claim 5, further comprising an invisible radiation illuminator that emits the invisible radiation.

7. The system of claim 5, wherein the object is a retroreflective device.

8. The system of claim 5, further comprising particulate matter through which the visible light is projected.

9. The system of claim 8, wherein the particulate matter is selected from the group consisting of: water vapor, condensed water, liquid nitrogen, dust, and theatrical fog.

10. The system of claim 5, further comprising a processor that instructs the projector to project the light based upon detection of a coded pattern in the image.

11. The system of claim 5, further comprising a processor that instructs the projector to project the light based upon detection of a wavelength of the infrared light exceeding a wavelength intensity threshold.

12. The system of claim 5, further comprising a beam splitter that that reflects the invisible radiation and allows the visible light to pass through in a direction of the reflected invisible radiation.

13. An apparatus comprising:

an invisible radiation emitter that is co-located with an object;

an image capture device that captures an image of invisible radiation emitted from the invisible radiation emitter; and

a projector that projects visible light toward the object such that the visible light appears to emanate from the object.

14. The apparatus of claim 13, wherein the invisible radiation emitter is an infrared illuminator.

15. The apparatus of claim 13, wherein the object is a retroreflective device.

16. The apparatus of claim 13, further comprising particulate matter through which the visible light is projected.

17. The apparatus of claim 16, wherein the particulate matter is selected from the group consisting of: water vapor, condensed water, liquid nitrogen, dust, and theatrical fog.

18. The apparatus of claim 13, further comprising a processor that activates emission of the invisible radiation from the invisible radiation emitter.

19. The apparatus of claim 13, wherein the infrared emitter is a mobile device.

20. The apparatus of claim 19, further comprising a centralized processor that enables the mobile device to be detected or disabled from detection by the apparatus.

21. The apparatus of claim 19, wherein the mobile device emits one or more sounds that enhance the effect of the user launching a beam of light.

22. The apparatus of claim 13, further comprising a processor that activates a transducer to provide haptic feedback in proximity to the object.

* * * * *