



(12) **United States Patent**
Bernstein et al.

(10) **Patent No.:** **US 9,342,073 B2**
(45) **Date of Patent:** **May 17, 2016**

(54) **SELF PROPELLED DEVICE WITH
MAGNETIC COUPLING**

(58) **Field of Classification Search**

None

See application file for complete search history.

(71) Applicant: **Sphero, Inc.**, Boulder, CO (US)

(56) **References Cited**

(72) Inventors: **Ian H. Bernstein**, Boulder, CO (US);
Adam Wilson, Longmont, CO (US);
Chun Kong, Hong Kong (CN); **Ross
MacGregor**, Erie, CO (US)

U.S. PATENT DOCUMENTS

3,683,216	A	8/1972	Post
3,821,995	A	7/1974	Aghnides
4,519,466	A	5/1985	Shiraishi
4,996,468	A	2/1991	Field et al.
5,213,176	A	5/1993	Oroku et al.

(Continued)

(73) Assignee: **Sphero, Inc.**, Boulder, CO (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

FOREIGN PATENT DOCUMENTS

(21) Appl. No.: **14/691,349**

CN	201147642	Y	11/2008
CN	20120111		4/2009

(22) Filed: **Apr. 20, 2015**

(Continued)

(65) **Prior Publication Data**

US 2015/0224941 A1 Aug. 13, 2015

OTHER PUBLICATIONS

Non-Final Office Action mailed Oct. 16, 2012, for related U.S. Appl. No. 13/342,853, filed Feb. 19, 2013, 10 pages.

(Continued)

Related U.S. Application Data

(63) Continuation-in-part of application No. 14/459,235, filed on Aug. 13, 2014, now Pat. No. 9,090,214, which is a continuation-in-part of application No. 14/035,841, filed on Sep. 24, 2013, now Pat. No.

(Continued)

Primary Examiner — John Walters

Assistant Examiner — Hilary L Johns

(57) **ABSTRACT**

A self-propelled device includes a spherical housing and an internal drive system including one or more motors. The internal drive system acts to provide power to an interior surface of the spherical housing, thereby causing the self-propelled device to move. A biasing assembly can be included to enable the internal drive system to continuously engage an inner surface of the spherical housing. An external accessory magnetically interacts with interior magnetic components through the spherical housing such that as the self-propelled device rotates and maneuvers, the accessory component maintains a positional relationship to a top portion of the self-propelled device.


(51) **Int. Cl.**

G05D 1/00	(2006.01)
A63H 30/04	(2006.01)
A63H 33/00	(2006.01)
A63H 33/26	(2006.01)
G05D 1/02	(2006.01)

(52) **U.S. Cl.**

CPC **G05D 1/0022** (2013.01); **A63H 30/04** (2013.01); **A63H 33/005** (2013.01); **A63H 33/26** (2013.01); **G05D 1/027** (2013.01); **G05D 2201/0214** (2013.01); **Y10S 901/01** (2013.01)

19 Claims, 13 Drawing Sheets

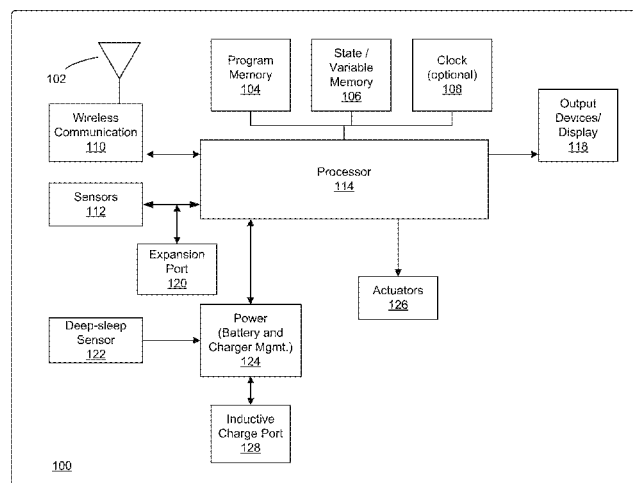

Related U.S. Application Data

9,193,404, which is a continuation of application No. 13/342,853, filed on Jan. 3, 2012, now Pat. No. 8,571,781.

- (60) Provisional application No. 61/149,441, filed on Apr. 17, 2015, provisional application No. 61/553,923, filed on Oct. 31, 2011, provisional application No. 61/430,023, filed on Jan. 5, 2011, provisional application No. 61/430,083, filed on Jan. 5, 2011.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,297,981 A	3/1994	Maxim et al.	8,670,889 B2	3/2014	Kaznov
5,628,232 A	5/1997	Bakholdin et al.	8,672,062 B2	3/2014	Schroll et al.
5,739,657 A	4/1998	Takayama et al.	8,788,130 B1	7/2014	Tran et al.
5,793,142 A	8/1998	Salter et al.	8,838,273 B2	9/2014	Hvass et al.
5,952,796 A	9/1999	Colgate et al.	8,862,301 B2	10/2014	Araki et al.
6,144,128 A	11/2000	Rosen	9,011,197 B2	4/2015	Smoot et al.
6,227,933 B1	5/2001	Michaud et al.	9,014,848 B2	4/2015	Farlow et al.
6,246,927 B1	6/2001	Dratman	2003/0093182 A1	5/2003	Yokoyama
6,320,352 B2 *	11/2001	Terazoe 320/108	2004/0002843 A1	1/2004	Robarts et al.
6,458,008 B1	10/2002	Hyneman	2004/0168837 A1	9/2004	Michaud et al.
6,459,955 B1	10/2002	Bartsch et al.	2004/0182614 A1	9/2004	Wakui
6,573,883 B1	6/2003	Bartlett	2004/0186623 A1	9/2004	Dooley et al.
6,615,109 B1	9/2003	Matsuoka et al.	2005/0226192 A1	10/2005	Red et al.
6,764,373 B1	7/2004	Osawa et al.	2005/0264472 A1	12/2005	Rast
6,785,590 B2	8/2004	Kasuga et al.	2006/0095158 A1	5/2006	Lee et al.
6,945,843 B1	9/2005	Motosko	2006/0101465 A1	5/2006	Kato et al.
6,980,956 B1	12/2005	Takagi et al.	2006/0271251 A1	11/2006	Hopkins
7,069,113 B2	6/2006	Matsuoka et al.	2007/0112462 A1	5/2007	Kim et al.
7,170,047 B2	1/2007	Pal	2007/0249422 A1	10/2007	Podoloff
7,173,604 B2	2/2007	Marvit et al.	2007/0259592 A1	11/2007	Imai et al.
7,258,591 B2	8/2007	Xu et al.	2008/0033641 A1	2/2008	Medalia
7,340,077 B2	3/2008	Gokturk et al.	2008/0182479 A1	7/2008	Elliott et al.
7,344,430 B2	3/2008	Hasty et al.	2008/0240507 A1	10/2008	Niwa et al.
7,432,718 B2	10/2008	Ishihara et al.	2008/0263628 A1	10/2008	Norman et al.
7,463,001 B2	12/2008	Tsurukawa	2008/0267450 A1	10/2008	Sugimoto et al.
7,526,362 B2	4/2009	Kim et al.	2008/0269949 A1	10/2008	Norman et al.
7,714,880 B2	5/2010	Johnson	2009/0055019 A1	2/2009	Stiehl et al.
7,726,422 B2	6/2010	Sun et al.	2009/0057238 A1	3/2009	Garti
7,822,507 B2	10/2010	Ishihara et al.	2009/0078484 A1 *	3/2009	Kocijan 180/167
7,847,504 B2	12/2010	Hollis	2009/0081923 A1	3/2009	Dooley et al.
7,853,357 B2	12/2010	Sawada et al.	2009/0204261 A1	8/2009	Strand et al.
7,957,837 B2	6/2011	Ziegler et al.	2009/0226035 A1	9/2009	Iihoshi et al.
7,979,162 B2	7/2011	Niemela et al.	2009/0262074 A1	10/2009	Nasiri et al.
8,025,551 B2	9/2011	Torres et al.	2010/0010669 A1	1/2010	Lee et al.
8,038,504 B1	10/2011	Wong	2010/0032224 A1	2/2010	Liu
8,099,189 B2	1/2012	Kaznov et al.	2010/0063652 A1	3/2010	Anderson
8,128,450 B2	3/2012	Imai	2010/0066676 A1	3/2010	Kramer et al.
8,128,500 B1	3/2012	Borst et al.	2010/0106344 A1	4/2010	Edwards et al.
8,142,287 B2	3/2012	Podoloff	2010/0145236 A1	6/2010	Greenberg et al.
8,180,436 B2	5/2012	Boyden et al.	2010/0169098 A1	7/2010	Patch
8,195,333 B2	6/2012	Ziegler et al.	2010/0172287 A1	7/2010	Krieter
8,197,298 B2	6/2012	Willet	2010/0183195 A1	7/2010	Sharma
8,258,917 B2	9/2012	Cai et al.	2010/0234993 A1	9/2010	Seelinger et al.
8,269,447 B2	9/2012	Smoot et al.	2010/0241289 A1	9/2010	Sandberg
8,274,406 B2	9/2012	Karlsson et al.	2010/0261526 A1	10/2010	Anderson et al.
8,275,544 B1	9/2012	Wells et al.	2010/0264756 A1	10/2010	Lee et al.
8,326,469 B2	12/2012	Phillips et al.	2010/0305778 A1	12/2010	Dorneich et al.
8,352,643 B2	1/2013	Birnbaum et al.	2010/0305781 A1	12/2010	Felix
8,355,818 B2	1/2013	Nielsen et al.	2010/0324753 A1	12/2010	Okumatsu
8,364,136 B2	1/2013	Hoffberg et al.	2011/0003640 A9	1/2011	Ehrman
8,376,756 B2	2/2013	Robb	2011/0018731 A1	1/2011	Linsky et al.
8,392,065 B2	3/2013	Tolstedt et al.	2011/0018794 A1	1/2011	Linsky et al.
8,396,611 B2	3/2013	Phillips et al.	2011/0022196 A1	1/2011	Linsky et al.
8,417,384 B2	4/2013	Togawa et al.	2011/0050940 A1	3/2011	Lanz et al.
8,430,192 B2	4/2013	Gillett	2011/0060492 A1	3/2011	Kaznov
8,456,298 B2	6/2013	Valtonen	2011/0065488 A1	3/2011	Okamura et al.
8,459,383 B1	6/2013	Burget	2011/0071652 A1	3/2011	Brown et al.
8,522,902 B2	9/2013	Gomi et al.	2011/0071702 A1	3/2011	Wang et al.
8,540,038 B1	9/2013	Ullman	2011/0082566 A1	4/2011	Herr et al.
8,571,781 B2	10/2013	Bernstein et al.	2011/0087371 A1	4/2011	Sandberg et al.
8,577,595 B2	11/2013	Zhao et al.	2011/0174565 A1 *	7/2011	Rochat et al. 180/167
8,600,600 B2	12/2013	Jung	2011/0184590 A1	7/2011	Duggan et al.
			2011/0213278 A1	9/2011	Horak et al.
			2011/0234488 A1	9/2011	Ge et al.
			2011/0250967 A1	10/2011	Kulas
			2011/0291926 A1	12/2011	Gokturk et al.
			2011/0313568 A1	12/2011	Blackwell et al.
			2011/0320830 A1	12/2011	Ito
			2012/0009845 A1	1/2012	Schmelzer
			2012/0035799 A1	2/2012	Ehrmann
			2012/0065747 A1	3/2012	Brown et al.
			2012/0083945 A1	4/2012	Oakley et al.
			2012/0106783 A1	5/2012	Chang et al.
			2012/0146775 A1	6/2012	Kudo et al.
			2012/0167014 A1	6/2012	Joo et al.
			2012/0168240 A1 *	7/2012	Wilson et al. 180/167
			2012/0168241 A1	7/2012	Bernstein et al.
			2012/0173018 A1	7/2012	Allen et al.
			2012/0173047 A1	7/2012	Bernstein et al.

(56)

References Cited**U.S. PATENT DOCUMENTS**

2012/0185115	A1	7/2012	Dean	
2012/0193154	A1	8/2012	Wellborn et al.	
2012/0197439	A1	8/2012	Wang et al.	
2012/0200380	A1*	8/2012	Kocijan	335/306
2012/0215355	A1	8/2012	Bewley et al.	
2012/0291926	A1	11/2012	Misra et al.	
2012/0298049	A1	11/2012	Cook et al.	
2012/0298430	A1	11/2012	Schroll et al.	
2012/0311810	A1	12/2012	Gilbert et al.	
2013/0040533	A1	2/2013	Miller	
2013/0050069	A1	2/2013	Ota	
2013/0065482	A1	3/2013	Trickett	
2013/0109272	A1	5/2013	Rindlisbacher	
2013/0113307	A1	5/2013	Kim et al.	
2013/0143482	A1	6/2013	Regier	
2014/0238762	A1	8/2014	Berberian et al.	

FOREIGN PATENT DOCUMENTS

CN	102060060	5/2011
DE	101 46 862 A1	5/2002
JP	03182290 A	8/1991
JP	H07-308462	11/1995
JP	09254838 A	9/1997
JP	2000218578 A	8/2000
JP	2004-148439	5/2004
KR	10-2009-0000013 A	1/2009
KR	10-0969873 B1	7/2010
KR	10-2008-040725 A	5/2011
WO	WO-97/25239 A1	7/1997
WO	WO-2006/049559 A1	5/2006
WO	WO-2012/094349 A2	7/2012

OTHER PUBLICATIONS

Non-Final Office Action mailed Apr. 9, 2013, for related U.S. Appl. No. 13/342,892, filed Jan. 3, 2013, 19 pages.
 International Search Report and The Written Opinion of The International Searching Authority mailed Dec. 3, 2012, for related PCT Application No. PCT/US2012/020115 filed Jan. 3, 2012, 11 pages.
 Non-Final Office Action mailed Apr. 16, 2013, for related U.S. Appl. No. 13/342,884, filed Jan. 3, 2013, 20 pages.
 Notice of Allowance mailed Apr. 19, 2013, for related U.S. Appl. No. 13/342,853, filed Feb. 19, 2013, 11 pages.
 Non-Final Office Action mailed May 13, 2013, for related U.S. Appl. No. 13/342,874, filed Jan. 3, 2012, 17 pages.
 Non-Final Office Action mailed Jun. 3, 2013, for related U.S. Appl. No. 13/342,914, filed Jan. 3, 2012, 32 pages.
 Koshiyama et al., Machine Translation for JP 2000-218578, Aug. 8, 2000, 11 Pages.
 Non-Final Office Action mailed Jun. 13, 2013, for related U.S. Appl. No. 13/342,908, filed Jan. 3, 2012, 36 pages.
 GearBox Ball Prototype Jun. 29, 2010, Pictures from Video [online].
 Orbotix, Inc., Jun. 30, 2010, 91 pages. Retrieved from the

internet:<URL:http://www.youtube.com/watch?v=gRBM7bAaXpU>.

International Search Report and The Written Opinion of The International Searching Authority mailed Aug. 28, 2013, for related PCT Application No. PCT/US2013/041023 filed May 14, 2013, 11 pages.
 Final Office Action mailed Nov. 15, 2013, for related U.S. Appl. No. 13/342,892, filed Jan. 3, 2013, 21 pages.
 Final Office Action mailed Nov. 18, 2013, for related U.S. Appl. No. 13/342,884, filed Jan. 3, 2013, 19 pages.
 Final Office Action mailed Nov. 18, 2013, for related U.S. Appl. No. 13/342,874, filed Jan. 3, 2012, 21 pages.
 Final Office Action mailed Nov. 13, 2013, for related U.S. Appl. No. 13/342,914, filed Jan. 3, 2012, 30 pages.
 Non-Final Office Action mailed Dec. 20, 2013, for related U.S. Appl. No. 13/342,908, filed Jan. 3, 2012, 28 pages.
 Liu, Dalian et al., "Motion Control of a Spherical Mobile Robot by Feedback Linearization," 7th WC on IC&A, Jun. 27, 2008, Chongqing, China, pp. 965-970. 6 pages.
 Shu, Guanghui et al., "Motion Control of Spherical Robot Based on Conservation of Angular Momentum," IEEE Intl Conf on Mechatronics & Automation, Aug. 9, 2012, Changchun, China, pp. 599-604. 6 pages.
 Joshi, Vrunda et al., "Design, modeling and controllability of a spherical mobile robot", 13th Natl Conf on Mechanisms & Machines (NaCoMM07) IISc, Bangalore, India, Dec. 13, 2007, pp. 1-6.
 Harmo, Panu et al., "Moving Eye—Interactive Telepresence over Internet with a Ball Shaped Mobile Robot," Automation Tech Lab, Finland, Oct. 2, 2001. 6 pages. <http://automation.tkk.fi/files/tervetaas/MovingEye4.pdf>.
 Halme, Aarne, et al., "Motion Control of a Spherical Mobile Robot", Helsinki, IEEE AMC '1996, pp. 259-264. 6 pages.
 Non-Final Office Action mailed Apr. 29, 2014, for related U.S. Appl. No. 13/342,874, filed Jan. 3, 2012, 47 pages.
 Final Office Action mailed Jun. 6, 2014, for related U.S. Appl. No. 13/342,908, filed Jan. 3, 2012, 32 pages.
 U.S. Appl. No. 61/362,005, Schmelzer, effective filing date Jul. 7, 2010, 10 pages.
 Final Office Action mailed Sep. 4, 2014, for related U.S. Appl. No. 13/342,874, filed Jan. 3, 2012, 17 pages.
 Notification of Transmittal of International Search Report and The Written Opinion of the International Searching Authority mailed Aug. 26, 2014, for related PCT Application No. PCT/US2014/037013 filed May 6, 2014, 10 pages.
 European Search Report and European Search Opinion mailed Nov. 6, 2014, for related EP Application No. 12731945.7 filed Jul. 26, 2013. 7 pages.
 PCT/US2014/059973 filed Sep. 10, 2014, 13 pages.
 International Search Report and The Written Opinion of The International Searching Authority mailed Mar. 2, 2015, for related PCT Application No. PCT/US2014/068606 filed Dec. 4, 2014, 9 pages.
 International Search Report and The Written Opinion of The International Searching Authority mailed Aug. 13, 2015, for related PCT Application No. PCT/US2015/030877 filed May 14, 2015, 7 pages.

* cited by examiner

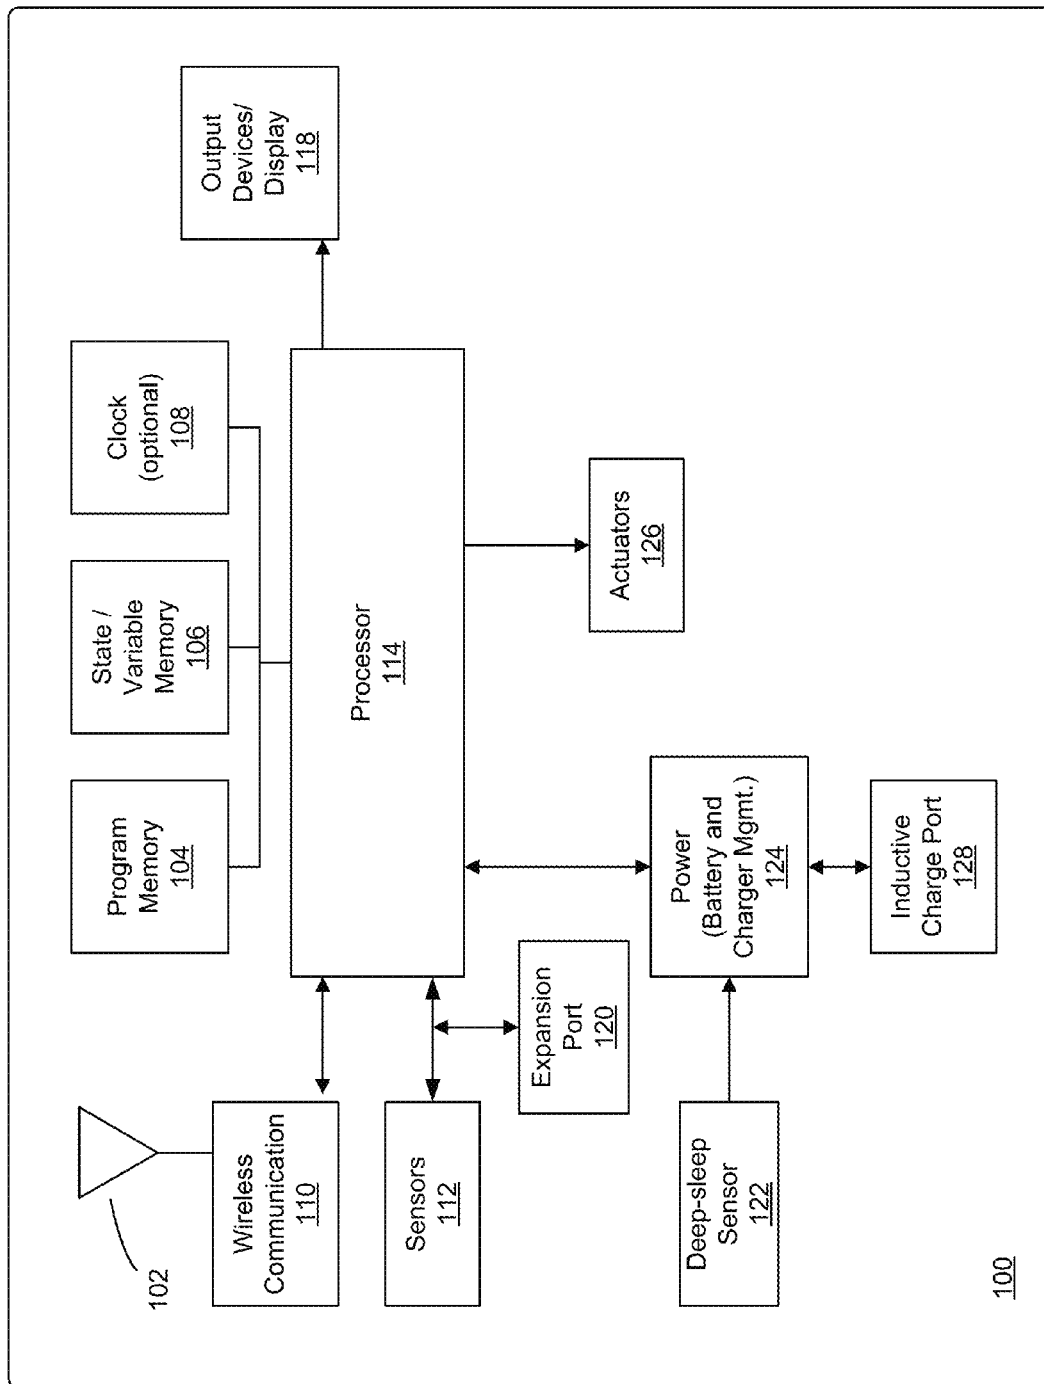


FIG. 1

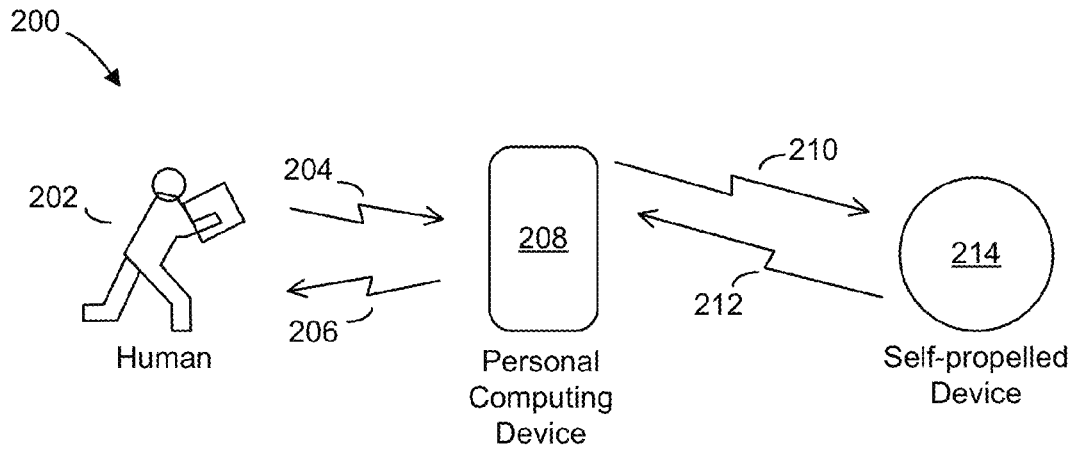


FIG. 2A

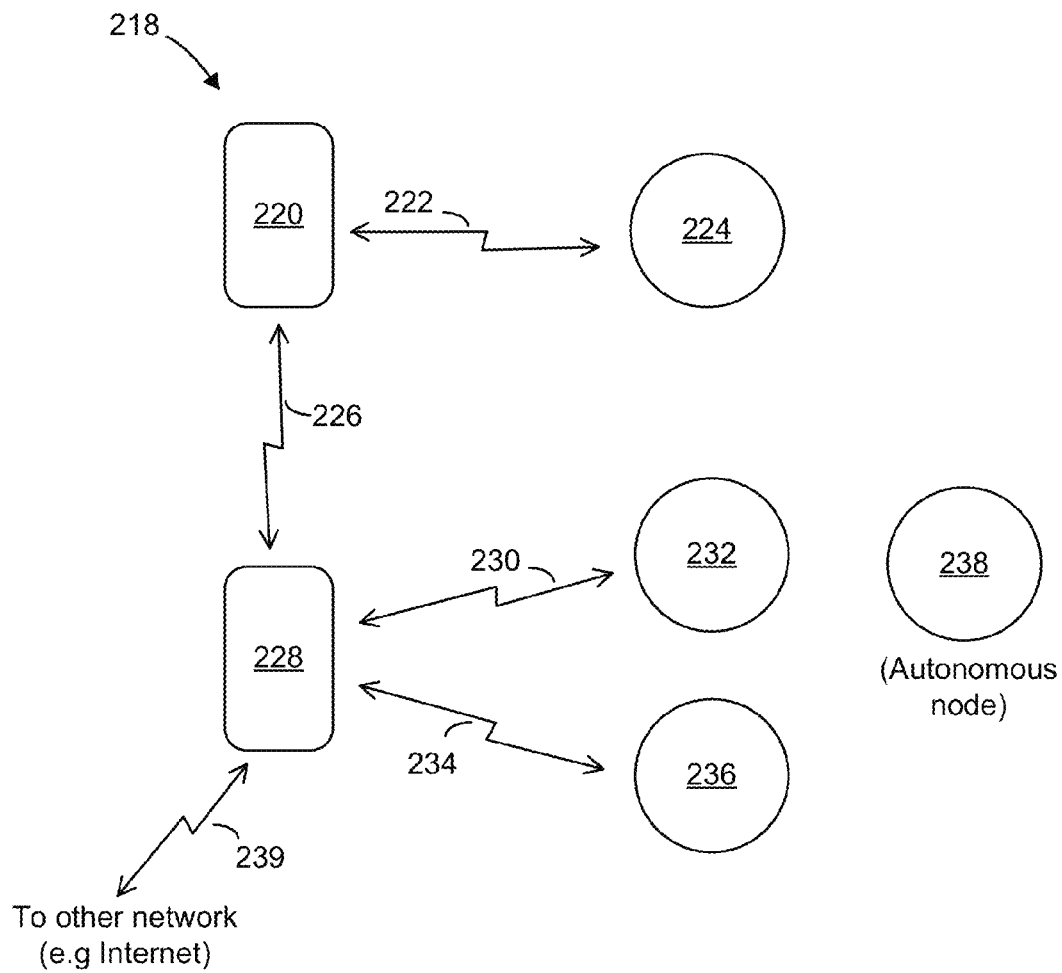


FIG. 2B

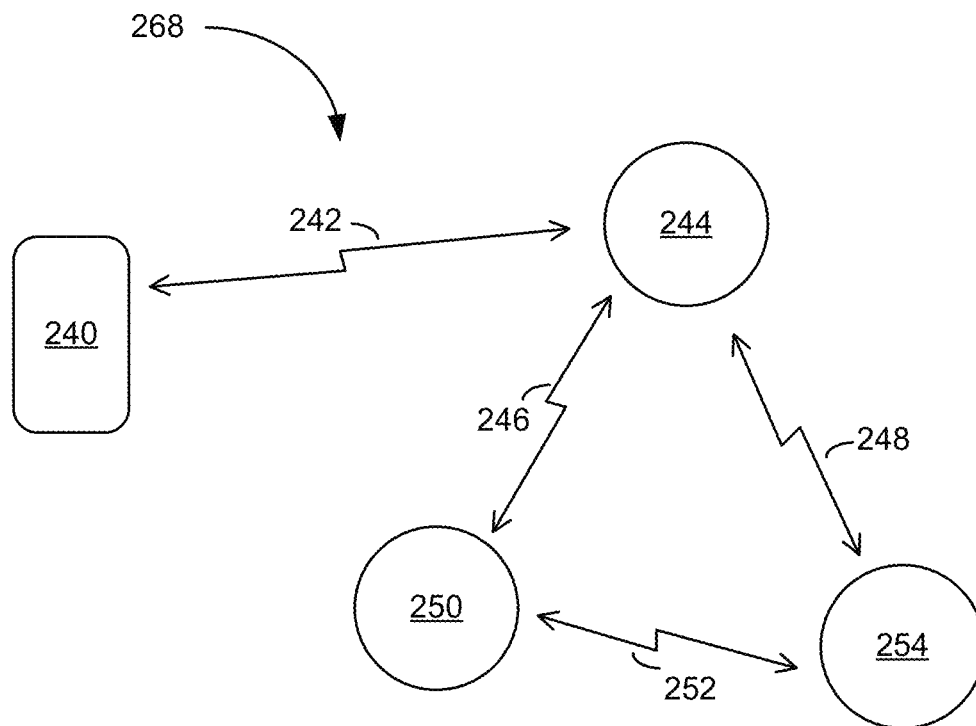


FIG. 2C

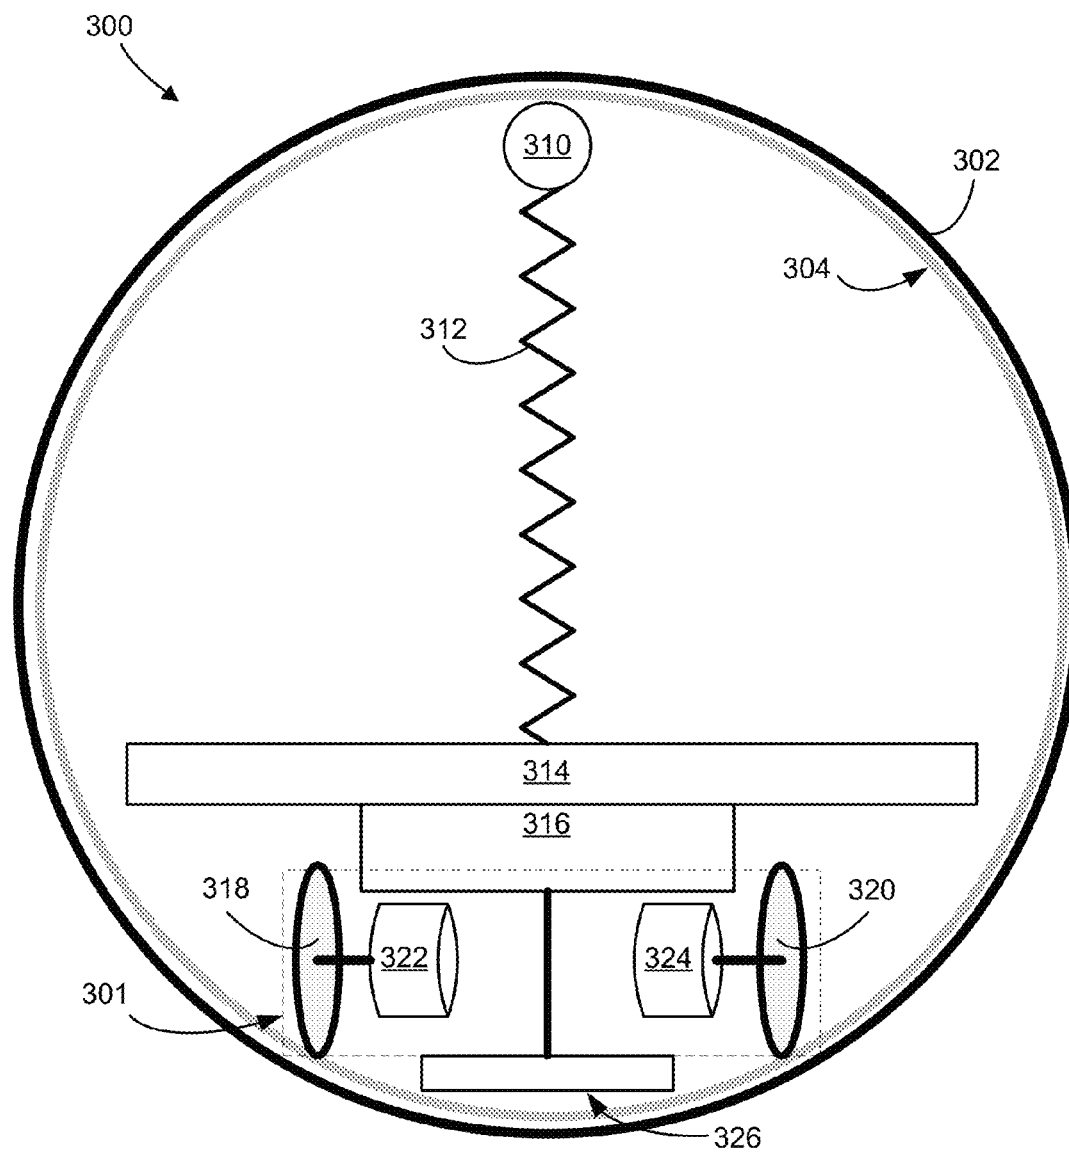


FIG. 3A

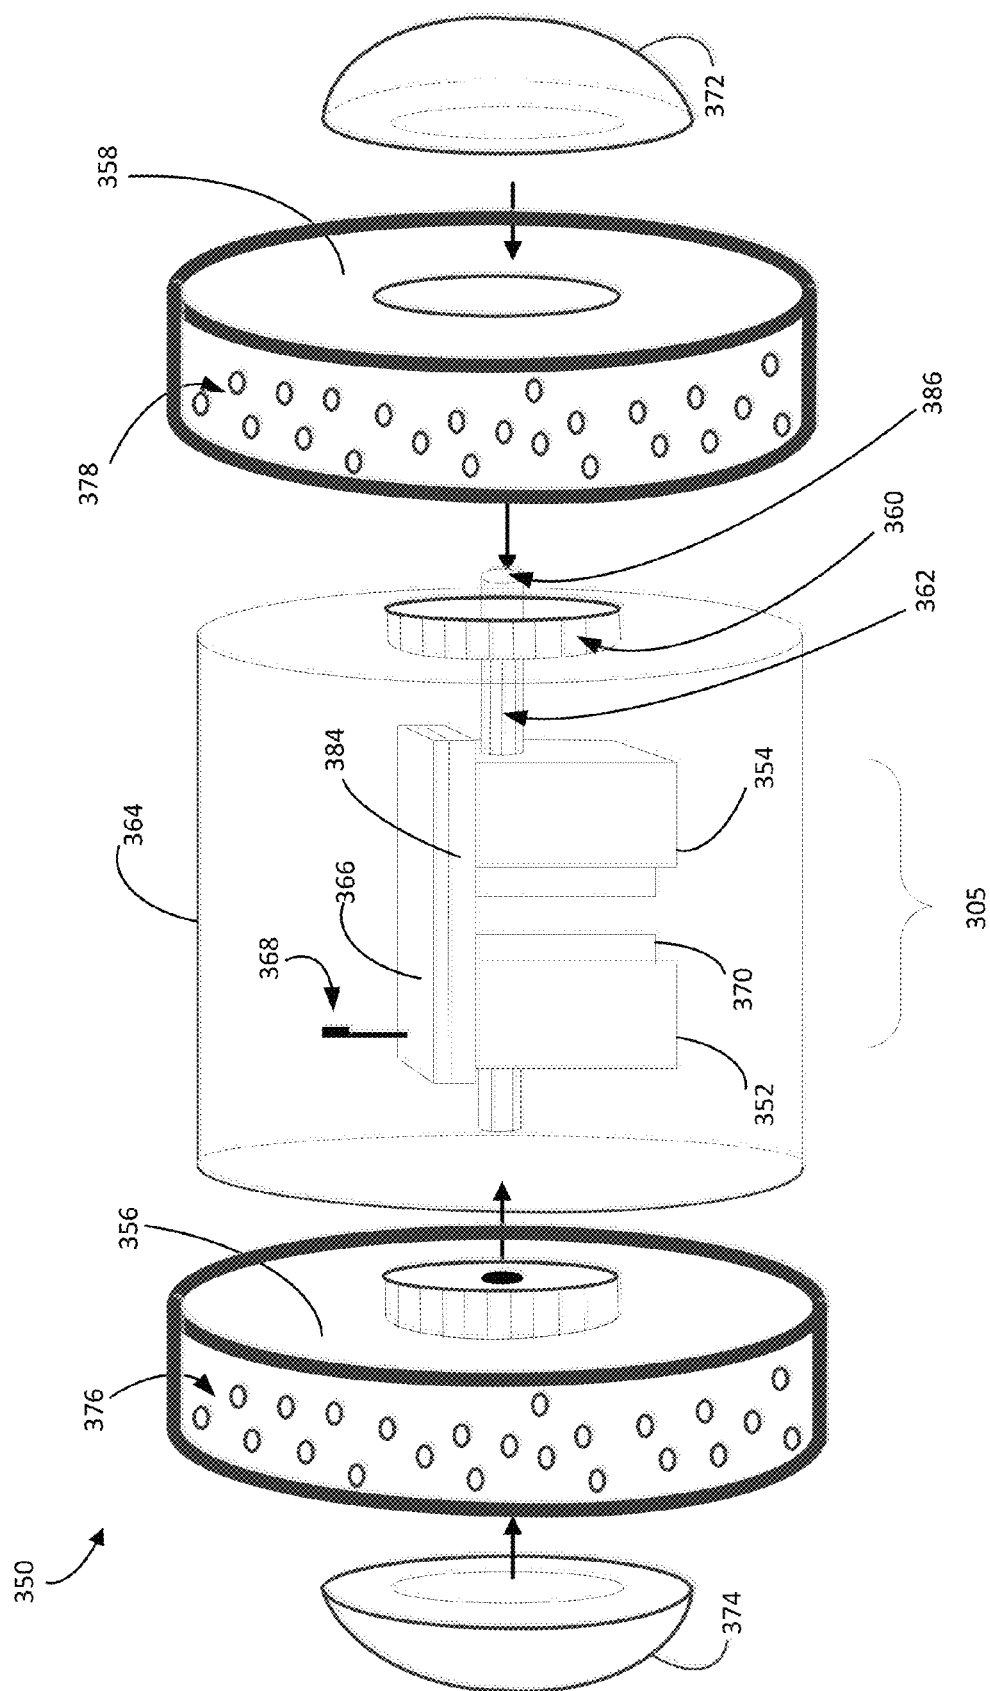


FIG. 3B

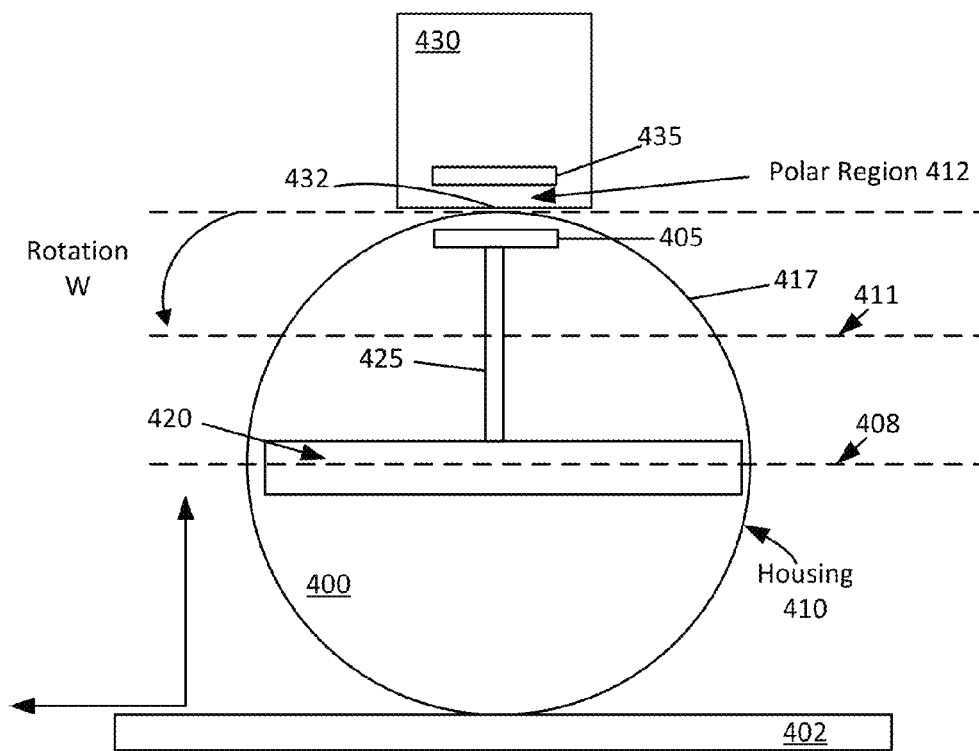


FIG. 4A

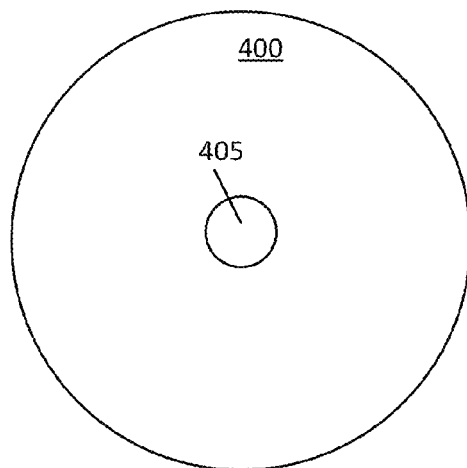


FIG. 4B




FIG. 4C

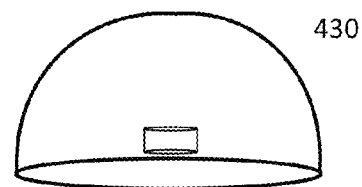
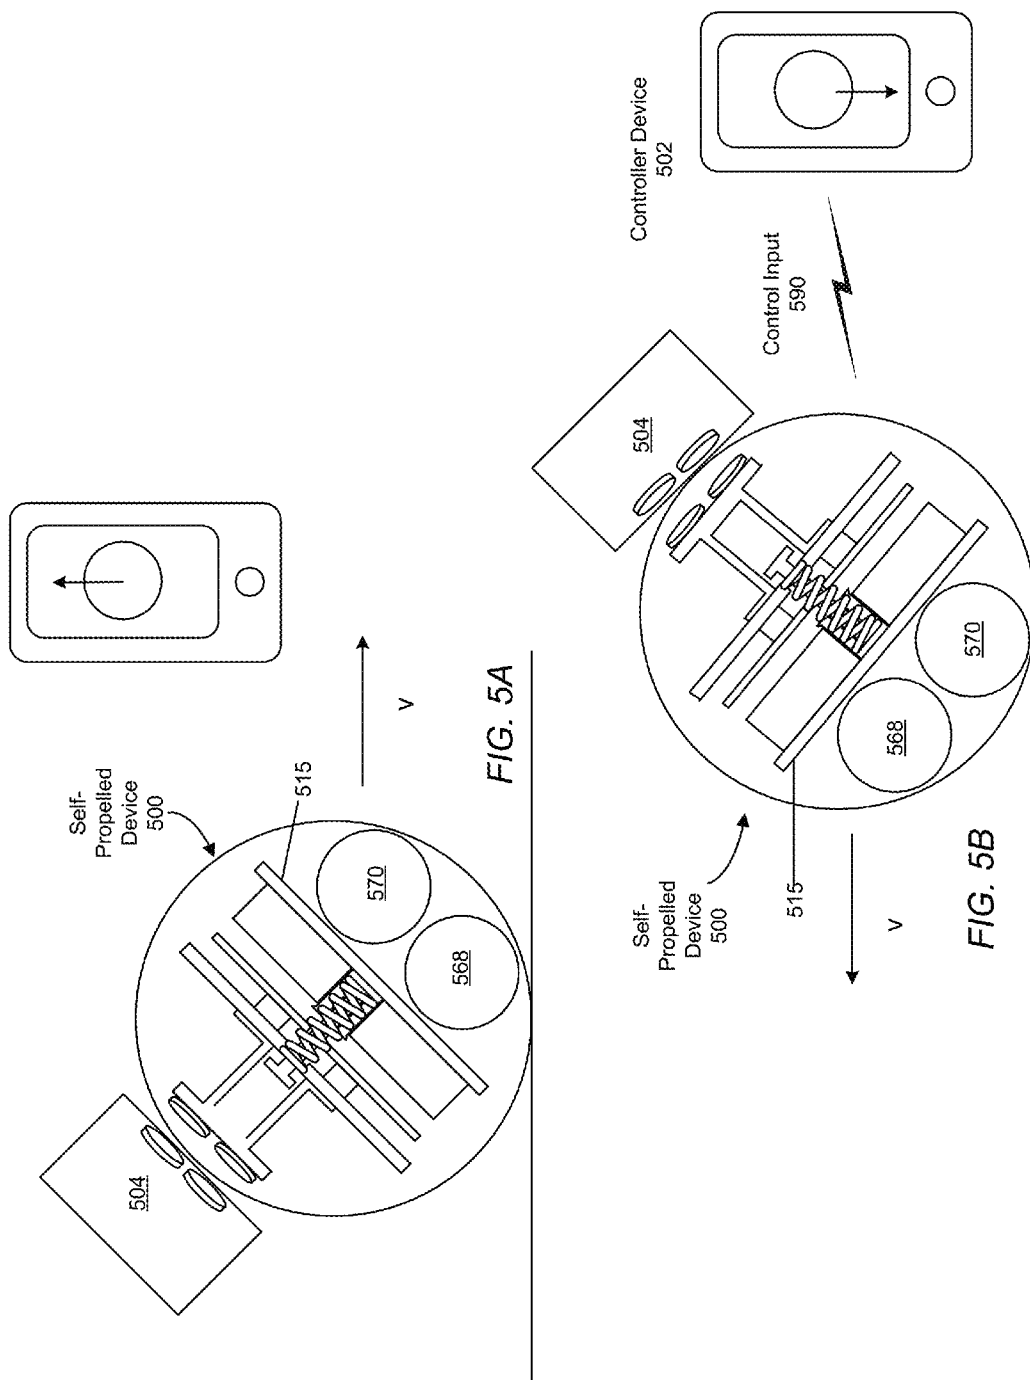
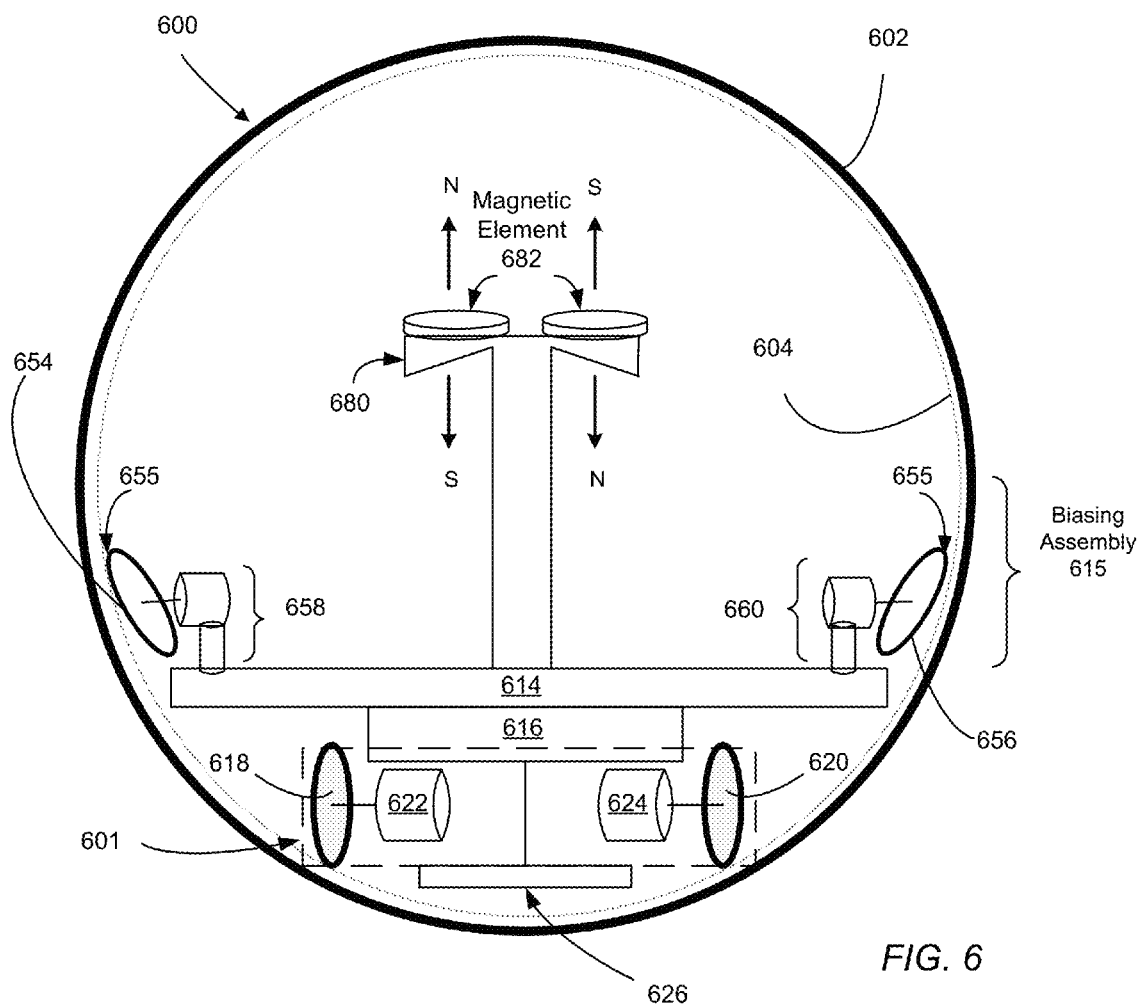


FIG. 4D





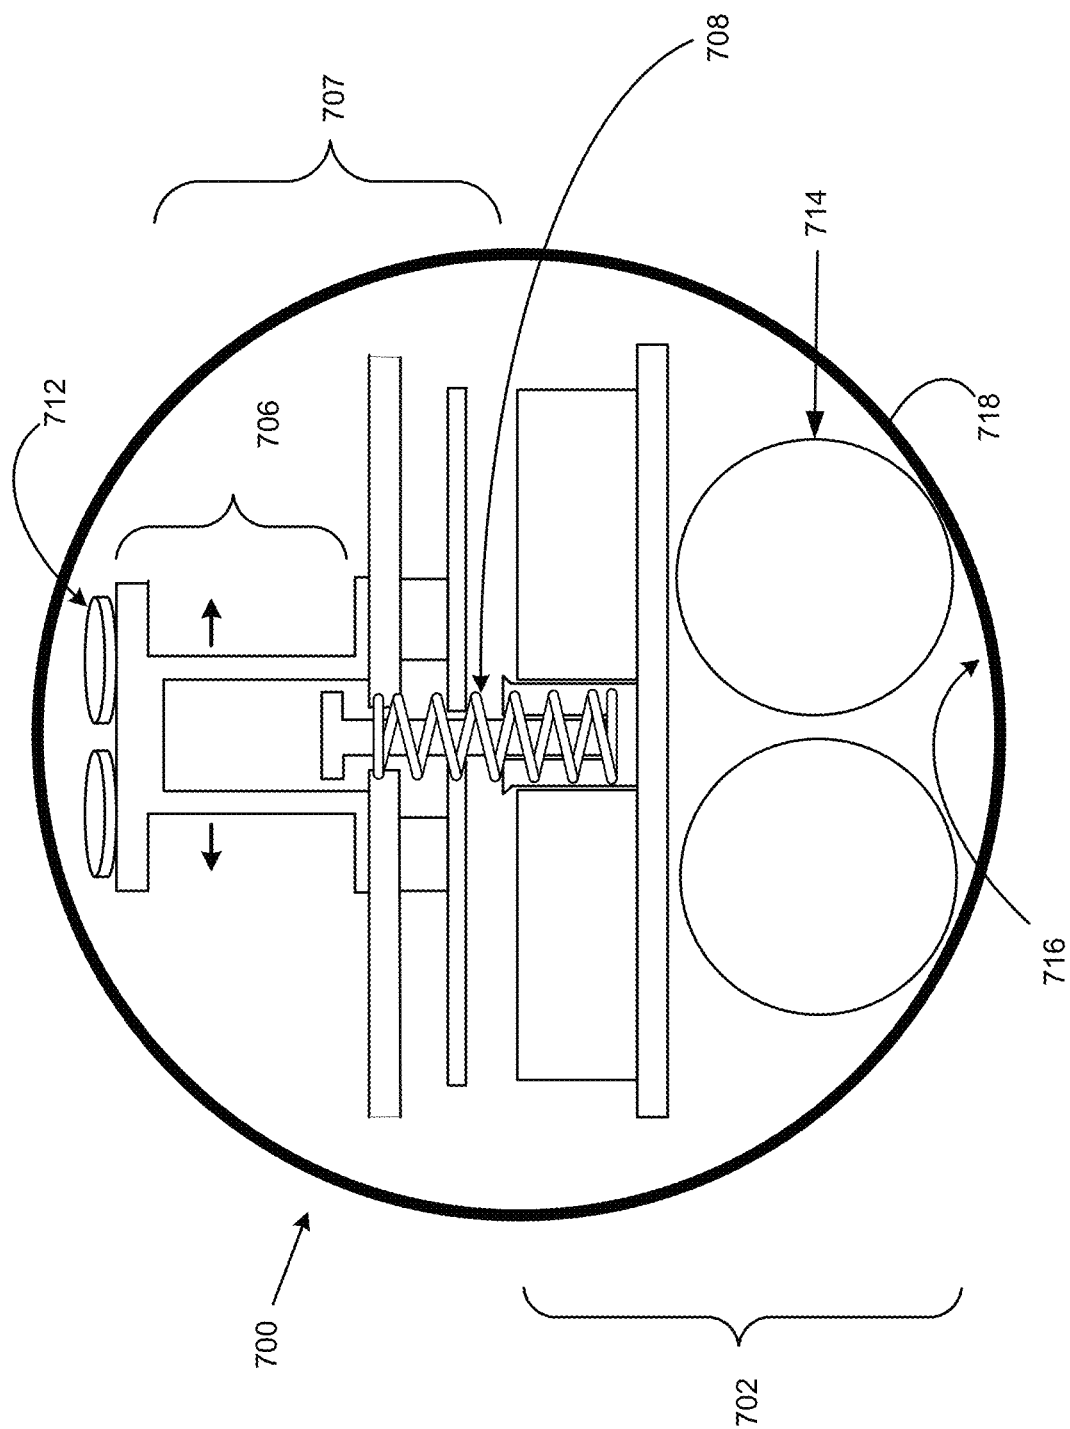


FIG. 7A

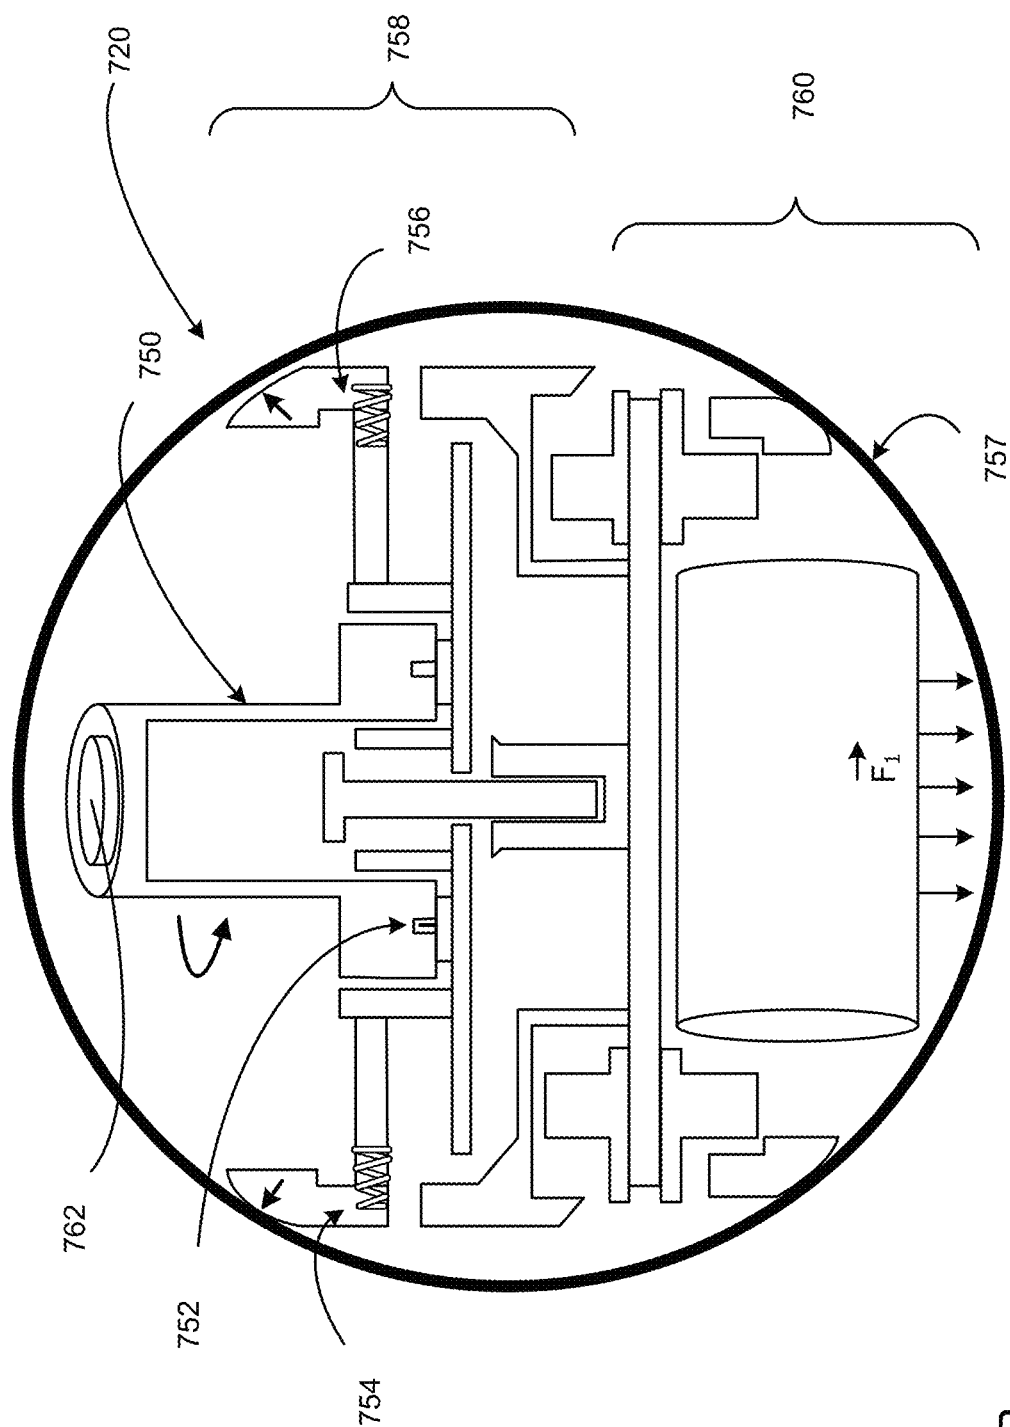


FIG. 7B

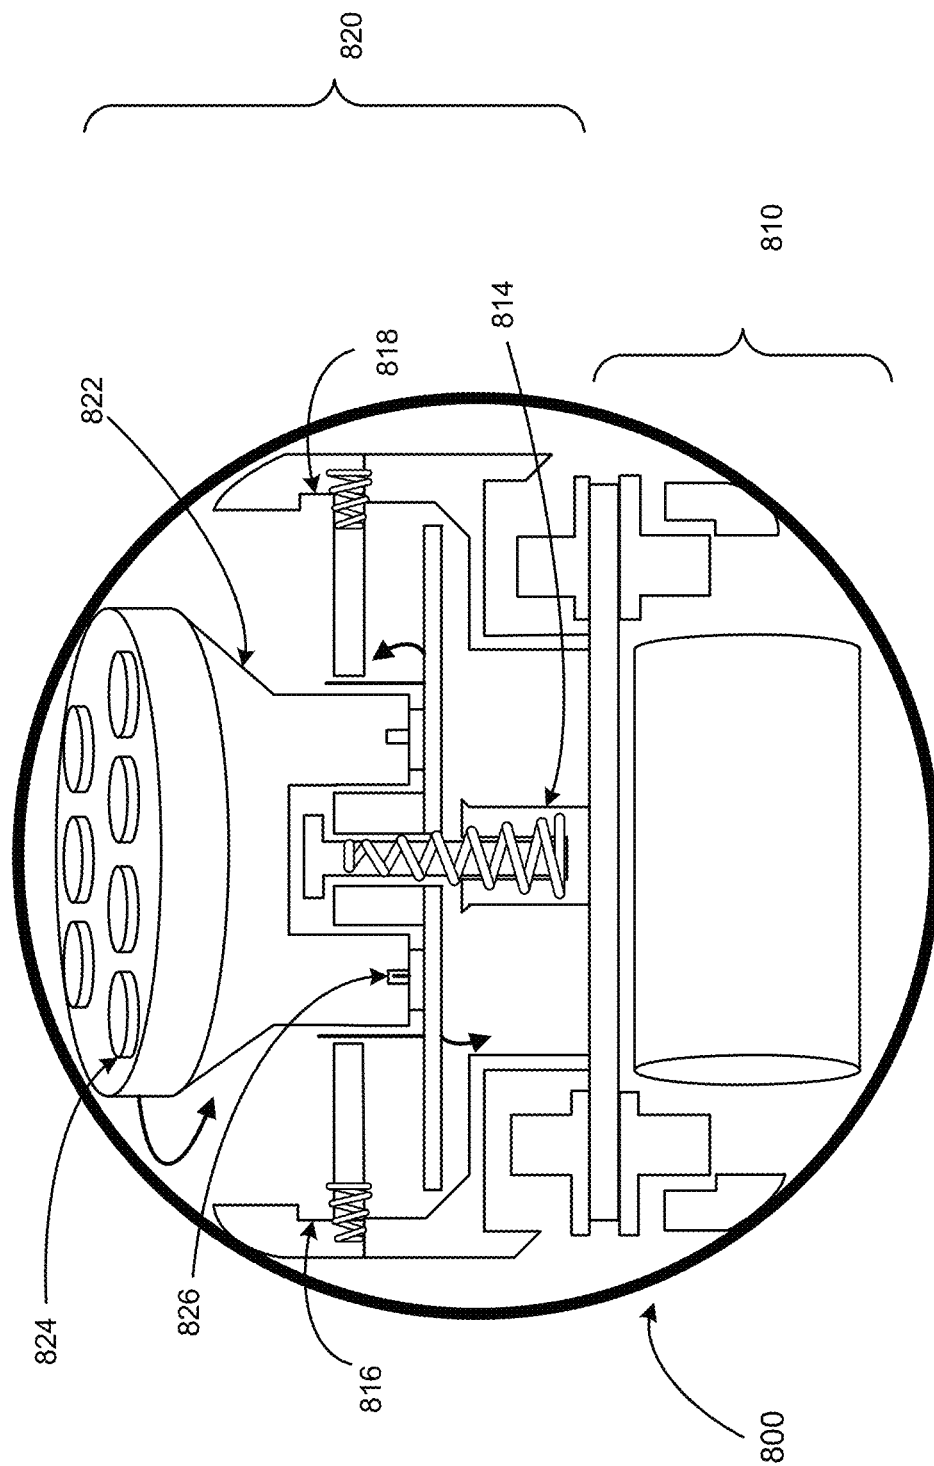
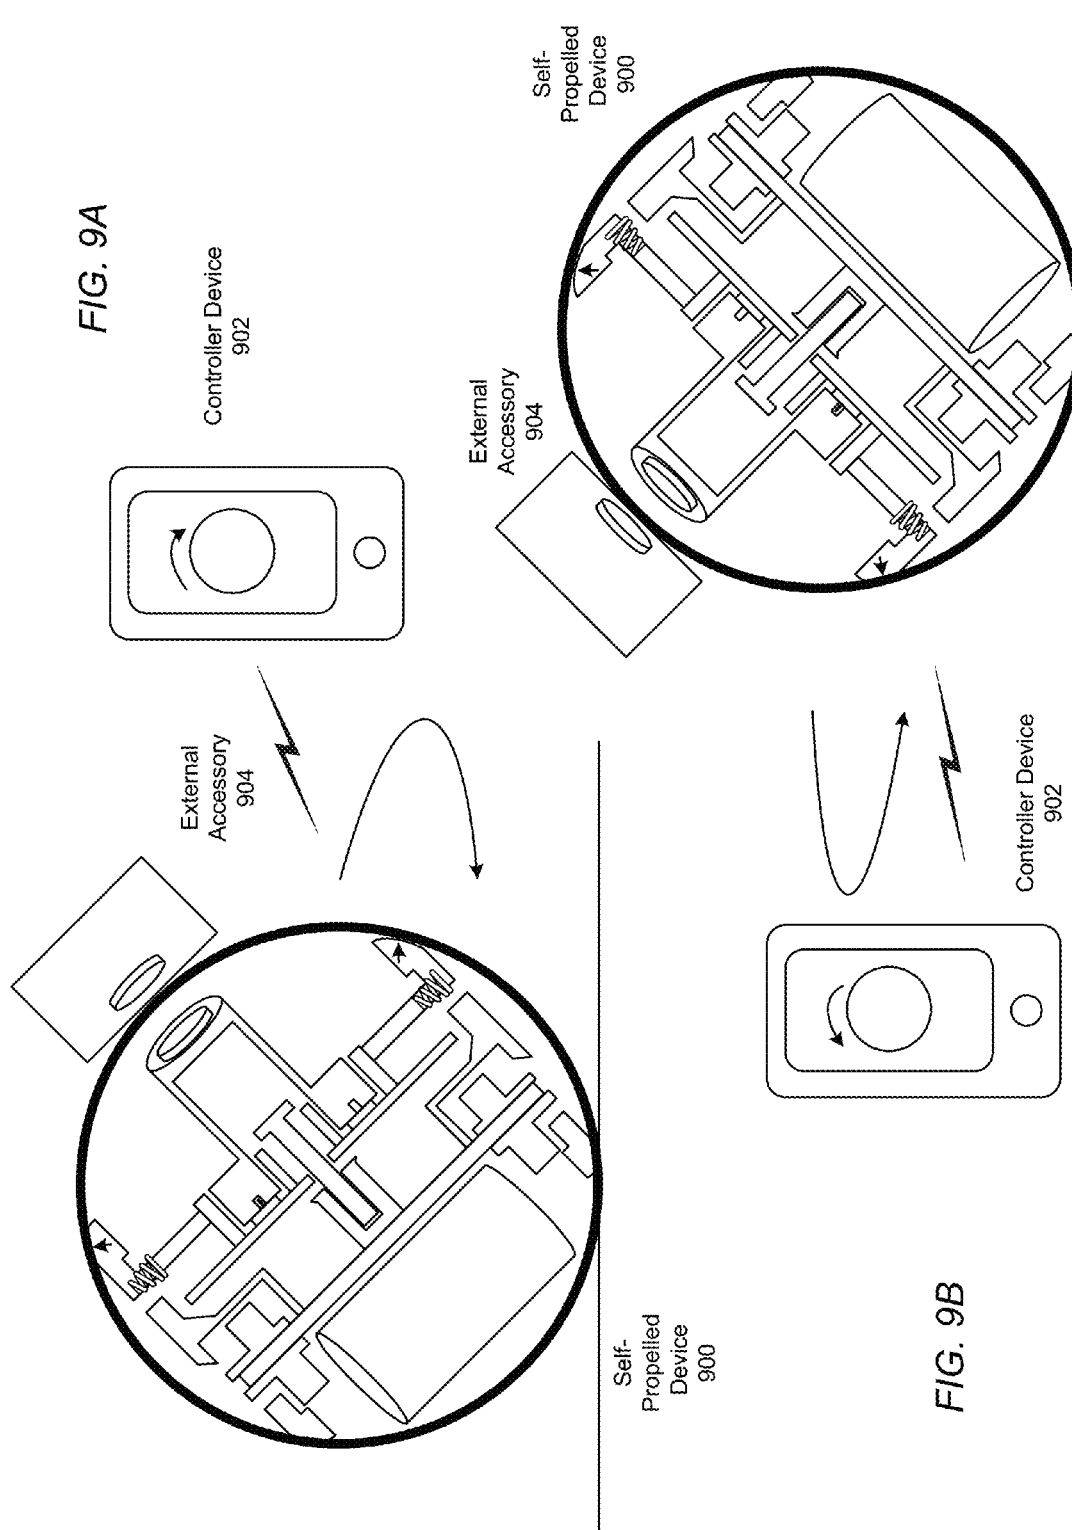


FIG. 8



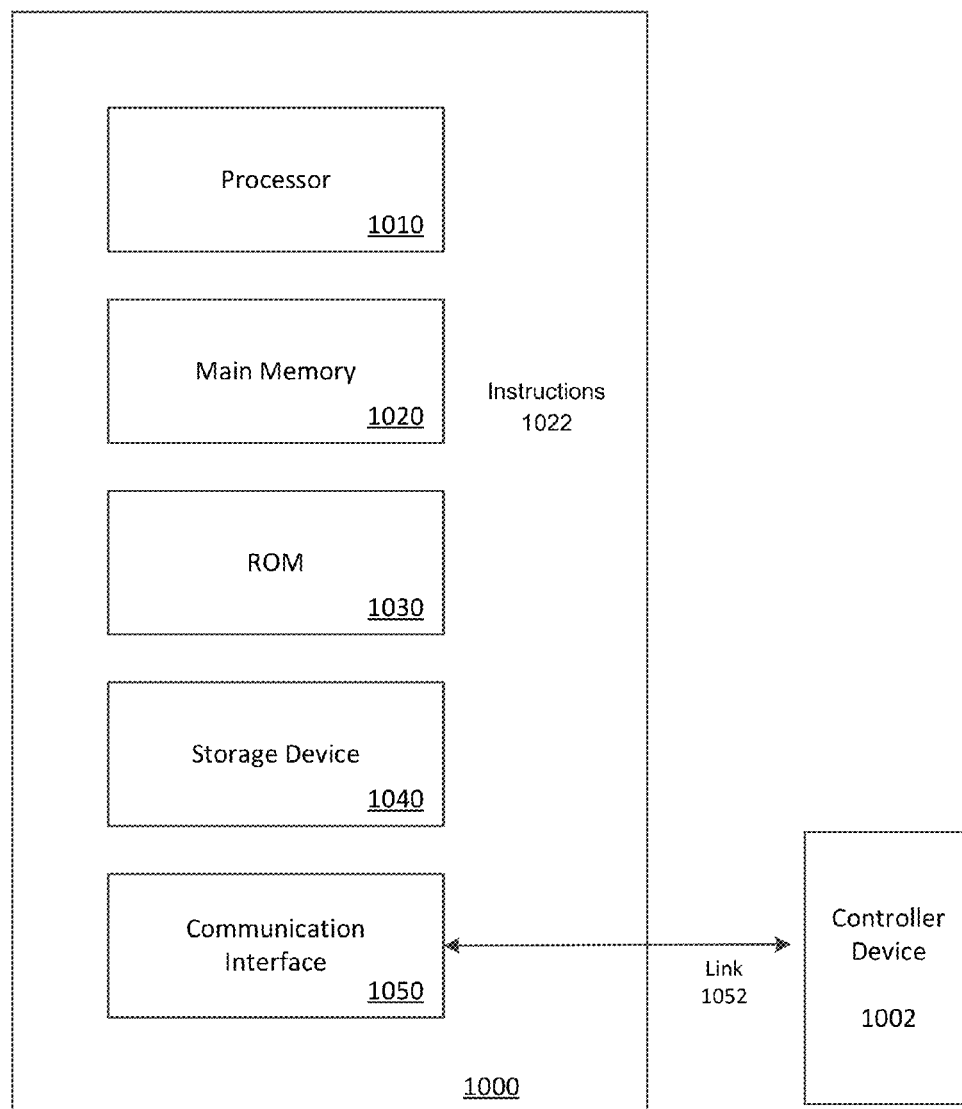


FIG. 10

1

SELF PROPELLED DEVICE WITH MAGNETIC COUPLING

RELATED APPLICATIONS

This application claims priority to U.S. Provisional Patent Application Ser. No. 62/149,441, entitled "SELF PROPELLED DEVICE WITH MAGNETIC COUPLING," filed Apr. 17, 2015; the aforementioned priority application being hereby incorporated by reference in its entirety.

This application is also a Continuation-in-part of U.S. patent application Ser. No. 14/459,235, entitled "MAGNETICALLY COUPLED ACCESSORY FOR A SELF-PROPELLED DEVICE", filed Aug. 13, 2014; which is a Continuation-in-part of U.S. patent application Ser. No. 14/035,841, entitled "SELF-PROPELLED DEVICE WITH ACTIVELY ENGAGED DRIVE SYSTEM," filed Sep. 24, 2013; which is a Continuation of U.S. patent application Ser. No. 13/342,853, entitled "SELF-PROPELLED DEVICE WITH ACTIVELY ENGAGED DRIVE SYSTEM," filed Jan. 3, 2012, now U.S. Pat. No. 8,571,781, issued Oct. 29, 2013; which claims priority under 35 U.S.C. §119(e) to (i) U.S. Provisional Patent Application Ser. No. 61/430,023, entitled "METHOD AND SYSTEM FOR CONTROLLING A ROBOTIC DEVICE," filed Jan. 5, 2011; (ii) U.S. Provisional Patent Application Ser. No. 61/430,083, entitled "METHOD AND SYSTEM FOR ESTABLISHING 2-WAY COMMUNICATION FOR CONTROLLING A ROBOTIC DEVICE," filed Jan. 5, 2011; and (iii) U.S. Provisional Patent Application Ser. No. 61/553,923, entitled "A SELF-PROPELLED DEVICE AND SYSTEM AND METHOD FOR CONTROLLING SAME," filed Oct. 31, 2011; all of the aforementioned priority applications being hereby incorporated by reference in their respective entirety.

BACKGROUND

Remote controlled devices have previously been operated using specialized remote controllers specific to a particular device. Accessories to remote controlled devices typically involve physical fastening means to connect the accessories to portions of a frame or housing.

BRIEF DESCRIPTION OF THE DRAWINGS

The disclosure herein is illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings and in which like reference numerals refer to similar elements, and in which:

FIG. 1 is an example block diagram illustrating a system to control operation of a self-propelled device;

FIG. 2A is a schematic depiction of a self-propelled device and a computing device, under an embodiment;

FIG. 2B depicts a system comprising computing devices and self-propelled devices, according to another embodiment;

FIG. 2C is a schematic that illustrates a system comprising a computing device and multiple self-propelled devices, under another embodiment.

FIG. 3A is a block diagram illustrating the components of a self-propelled device that is in the form of a robotic, spherical ball, in accordance with an embodiment;

FIG. 3B is a block diagram illustrating an exploded view of an example self-propelled device;

FIGS. 4A-4D illustrate an example of a spinning or rolling self-propelled device that includes components for magnetically coupling with an external accessory device, according to some embodiments;

2

FIG. 5A and FIG. 5B illustrate a self-propelled device in motion while magnetically coupled to an accessory device, according to one or more embodiments;

FIG. 6 illustrates an example of a spherical self-propelled device, and shows a schematic illustrating the components of the example spherical self-propelled device;

FIG. 7A is a cross-sectional side view of an example self-propelled device including an independent internal structure and a structure for magnetic coupling to an accessory device;

FIG. 7B is a cross-sectional front view of an example self-propelled device including a biasing assembly and a structure for magnetic coupling to an accessory device;

FIG. 8 is a cross-sectional view of an example self-propelled device including a magnetic array;

FIGS. 9A-9B illustrate example turn states of the self-propelled device under operative control by a controller device; and

FIG. 10 is an example block diagram that illustrates a computer system upon which examples described may be implemented.

DETAILED DESCRIPTION

A self-propelled device is provided that includes a spherical housing and an internal drive system including one or more motors coupled to one or more wheels engaged to an inner surface of the spherical housing. A biasing assembly, including a number of biasing elements to contact an inner surface of the spherical housing, is coupled to the internal drive system to force the wheels to continuously engage the inner surface to allow for power to the motors to be transferred to the inner surface of the spherical housing, causing the self-propelled device to roll and maneuver along a surface. The self-propelled device can rotate based on a combination of movement of its center of mass, independent power to the motors, and the force of the biasing elements against the inner surface. Magnetically interactive components or elements may be included within the spherical housing. The magnetically interactive components or elements can be comprised of ferrous metal or permanent magnets, such as neodymium magnets, to provide a magnetic field through the spherical housing to magnetically interact with an external accessory.

In some examples, the spherical housing of the self-propelled device is caused to roll and maneuver while the external accessory remains under magnetic interaction with the magnetically interactive components within the spherical housing, coupling the external accessory to the spherical housing. The accessory device can remain within a constant relative portion or area on the exterior surface of the spherical housing (e.g., a top portion) as the self-propelled device rolls.

The self-propelled device, the external accessory, or both can include any number of magnets (e.g., neodymium magnets) to produce a magnetic interaction sufficient to maintain the magnetic coupling. Such interaction may involve a magnetic attraction in which contact occurs between the external accessory and the outer surface of the spherical housing. In such examples, friction may be reduced by coating the outer surface of the spherical housing and/or a contact surface of the external accessory with a substantially frictionless material. The external accessory can include a contact portion composed of a slider bearing, wheel bearings, or one or more wheels that engage the exterior surface of the spherical housing.

Additionally or alternatively, the magnetic interaction may involve a repulsive force including a stability mechanism

(e.g., one or more further magnets) to create stable magnetic levitation between the external accessory and the spherical housing.

Throughout this disclosure, the term “substantially” may be used in varying context for purpose of expressly introducing a qualitative approximation to a statement. In many contexts, the term can be interpreted to mean at least 75% of a stated quantity, comparison, or measurement. In the context of an angular measurement, the term “substantially” means between zero degrees and less than 90 degrees of angular rotation relative to a referenced structure within the spherical housing when the self-propelled device is in motion. Accordingly, the term may be used in context as, for example, “substantially” stable, a “substantially” constant angle, “substantially” at a particular position on a rolling or stationary sphere, or “substantially” perpendicular with respect to an underlying surface on which the self-propelled device rolls. In such contexts, “substantially” can mean less than a 90 degree differential with respect to a vertical (or perpendicular) reference axis to the underlying surface, and typically less than 45 degrees, with respect to the vertical axis, while the self-propelled device is in a non-accelerated state. Thus, for example, as the self-propelled device is operated, the external accessory can remain within magnetic interaction with magnetically interactive elements within the spherical housing and residing on or within substantially vertically oriented components. As further used herein, “substantially” in the context of friction between the outer surface of the spherical housing and the contact surface of the external accessory device, means a below normal frictional relation between two typical smooth surfaces (e.g., polished metal or wood surfaces). Thus, a “substantially” frictionless material means a material designed or manufactured for reduced friction such as a TEFLON® or a DELRIN® coating.

One or more examples described herein provide that methods, techniques, and actions performed by a computing device are performed programmatically, or as a computer-implemented method. Programmatically, as used herein, means through the use of code or computer-executable instructions. These instructions can be stored in one or more memory resources of the computing device. A programmatically performed step may or may not be automatic.

One or more examples described herein can be implemented using programmatic modules or components of a system. A programmatic module or component can include a program, a sub-routine, a portion of a program, or a software component or a hardware component capable of performing one or more stated tasks or functions. As used herein, a module or component can exist on a hardware component independently of other modules or components. Alternatively, a module or component can be a shared element or process of other modules, programs or machines.

Some examples described herein can generally require the use of computing devices, including processing and memory resources. For example, one or more examples described herein can be implemented, in whole or in part, on computing devices such as digital cameras, digital camcorders, desktop computers, cellular or smart phones, personal digital assistants (PDAs), laptop computers, printers, digital picture frames, and tablet devices. Memory, processing, and network resources may all be used in connection with the establishment, use, or performance of any example described herein (including with the performance of any method or with the implementation of any system).

Furthermore, one or more examples described herein may be implemented through the use of instructions that are executable by one or more processors. These instructions

may be carried on a computer-readable medium. Machines shown or described with figures below provide examples of processing resources and computer-readable mediums on which instructions for implementing examples can be carried and/or executed. In particular, the numerous machines shown with examples include processor(s) and various forms of memory for holding data and instructions. Examples of computer-readable mediums include permanent memory storage devices, such as hard drives on personal computers or servers. Other examples of computer storage mediums include portable storage units, such as CD or DVD units, flash memory (such as carried on smart phones, multifunctional devices or tablets), and magnetic memory. Computers, terminals, network enabled devices (e.g., mobile devices, such as cell phones) are all examples of machines and devices that utilize processors, memory, and instructions stored on computer-readable mediums. Additionally, examples may be implemented in the form of computer-programs, or a non-transitory computer usable carrier medium capable of carrying such a program.

System Description

Referring now to the drawings, FIG. 1 is an example block diagram illustrating a system to control operation of a self-propelled device **100**. The self-propelled device **100** can be operated to move under control of another device, such as a computing device operated by a user. The self-propelled device **100** can be configured with resources that enable one or more of the following: (i) maintain self-awareness of orientation and/or position relative to an initial reference frame after the device initiates movement; (ii) process control input programmatically, so as to enable a diverse range of program-specific responses to different control inputs; (iii) enable another device to control its movement using software or programming logic that is communicative with programming logic on the self-propelled device; and/or (iv) generate an output response for its movement and state that it is software interpretable by the control device.

The self-propelled device **100** can include several interconnected subsystems and modules. A processor **114** can execute programmatic instructions from a program memory **104**. The instructions stored in the program memory **104** can be changed, for example to add features, correct flaws, or modify behavior. In some variations, the program memory **104** stores programming instructions that are communicative or otherwise operable with software executing on a linked controller device. The processor **114** is configured to execute different programs of programming instructions, in order to alter the manner in which the self-propelled device **100** interprets or otherwise responds to command input (“commands”) from different sources. As described herein, the self-propelled device **100** may have multiple modes of operation, including the self-propelled device **100** being controlled by a computing device providing commands, the self-propelled device **100** being a controller for another device, and/or the self-propelled device **100** being partially or wholly self-controlled.

In some examples, the self-propelled device **100** can share a computing platform with a computing device on which programming logic is shared, in order to: (i) enable the user to operate the computing device to generate multiple kinds of input, including simple directional input, command input, gesture input, motion or other sensory input, voice input or combinations thereof to operate the self-propelled device **100**; (ii) enable the self-propelled device **100** to interpret input received from the computing device as a command or

set of commands; and/or (iii) enable the self-propelled device **100** to communicate data regarding the self-propelled device's position, movement, and/or state in order to effect a state on the computing device (e.g., a display state to include content corresponding to a controller-user interface). In variations, the self-propelled device **100** can further provide a programmatic interface (e.g., on a display **118**) that facilitates additional programming logic and/or instructions to operate the self-propelled device **100**. The computing device can execute programming that is communicative with the programming logic on the self-propelled device **100**.

A wireless communication port **110**, in conjunction with a communication transducer **102**, serves to exchange data between the processor **114** and other external devices. The data exchanges, for example, provide communications, control, logical instructions, state information, and/or updates for the program memory **104**. The processor **114** can generate output corresponding to state and/or position information, communicated to the controller device via the wireless communication port **110**. The mobility of the self-propelled device **100** may make wired connections undesirable. Thus, the term "connection" may be understood to mean a logical connection, such as a wireless link (e.g., BLUETOOTH), made without a physical connection to self-propelled device **100**.

In variations, the wireless communication port **110** implements the BLUETOOTH communications protocol and the transducer **102** is an antenna suitable for transmission and reception of BLUETOOTH radio signals. Other wireless communication mediums and protocols may also be used in alternative implementations.

Sensors **112** can provide information about the surrounding environment and condition to the processor **114**. In some variations, the sensors **112** include inertial measurement devices, including a three-axis gyroscope, a three-axis accelerometer, and/or a three-axis magnetometer. According to some variations, the sensors **112** provide input to enable the processor **114** to maintain awareness of the device's orientation and/or position relative to an initial reference frame after the device initiates movement. In various examples, the sensors **112** include instruments for detecting light, temperature, humidity, and/or measuring chemical concentrations or radioactivity.

State/variable memory **106** stores information about the present state of the system, including, for example, position, orientation, rates of rotation and translation about each axis. The state/variable memory **106** also stores information corresponding to an initial reference frame of the device upon, for example, the device **100** being put in use (e.g., the device **100** being switched on), as well as position and orientation information once the device **100** is in use. In this way, some embodiments provide for the device **100** to utilize information of the state/variable memory **106** in order to maintain position and orientation information of the device **100** once the device **100** starts moving.

A clock **108** provides timing information to the processor **114**. In one example, the clock **108** provides a time-base for measuring intervals and rates of change. In similar examples, the clock **108** provides day, date, year, time, and alarm functions. The clock **108** can allow the self-propelled device **100** to provide an alarm or alert at pre-set times.

An expansion port **120** provides a connection for addition of accessories or devices. The expansion port **120** can provide for future expansion, as well as flexibility to add options or enhancements. For example, the expansion port **120** can be

used to add peripherals, sensors, processing hardware, storage, displays, or actuators to the basic self-propelled device **100**.

In variations, the expansion port **120** provides an interface capable of communicating with a suitably configured component using analog or digital signals. Thus, the expansion port **120** can provide electrical interfaces and protocols that are standard or well-known. Furthermore, the expansion port **120** implements an optical interface. Example interfaces appropriate for expansion port **120** include the Universal Serial Bus (USB), Inter-Integrated Circuit Bus (I2C), Serial Peripheral Interface (SPI), or ETHERNET.

A display **118** may be included to present information to outside devices or persons. The display **118** can present information in a variety of forms. In variations, display **118** can produce light in colors and patterns, sound, vibration, music, or combinations of sensory stimuli. In one embodiment, the display **118** operates in conjunction with actuators **126** to communicate information by physical movements of device **100**. For example, the device **100** can be made to emulate a human head nod or shake to communicate "yes" or "no."

In variations, the display **118** is an emitter of light, either in the visible or invisible range. Invisible light in the infrared or ultraviolet range may be useful, for example to send information invisible to human senses but available to specialized detectors. In some examples, the display **118** includes an array of Light Emitting Diodes (LEDs) emitting various light frequencies, arranged such that their relative intensity is variable and the light emitted is blended to form color mixtures.

In variations, the display **118** includes an LED array comprising several LEDs, each emitting a human-visible primary color. The processor **114** can vary the relative intensity of each of the LEDs to produce a wide range of colors. Primary colors of light are those in which a few colors can be blended in different amounts to produce a wide gamut of apparent colors. Many sets of primary colors are known, including for example red/green/blue, red/green/blue/white, and red/green/blue/amber. For example, red, green and blue LEDs together can comprise a usable set of three available primary-color devices comprising the display **118**. In other examples, other sets of primary colors and white LEDs can be used. The display **118** can further include an LED used to indicate a reference point on the device **100** for alignment.

Power **124** stores energy for operating the electronics and electromechanical components of the device **100**. In some examples, power **124** is a rechargeable battery. Furthermore, an inductive charge port **128** can allow for recharging power **124** without a wired electrical connection. In variations, the inductive charge port **128** can accept magnetic energy and convert it to electrical energy to recharge the batteries. The charge port **128** can provide a wireless communication interface with an external charging device.

A deep sleep sensor **122** can be included to place the self-propelled device **100** into a very low power or "deep sleep" mode where most of the electronic devices use no battery power. This may be useful for long-term storage or shipping.

In variations, the deep sleep sensor **122** is non-contact in that it senses through the housing of device **100** without a wired connection. The deep sleep sensor **122** may be a Hall Effect sensor mounted so that an external magnet can be applied at a pre-determined location on device **100** to activate the deep sleep mode.

Actuators **126** may be included to convert electrical energy into mechanical energy for various uses. A primary use of the actuators **126** is to propel and steer self-propelled device **100** over an underlying surface. Movement and steering actuators

are also referred to as a drive system or traction system. The drive system moves device **100** in rotation and translation, under control of the processor **114**. Examples of actuators **126** include, without limitation, wheels, motors, solenoids, propellers, paddle wheels, and pendulums.

The drive system actuators **126** can include two parallel wheels, each mounted to an axle connected to an independently variable-speed motor through a reduction gear system. Thus, the speeds of the two drive motors can be controlled by the processor **114**.

However, it should be appreciated that the actuators **126** can produce a variety of movements in addition to merely rotating and translating the self-propelled device **100**. Thus, in some variations, the actuators **126** cause the device **100** to execute communicative or emotionally evocative movements, including emulation of human gestures, for example, head nodding, shaking, trembling, spinning, or flipping. In some variations, the processor **114** coordinates the actuators **126** with the display **118**. For example, the processor **114** can provide signals to the actuators **126** and the display **118** to cause the device **100** to spin or tremble and simultaneously emit patterns of colored light. Thus, the device **100** can emit light and/or sound patterns synchronized with movements.

In further variations, the self-propelled device **100** can be used as a controller for other network-connected devices. The device **100** can contain sensors and wireless communication capability, and so it can perform a controller role for other devices. For example, the self-propelled device **100** can be held in the hand and used to sense gestures, movements, rotations, combination inputs, and the like.

In some implementations, self-propelled device **100** is wholly autonomous, meaning the movement of the device **100** is determined from resources that reside on the device **100**, either without or independent of input signals from another device acting as a controller. In other implementations, the self-propelled device **100** can operate under various levels of control provided by another device, such as provided by some examples described below with respect to FIGS. 2A-2C. Still further, the self-propelled device **100** can operate in either an autonomous mode, a partially autonomous mode, or a controlled mode.

FIG. 2A is a schematic depiction of a self-propelled device and a computing device, under an embodiment. More specifically, a self-propelled device **214** is controlled in its movement by programming logic and/or controls that can originate from a controller device **208**. The self-propelled device **214** is capable of movement under control of the computing device **208**, which can be operated by a user **202**. The computing device **208** can wirelessly communicate control data to the self-propelled device **214** using a standard or proprietary wireless communication protocol. In variations, the self-propelled device **214** may be at least partially self-controlled, utilizing sensors and internal programming logic to control the parameters of its movement (e.g., velocity, direction, etc.). Still further, the self-propelled device **214** can communicate data relating to the self-propelled device's position and/or movement parameters for the purpose of generating or alternating content on the computing device **208**. In additional variations, the self-propelled device **214** can control aspects of the computing device **208** by way of its movements and/or internal programming logic.

As described herein, the self-propelled device **214** may have multiple modes of operation, including the self-propelled device **214** being controlled by the computing device **208**, the self-propelled device **214** being a controller for another device (e.g., another self-propelled device or the

computing device **208**), and/or the self-propelled device **100** being partially or wholly autonomous.

In some examples, the self-propelled device **214** and the computing device **208** can share a computing platform on which programming logic is shared, in order to: (i) enable the user **202** to operate the computing device **208** to generate multiple kinds of input, including simple directional input, command input, gesture input, motion or other sensory input, voice input, or combinations thereof to operate the self-propelled device **214**; (ii) enable the self-propelled device **214** to interpret input received from the computing device **208** as a command or set of commands; and/or (iii) enable the self-propelled device **214** to communicate data regarding the self-propelled device's position, movement, and/or state in order to effect a state on the computing device **208** (e.g., a display state to include content corresponding to a controller-user interface). The self-propelled device **214** can further include a programmatic interface that facilitates additional programming logic and/or instructions to use the self-propelled device **214**. The computing device **208** can execute programming that is communicative with the programming logic on the self-propelled device **214**.

According to embodiments, the self-propelled device **214** includes an actuator or drive mechanism causing motion or directional movement. The self-propelled device **214** may be referred to by a number of related terms and phrases, including controlled device, robot, robotic device, remote device, autonomous device, and remote-controlled device. In some embodiments, the self-propelled device **214** can be structured to move and be controlled in various media. For example, the self-propelled device **214** can be configured for movement in media such as flat surfaces, sandy surfaces, or rocky surfaces.

The self-propelled device **214** may be implemented in various forms. As described with some examples below, the self-propelled device **214** may correspond to a spherical object that can roll and/or perform other movements, such as spinning. In other variations, the self-propelled device **214** can include a cylindrical housing which rotates while the self-propelled device **214** moves. The cylindrical housing can rotate directly on an underlying surface in order to move or translate in a given direction. Alternatively, the cylindrical housing can include external wheels and/or drive system components which move the cylindrical housing, with the cylindrical housing spinning by way of its momentum and free connection to the external drive system, or by way of the cylindrical housing's connection to wheels or other spinning components of the drive system. Still further, the self-propelled device **214** can include housings of other shapes in which the housing rolls or spins. Still further, in other variations, the self-propelled device **214** can include an external accessory that is magnetically coupled to magnetically interactive elements (e.g., metals or magnets) within the housing. The housing of the self-propelled device can include one or more structural elements which maintain a position of a magnetically interactive element within the housing. Still further, the device **214** can correspond to a radio-controlled aircraft, such as an airplane, helicopter, hovercraft, or balloon. In other variations, device **214** can correspond to a radio controlled watercraft, such as a boat or submarine. Numerous other variations may also be implemented, such as those in which the device **214** is a robot. In one embodiment, device **214** includes a sealed hollow envelope, roughly spherical in shape, capable of directional movement by action of actuators inside the enclosing envelope.

Continuing to refer to FIG. 2A, the self-propelled device **214** is configured to communicate with the computing device **208** using network communication links **210** and **212**. Link

210 transfers data from the computing device 208 to the self-propelled device 214. Link 212 transfers data from the self-propelled device 214 to the computing device 208. Links 210 and 212 are shown as separate unidirectional links for illustration. In some embodiments, a single bi-directional communication link performs communication in both directions. It should be appreciated that link 210 and link 212 are not necessarily identical in type, bandwidth, or capability. For example, communication link 210 from the computing device 208 to the self-propelled device 214 is often capable of a higher communication rate and bandwidth compared to link 212. In some situations, only one link 210 or 212 is established. In such an embodiment, communication is unidirectional.

The computing device 208 can correspond to any device comprising at least a processor and communication capability suitable for establishing at least uni-directional communications with the self-propelled device 214. Examples of such devices include, without limitation: mobile computing devices (e.g., multifunctional messaging/voice communication devices such as smart phones), tablet computers, portable communication devices, and personal computers. In one embodiment, the computing device 208 is an IPHONE available from APPLE COMPUTER, INC. of Cupertino, Calif. In another embodiment, the computing device 208 is an IPAD tablet computer, also from APPLE COMPUTER. In another embodiment, the computing device 208 is any of the handheld computing and communication appliances executing the ANDROID operating system from GOOGLE, INC.

In another embodiment, the computing device 208 is a personal computer, in either a laptop or desktop configuration. For example, the computing device 208 can be a multi-purpose computing platform running the MICROSOFT WINDOWS operating system, or the LINUX operating system, or the APPLE OS/X operating system, configured with an appropriate application program to communicate with the self-propelled device 214.

In variations, the computing device 208 can be a specialized device, dedicated for enabling the user 202 to control and interact with the self-propelled device 214.

In one embodiment, multiple types of computing device 208 can be used interchangeably to communicate with the self-propelled device 214. In one embodiment, the self-propelled device 214 is capable of communicating and/or being controlled by multiple devices (e.g., concurrently or one at a time). For example, the self-propelled device 214 can link with an IPHONE in one session and with an ANDROID device in a later session, without modification of the self-propelled device 214.

According to embodiments, the user 202 can interact with the self-propelled device 214 via the computing device 208, in order to control the self-propelled device 214 and/or to receive feedback or interaction on the computing device 208 from the self-propelled device 214. According to embodiments, the user 202 is enabled to specify input 204 through various mechanisms that are provided with the computing device 208. Examples of such inputs include text entry, voice commands, touching a sensing surface or screen, physical manipulations, gestures, taps, shaking, and combinations of the above.

The user 202 may interact with the computing device 208 in order to receive feedback 206. The feedback 206 may be generated on the computing device 208 in response to user input. As an alternative or addition, the feedback 206 may also be based on data communicated from the self-propelled device 214 to the computing device 208 regarding, for example, the self-propelled device's position or state. With-

out limitation, examples of feedback 206 include text display, graphical display, sound, music, tonal patterns, modulation of color or intensity of light, haptic, vibrational, or tactile stimulation. The feedback 206 may be combined with content that is generated on the computing device 208. For example, the computing device 208 may output content that is modified to reflect position or state information communicated from the self-propelled device 214.

In some embodiments, the computing device 208 and/or the self-propelled device 214 are configured such that user input 204 and feedback 206 maximize usability and accessibility for a user 202 who has limited sensing, thinking, perception, motor or other abilities. This allows users with handicaps or special needs to operate system 200 as described.

It should be appreciated that the configuration illustrated in the embodiment of FIG. 2A is only one of an almost unlimited number of possible configurations of networks including a self-propelled device with communication connections. Furthermore, while numerous embodiments described herein provide for a user to operate or otherwise directly interface with the computing device in order to control and/or interact with a self-propelled device, variations to embodiments described encompass enabling the user to directly control or interact with the self-propelled device 214 without use of an intermediary device, such as the computing device 208.

FIG. 2B depicts a system 218 comprising computing devices and self-propelled devices, according to another embodiment. In the example provided by FIG. 2B, system 218 includes two computing devices 220 and 228, four self-propelled devices 224, 232, 236, and 238, and communication links 222, 226, 230, 234, and 239. The communication of computing device 220 with self-propelled device 224 using link 222 is similar to the embodiment depicted in network 200 of FIG. 2A; however, embodiments such as those shown enable additional communication to be established between two computing devices 220 and 228, via network link 226.

According to an embodiment such as provided with system 218, the computing devices 220, 228 may optionally control more than one self-propelled device. Furthermore, each self-propelled device 224, 232, 236, 238 may be controlled by more than one computing device 220, 228. For example, embodiments provide that computing device 228 can establish multiple communications links, including with self-propelled devices 232 and 236, and computing device 220.

In variations, the computing devices 220, 228 can also communicate with one or more self-propelled devices using a network such as the Internet, or a local wireless network (e.g., a home network). For example, the computing device 228 is shown to have a communications link 239, which can connect the computing device to an Internet server, a web site, or to another computing device at a remote location. In some embodiments, the computing device 228 can serve as an intermediary between the network source and a self-propelled device. For example, the computing device 228 may access programming from the Internet and communicate that programming to one of the self-propelled devices.

As an alternative or variation, the computing device 228 can enable a network user to control the computing device 228 in controlling one or more of the self-propelled devices 232, 236, etc. Still further, the computing device 228 can access the network source in order to receive programmatically triggered commands, such as a command initiated from a network service that causes one or more of the self-propelled devices to update or synchronize using the computing device 228. For example, the self-propelled device 232 may include image capturing resources, and a network source may trigger the computing device 228 to access the images from

11

the self-propelled device, and/or to communicate those images to the network source over the Internet.

In variations, such remote network functionality may alternatively be communicated directly from a network source to the self-propelled devices **224**, **232**, **236**. Thus, computing devices **220**, **228** may be optional. Alternatively, computing devices **220**, **228** may be separated from the self-propelled devices **224**, **232**, **236** by a network such as the Internet. Thus, computing devices **220**, **228** can alternatively be the network source that remotely controls and/or communicates with the self-propelled devices.

It should be noted that the data communication links **210**, **212**, **222**, **226**, **230**, **234**, **239**, **242**, **246**, **248**, and **252** in FIGS. **2A**, **2B**, and **2C** are depicted as short and direct for purposes of illustration. However, actual links may be much more varied and complex. For example, link **226** connecting two computing devices **220** and **228** may be a low-power wireless link, if devices **220** and **228** are in close proximity. However, computing devices **220** and **228** may be far apart (e.g., separated by miles or geography), so long as suitable network communication can be established.

Thus, link **226** and all of the links **222**, **230**, **234**, and **239** can employ a variety of network technologies, including the Internet, World Wide Web, wireless links, wireless radio-frequency communications utilizing network protocol, optical links, or any available network communication technology. The final connection to self-propelled devices **224**, **232**, **236**, and **238** is preferably wireless so connecting wires do not restrict mobility.

In one embodiment, the communication links **222**, **226**, **230**, and **234** are based on the wireless communication standard for data exchange known as BLUETOOTH. BLUETOOTH is widely available and provides a flexible communication framework for establishing data networks using short-wavelength radio transceivers and data encoding. BLUETOOTH incorporates security features to protect the data sent on the links from unauthorized observers or interference. Alternative wireless communication media may also be employed, such as wireless USB, Wi-Fi, or proprietary wireless communications. In variations, one or more of the communication links to **222**, **226**, **230**, and **234** can utilize short-range radiofrequency (RF) communication, and/or line-of-sight communications.

In various other embodiments, the communication links are based on other wireless communication systems. Various radio frequency data communication systems are available, including for example those known as WI-FI, IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, or IEEE 802.11n. Other radio frequency data links are formed using cellular telephone services or serial communication protocols using radio modems. In other embodiments, optical communication links are employed, including modulating properties of light and LASER beams.

Any suitable communication technology can be used to form the network links, whether presently known or available in the future. The features described herein are not dependent on any particular networking technology or standard.

In some embodiments, the communications established amongst the devices, such as amongst computing devices **220**, **228** and/or self-propelled devices **224**, **232**, **236**, can be temporary, flexible and reconfigurable. A resulting network of such devices can be considered an "ad-hoc" network, or alternatively a "piconet," or "personal area network." In this respect, some implementations provide that the computing devices **220**, **228** and the self-propelled devices **224**, **232**, **236** can be considered nodes of the network, such as an ad-hoc network. In such configurations, network components, topol-

12

ogy, and communications paths are flexible and can be readily adjusted to accommodate addition or removal of devices, changing communication requirements or channel interference. For example, the self-propelled device **238** in FIG. **2B** is shown with no present network connection. However, the self-propelled device **238** has connected to the system **218** in the past and received instructions to enable it to operate without a persistent network link.

FIG. **2C** is a schematic that illustrates a system **268** comprising a computing device and multiple self-propelled devices, under another embodiment. A computing device **240** is operable to communicate with one or more self-propelled devices **244**, **250**, **254**. The computing device **240** may communicate commands or other control data, and receive feedback similar to embodiments described above. The self-propelled devices **244**, **250**, **254** are configured to communicate and/or be controlled by the computing device **240**. Additionally, the self-propelled devices **244**, **250**, **254** are configured to communicate and/or control one another.

In the example shown by FIG. **2C**, the computing device **240** communicates with self-propelled device **244** using communications link **242**. Self-propelled device **244** communicates with self-propelled device **250** using link **246** and with self-propelled device **254** using link **248**. Self-propelled devices **250** and **254** communicate using link **252**. The computing device **250** can send data to self-propelled devices **250** or **254** using device **244** as a relay. Alternatively, the computing device **240** can communicate with the other self-propelled devices **250**, **254** directly.

The system **268** may include various configurations. For example, a user may operate computing device **240** to control self-propelled device **244**. Movement of the self-propelled device **244** may be communicated both to the computing device **240** and to one or more of the other self-propelled devices **250**, **254**. Each of the self-propelled devices may be preprogrammed to react in a specific manner based on state or position information communicated from another one of the self-propelled devices. For example, self-propelled devices **244**, **250** may each be operated in a repel mode, so that the movement of self-propelled device **244** (as controlled from computing device **240**) results in a repel motion by the self-propelled device **250**. In other variations, self-propelled devices **244**, **250**, **254** may be preprogrammed to maintain a specific distance apart from one another, so that movement by one device automatically causes movement by the other two devices. Still further, the devices **244**, **250**, **254** may be configured so as to perform a variety of activities, such as, for example, (i) one self-propelled device automatically moving when another approaches a threshold distance; (ii) one self-propelled device programmatically moving to bump another self-propelled device; (iii) the self-propelled devices automatically moving in tandem based on input received by each of the self-propelled devices from the other self-propelled devices or from the computing device **240**, and/or variations thereof.

The various systems **200**, **218**, **238** are illustrative of embodiments provided herein. With any of the systems described, variations include the addition of more or fewer computing devices, and/or more or fewer self-propelled devices. As described with some variations, additional sources or nodes can be provided from a remote network source. Additionally, in some operational environments, the presence of the computing device is optional. For example, the self-propelled devices can be partially or completely autonomous, using programming logic to function.

Self-Propelled Device Examples

FIG. **3A** is a block diagram illustrating the components of a self-propelled device **300** that is in the form of a robotic,

13

spherical ball, in accordance with an embodiment. In one embodiment, the self-propelled device 300 is of a size and weight allowing it to be easily grasped, lifted, and carried in an adult human hand.

As shown, the self-propelled device 300 includes a spherical housing 302 with an outer surface that makes contact with an external surface as the device 300 rolls. In addition, the self-propelled device 300 includes an inner surface 304 of the housing 302. Additionally, the self-propelled device 300 includes several mechanical and electronic components enclosed by the housing 302.

In the described embodiment, the housing 302 is composed of a material that transmits signals used for wireless communication, yet is impervious to moisture and dirt. The housing material can be durable, washable, and/or shatter resistant. The housing 302 may also be structured to enable transmission of light and is textured to diffuse the light.

In one embodiment, the housing 302 is made of sealed polycarbonate plastic. In one embodiment, the housing 302 or the inner surface 304 is textured to diffuse light. In one embodiment, the housing 302 comprises two hemispherical shells with an associated attachment mechanism, such that the housing 302 can be opened to allow access to the internal electronic and mechanical components.

Several electronic and mechanical components are located inside the housing 302 for enabling processing, wireless communication, propulsion, and other functions. In an example, the components include a drive system 301 to enable the device 300 to propel itself. The drive system 301 can be coupled to processing resources and other control mechanisms, as described with other embodiments. Referring again to FIG. 3, a carrier 314 serves as the attachment point and support for the internal components of the self-propelled device 300. The components of the self-propelled device 300 are not rigidly attached to the housing 302. Instead, the drive system 301 is in frictional contact with the inner surface 304 at selected points, and is movable within the housing 302 by the action of actuators of the drive system 301.

The carrier 314 is in mechanical and electrical contact with energy storage 316. Energy storage 316 provides a reservoir of energy to power the device 300 and electronics and is replenished through inductive charge port 326. Energy storage 316, in one embodiment, is a rechargeable battery. In one embodiment, the energy storage 316 is a battery, such as one composed of lithium-polymer cells. In other embodiments, the energy storage 316 can be other types of rechargeable batteries.

The carrier 314 can provide the mounting location for most of the internal components, including printed circuit boards for electronic assemblies, sensor arrays, antennas, and connectors, as well as providing a mechanical attachment point for internal components.

In one embodiment, the drive system 301 includes motors 322, 324 and wheels 318, 320. The motors 322 and 324 connect to the wheels 318 and 320, respectively, each through an associated shaft, axle, and gear drive (not shown). The perimeter of the wheels 318 and 320 are two locations where the drive system 301 is in mechanical contact with the inner surface 304. The locations where the wheels 318 and 320 contact the inner surface 304 may be an essential part of the drive mechanism of the self-propelled device 300, and so the wheels 318 and 320 may be coated or covered with a material to increase friction and reduce slippage. For example, the wheels 318 and 320 may be covered with silicone rubber tires.

In some embodiments, a biasing mechanism is provided to actively force the wheels 318 and 320 against the inner surface 304. In an example, a spring 312 and a spring end 310 can

14

comprise the biasing mechanism. More specifically, the spring 312 and the spring end 310 are positioned to contact the inner surface 304 at a point diametrically opposed to the wheels 318 and 320. The spring 312 and the spring end 310 provide additional contact force to reduce slippage of the wheels 318 and 320, particularly in situations where the drive system 301 is not positioned with the wheels 318 and 320 at the bottom and where gravity does not provide adequate force to prevent the drive wheels 318 and 320 from slipping. The spring 312 is selected to provide a force pushing the wheels 318 and 320 and the spring end 310 evenly against the inner surface 304.

The spring end 310 can be designed to provide near-frictionless contact with the inner surface 304. In one embodiment, the spring end 310 comprises a rounded surface configured to mirror a low-friction contact region at all of its contact points with the inner surface 304. Additional mechanisms of providing near-frictionless contact may be provided. In another implementation, the rounded surface may include one or more bearings to further reduce friction at the contact point where end 310 moves along inner surface 304.

FIG. 3B is a block diagram illustrating an exploded view of an example of a cylindrical self-propelled device 350. In an example of FIG. 3B, a drive system 305 includes a left motor 352 and a right motor 354 with respective axles, one or more power units 370, a carrier 384, a circuit board 366 with any number of electronic components, and a receiver 368 which can be configured or included as any variety of wireless communication standards and/or technologies.

Referring to FIG. 3B, the above features are included within a body 364 of the self-propelled device 350. Furthermore, any combination of the above features can be configured to be rigid to the body 364. For example, the carrier 384 can be mounted or otherwise attached to an inner portion of the body 364. Alternatively, any number of interior components of the self-propelled device 350 can be coupled to the inner portion of the body 364. Accordingly, due to the interior components being rigid to the body 364, the body 364 can rotate in conjunction with the rotational pitch of the drive system 305 when the self-propelled device 350 is being maneuvered.

The body 364 is substantially cylindrical in shape and can include any number of designs and features. For example, the body can be at least partially transparent such that light from an internal light emitting component disposed within the body is apparent from outside of the device 350. The internal light emitting component can be any type of illuminating element, such as one or more light-emitting diodes (LEDs) or one or more LED arrays. The illuminating element can be affixed to the carrier 384, or any other interior component of the self-propelled device 350. As an addition or alternative, the body 364 can be comprised of sealed polycarbonate plastic or other composite that can be textured to diffuse light from the internal illuminating element.

Furthermore, the body 364 may be composed of a material that allows for transmission of signals used for wireless communication. Still further, an outer surface of the body 364 can be comprised of a material that is substantially impervious to moisture and every day wear and tear. The body 364 can be detachable from the self-propelled device 350 to allow for access to the interior components, and may further be durable, washable, and/or shatter resistant.

As an addition or alternative, the body 364 can include fastening or attachment points to allow for removable accessories to be attached to the exterior of the body 364. As

15

discussed in further detail below, these accessories may include, for example, an attachable head lamp or a trailer attachment.

As shown in FIG. 3B for illustrative purposes, the gear 360 for a particular wheel 358 can be molded or formed at least partially within an interior portion of a wheel, such as illustrated by wheel 358. Alternatively, the gear 360 can be included as a portion of a power train in which the motor 354 is coupled to an axle 362 and gear 360 combination. Accordingly, the axle 362 and gear 360 combination may then be fitted to the wheel 358. Alternatively, an axle and gear combination can be formed at least partially within an interior portion of a wheel.

Still further, a wheel hub 386 can be (i) formed at least partially within an outer portion of a respective wheel (not shown), (ii) formed in combination with a gear within an inner radius of a wheel (also not shown), or (iii) part of the power train attached to the gear 360 and axle 362. In the latter example, the wheel hub 386 can be a part of or coupled to the axle 362, and can further be configured to protrude from the outer portion of the wheel 358. The self-propelled device 350 can further incorporate removable hub covers 372, 374 that can be readily attached and detached from the wheel hubs 386. The hub covers 372, 374 may come in a variety of different colors and/or styles accordingly to a user's preference. Alternatively, the hub covers 372, 374 can be affixed semi-permanently to the wheel hubs 386. The hub covers 372, 374 may be made from a hard or soft plastic, plastic/rubber composite or compound, metal, or any other suitable material.

The wheels 356, 358 can allow for wheel coverings 376, 378 (e.g., tires) to be fitted over them. The wheel coverings 376, 378 can be removable and be formed of a soft rubber compound. However, the wheel coverings 376, 378 are not limited to soft rubber, and may be made of any compound. The wheel coverings 376, 378 may include any number of tread patterns for specialized or simply stylistic purposes. The wheel coverings 376, 378 can also come in a variety of different styles and/or colors according to a user's preference. In variations, the wheels 356, 358 have the same or substantially the same height as the body 364, and the wheel coverings 376, 378 can allow for a slight height advantage of the wheel and tire combination with respect to the body. Alternatively, the wheels 356, 358 can be significantly larger in height than the body 364.

Self-Propelled Device with Magnetic Coupling

FIGS. 4A-4D illustrate an example of a spinning or rolling self-propelled device that includes components for magnetically coupling with an external accessory device, according to some embodiments. In an example of FIG. 4A, a self-propelled device 400 is depicted as being in motion, while magnetically coupled to an external accessory device 430. FIG. 4B illustrates a top view of the self-propelled device 400, depicting a magnetic element 405 for creating a magnetic coupling. Likewise, FIG. 4C illustrates a top view of the external accessory device, depicting a complementary magnetic element 435 for coupling with the magnetic element 405 of the self-propelled device 400.

In an example of FIGS. 4A-4D, the self-propelled device 400 is structured in accordance with an implementation such as described with an example of FIG. 3A (e.g., self-propelled device 300), or with an example of FIG. 3B (e.g., self-propelled device 350). Accordingly, in an example of FIGS. 4A-4D, self-propelled device 400 includes a spherical housing 410 which rolls on an underlying surface 402 using an

16

internal drive system. In variations, the housing 410 of the self-propelled device 400 can have an alternative rounded shape, such as an elliptical or cylindrical (e.g., with reference to FIG. 3B) shape, so that the housing spins above or on the underlying surface 402.

According to one aspect, the self-propelled device 400 can include magnetic element 405 formed from a magnetic material, and an internal support structure 425 to support the magnetic element 405 in a desired orientation and position with respect to the underlying surface 402. By way of example, the support structure 425 can be implemented as part of a biasing mechanism, and the magnetic element 405 can be provided on a tip or spring end of the biasing mechanism. The magnetic element 405 can correspond to a magnet, or to any material (e.g., ferrous metals etc.) which is able to magnetically interact and couple with complementary magnets provided on the external accessory device 430. A board structure 420 (e.g., printed circuit board) can provide logic and hardware for controlling the drive system of the self-propelled device 400. In one implementation, the board structure 420 and the support structure 425 are provided as part of a platform which maintains a substantially constant angular position with rotation (W) of the housing 410 on the underlying surface 402.

The accessory device 430 can include a complementary magnetic element 435 on or near a bottom region which makes contact with the spherical housing 410. In variations, the accessory device 430 can include a variety of shapes and orientations, depending on the implementation or purpose of the combined device. For example, in an implementation of FIGS. 4A-4C, the accessory device 430 includes a cylindrical or rectangular "hat" shape for the spherical housing 410. In other variations, the accessory device 430 can have a sphere or ball shape. In many applications, the self-propelled device 400 operates as a toy or device for amusement, and the accessory device 430 is selectively shaped or structured to imitate human characteristics, or to provide other enhancements for furthering the amusement and appreciation of the combined device.

In one implementation, the magnetic elements 405, 435 of each of the self-propelled device 400 and the accessory device 430 are magnets oriented such that their opposing poles are directed towards each other to enable magnetic attraction. In variations, the magnetic elements 405, 435 of the self-propelled device 400 or the accessory device 430 include magnetically interactive materials, such as ferrous metals.

In various examples, an operational or use environment of the self-propelled device 400 can include events or conditions which disrupt the motion of the self-propelled device 400, such as (i) variations in the underlying surfaces (e.g., transition from smooth flooring to carpet flooring), (ii) collisions (e.g., with walls or other self-propelled devices), and (iii) relatively sharp velocity and acceleration of the self-propelled device 400, due to the self-propelled device 400 spinning or turning in any one of a variety of directions. Given the operational and use environment of the self-propelled device 400, the magnetic elements 405, 435 can maintain a strong, stable, and resilient magnetic coupling between the self-propelled device 400 and the accessory device 430.

Accordingly, in some embodiments, the quantity and/or distribution of magnetic elements (or magnetic material) within the spherical housing 410 can be varied to increase stability and/or resiliency of the magnetic coupling. For example, while an example of FIG. 4A provides for the magnetic element 405 to be positioned substantially in a polar region 412 (relative to the underlying surface 402), in varia-

17

tions, the magnetic element **405** can be replaced or augmented with multiple discrete magnetic elements that are positioned to promote strength, stability, or resiliency in the magnetic coupling. For example, discrete magnetic elements can be positioned equidistantly (or otherwise) from the polar region **412**, such as along a latitudinal plane **411** between the equator **408** and the polar region **412**. The accessory device **430** can include one or more complementary magnetic elements **435** to enable the desired magnetic coupling.

Still further, a coupling surface of the accessory device **430** can include contours and features to reduce friction, at least when the self-propelled device **400** is in motion. The presence of friction can, for example, cause the spherical housing **410** and accessory device **430** to magnetically detach or destabilize the coupling between the two devices. To reduce friction, a bottom surface **432** of the accessory device **430** can be rounded, and an exterior surface of each of the spherical housing **410** and the accessory device **430** can be maintained relatively smooth. Additionally, one or both of the exterior surface **417** of the spherical housing **410** and the bottom surface **432** of the accessory device **430** can be formed from a material that reduces friction with other surfaces.

The accessory device **430** may exhibit a variety of differing shapes in a variety of different sizes. For example, referring to FIG. **4D**, the accessory device **430** may be dome-shaped or hemispherical. The accessory device **430** may further be shaped as a disc, a cuboid, a cylinder, or any number of other irregular shapes. Regardless of the shape or size, the accessory device **430** can include a number of magnets **435** to remain under magnetic interaction with the magnetic element **405** of the self-propelled device **400**. Furthermore, the accessory device **430** may be interchangeable with various other accessory devices of differing shapes and sizes.

FIG. **5A** and FIG. **5B** illustrate a self-propelled device in motion while magnetically coupled to an accessory device, according to one or more embodiments. When the self-propelled device **500** moves, an external accessory device **504** can remain magnetically coupled to the self-propelled device **500** at a substantially constant position on top of the self-propelled device **500**. As such, while the self-propelled device **500** is being maneuvered, a support platform or structure **515** (e.g., such as one that provides the biasing mechanism **615** of FIG. **6** as described in detail below) may have a variable tilt angle (polar angle (θ) relative to the plane of motion) that does not typically exceed 45 degrees when an extreme disruptive event or condition occurs. However, during continuous and stable maneuvering of the self-propelled device **500**, the tilt of the support platform or structure **515** may be minimal, such as within 10 degrees about the horizontal. Furthermore, during maneuvering, the azimuth (ϕ) can vary at any angle depending on independent power transferred from motors or wheels or another drive mechanism of the self-propelled device.

To achieve continuous motion at a constant velocity for the self-propelled device **500**, the displacement of the device's center of mass relative to its center of rotation can be maintained by action of wheels **568**, **570**. The displacement of the center of mass of the self-propelled device **500** relative to a center of rotation can be difficult to measure, and thus it can be difficult to obtain feedback for a closed-loop controller to maintain constant velocity. However, the displacement is proportional to the tilt angle (equal to polar angle θ) between support platform or the structure **515** and the surface on which self-propelled device **500** moves. The tilt angle can be sensed or estimated from a variety of sensor inputs. Therefore, as an example, a speed controller for the self-propelled device **500** can be implemented to use the tilt angle between the support

18

platform or structure **515** and the surface to regulate speed for the wheels **568**, **570** causing the self-propelled device **500** to move at a constant speed. The speed controller can determine the desired tilt angle to produce the desired speed, and the desired angle set-point is provided as an input to a closed loop controller regulating the drive mechanism.

In some implementations, such as illustrated by FIG. **5B**, the self-propelled device **500** can be under operative control by a controller device **502**. The controller device **502** can be any device capable of communicatively linking with the self-propelled device **500** to provide control commands. For example, the controller device **502** can be a multi-functional wireless device, such as a smart phone or tablet computing device. The controller device **502** can execute an application specific to controlling the self-propelled device **500**. In accordance with many examples, the controller device **502** can generate a user interface including virtual controls (e.g., a virtual steering mechanism) to enable a user to operate the self-propelled device. Thus, as shown in FIG. **5B**, as the user inputs a control input **590** commanding the self-propelled device **500** to move forward on the controller device **502**, the self-propelled device **500** moves forward accordingly.

In an example of FIG. **5A** and FIG. **5B**, the internal drive system of the self-propelled device **500** can generate momentum to pitch or tilt the platform based on the direction of acceleration, which can coincide with forward, reverse, or lateral acceleration. The magnetic interaction between external accessory **504** and the self-propelled device **500** can cause the external accessory **504** to roll or pitch along with the internal components as the self-propelled device **500** accelerates and drives forward. In order to prevent the external accessory **504** from spinning, the external accessory **504** can have complementary magnetic elements oriented with opposing polarity to the magnetic elements of the self-propelled device **500**. In the examples shown in FIGS. **5A-5B**, the self-propelled device **500** includes a pair of magnetic elements, where a first magnetic element may be oriented such that its south magnetic pole faces upwards, and a second magnetic element may be oriented such that its north magnetic pole faces upwards. Thus, the external accessory **504** can include a complementary pair of magnets with a first magnetic element being oriented with its south magnetic pole facing downwards to magnetically attract the first magnetic element of the self-propelled device **500**. A second magnetic element of the external accessory **504** can be oriented with its north magnetic pole facing downward to magnetically attract the second magnetic element of the self-propelled device **500**. Various magnetic element arrangements are contemplated in which any number of magnetic elements (e.g., a magnetic array) can be included in the self-propelled device **500**. For such arrangement, example external accessory devices **504** can include a complementary set or magnetic array with partnered magnets oriented in opposition to their associated magnets within the self-propelled device **500**.

FIG. **6** illustrates an example of a spherical self-propelled device **600**, and shows a schematic illustrating the components of the example spherical self-propelled device **600**. However, variations of the present disclosure are not limited to such devices. Rather, the above-discussed system **100** of FIG. **1** can be implemented with respect to any remote device in which pairings or connections are made. Referring to FIG. **6**, the self-propelled device **600** can be of a size and weight allowing it to be easily grasped, lifted, and carried in an adult human hand. The self-propelled device **600** can include a spherical housing **602** with an outer surface that makes contact with an external surface of a corresponding magnetically coupled accessory device as the self-propelled device **600**

19

rolls. In addition, the spherical housing **602** includes an inner surface **604**. Additionally, the self-propelled device **600** includes several mechanical and electronic components enclosed by the spherical housing **602**. In an example, self-propelled device **600** includes magnetic elements **682** which are supported within spherical housing **602** and which magnetically interact with complementary magnetic elements of a suitable accessory device. The magnetic interaction and coupling can occur and/or be maintained while the self-propelled device **600** moves.

The spherical housing **602** can be composed of a material that transmits signals used for wireless communication, yet is impervious to moisture and dirt. The spherical housing **602** can comprise a material that is durable, washable, and/or shatter-resistant. The spherical housing **602** may also be structured to enable transmission of light and can be textured to diffuse the light.

In one variation, the housing **602** is made of sealed polycarbonate plastic. In one example, the spherical housing **602** comprises two hemispherical shells with an associated attachment mechanism, such that the spherical housing **602** can be opened to allow access to the internal electronic and mechanical components.

Several electronic and mechanical components are located inside the envelope for enabling processing, wireless communication, propulsion and other functions (collectively referred to as the “interior mechanism”). In an example, the components include a drive system **601** to enable the device to propel itself. The drive system **601** can be coupled to processing resources and other control mechanisms, as described with other examples. The carrier **614** serves as the attachment point and support for components of the drive system **601**. The components of the drive system **601** are not rigidly attached to the spherical housing **602**. Instead, the drive system **601** can include a pair of wheels **618**, **620** that are in frictional contact with the inner surface **604** of the spherical housing **602**.

The carrier **614** is in mechanical and electrical contact with an energy storage **616**. The energy storage **616** provides a reservoir of energy to power the device **600** and electronics and can be replenished through an inductive charge port **626**. The energy storage **616**, in one example, is a rechargeable battery. In one variation, the battery is composed of lithium-polymer cells. In other variations, other rechargeable battery chemistries are used.

The carrier **614** can provide the mounting location for most of the internal components, including printed circuit boards for electronic assemblies, sensor arrays, antennas, and connectors, as well as providing a mechanical attachment point for internal components.

The drive system **601** can include motors **622**, **624** and wheels **618**, **620**. The motors **622** and **624** connect to the wheels **618** and **620**, respectively, each through an associated shaft, axle, and gear drive (not shown). The perimeter of wheels **618** and **620** are two locations where the interior mechanism is in mechanical contact with the inner surface **604**. The locations where the wheels **618** and **620** contact the inner surface **604** are an essential part of the drive mechanism of the self-propelled device **600**, and so are preferably coated or covered with a material to increase friction and reduce slippage. For example, the wheels **618** and **620** can be covered with silicone rubber tires.

In some variations, a biasing assembly **615** is provided to actively force the wheels **618**, **620** against the inner surface **604**. In an example illustrated by FIG. 6, the biasing assembly **615** can comprise two or more separate portal axles **658**, **660** to actively force the drive system wheels **618**, **620** against the

20

inner surface **604**. The portal axles **658**, **660** may include biasing elements **654**, **656** (or springs) which include tips **655** or ends that press against the inner surface **604** with a force vector having a vertical value. The vertical force from the bias springs **654**, **656** pressing against the inner surface **604** actively forces the drive system **601** and its respective wheels **618**, **620** against the inner surface **604**, thereby providing sufficient force for the drive system **601** to cause the self-propelled device **600** to move.

The portal axles **658**, **660** comprising the independent biasing elements **654**, **656** can be mounted directly onto the carrier **614**. The biasing elements **654**, **656** coupled to the portal axles **658**, **660** may be in the form of torsion springs which instigate a force against the inner surface **604**. As an addition or alternative, the biasing elements **654**, **656** may be comprised of one or more of a compression spring, a clock spring, or a tension spring. Alternatively, the portal axles **658**, **660** can be mounted, without inclusion of springs, to maintain a force pressing the drive system **601** and wheels **618**, **620** against the inner surface **604**, and allow sufficient traction to cause the self-propelled device **600** to move.

According to many examples, the self-propelled device **600** can include an inductive charge port **626** to enable inductive charging of a power source **616** used to provide power to the independent motors **622**, **624** that power the wheels **618**, **620**. The self-propelled device **600** can further include a magnet holder **680** coupled to the carrier **614**. The magnet holder **680** can include a set of magnetically interactive elements **682**, such as elements comprised of ferrous materials, and/or electromagnets or permanent magnets. Likewise, an external accessory can also include complementary magnets for enabling the magnetic coupling. Thus, the magnet holder **680** and the external accessory can comprise one or more of any combination of magnetically interactive metals, ferromagnetic elements, neodymium, yttrium/cobalt, alnico, or other permanent elemental magnets, other “rare-earth” magnets, electromagnets, etc.

In variations, the magnet holder **680** can include a set of magnetic elements **682** (e.g., a magnet pair) which can be oriented to have opposing polarity. For example, as shown with other examples, the magnetic elements **682** include a first magnet and a second magnet, where the first magnet can be oriented such that its north magnetic pole faces upwards and its south magnetic pole faces downwards. The second magnet can be oriented such that its south magnetic pole faces upwards and its north magnetic pole face downwards.

In variations, the magnet holder **680** and an external accessory can each house any number or combination of complementary magnets or magnetic components. For example, a single magnetic component may be housed in either the self-propelled device **600** or in a corresponding external accessory, and be arranged to magnetically interact with a plurality of magnetic components of the other of the external accessory or the self-propelled device **600**. Alternatively, for larger variations, magnetic arrays of three or more magnets may be housed within the spherical housing **602** to magnetically interact with a corresponding magnetic array of the external accessory.

In some examples, the biasing assembly **615** is formed such that the wheels **618**, **620** and the tip ends **655** of the biasing elements **654**, **656** are almost constantly engaged with the inner surface **604** of the spherical housing **602**. As such, much of the power from the motors **622**, **624** is transferred directly to rotating the spherical housing **602**, as opposed to causing the internal components (i.e., the biasing assembly **615** and internal drive system **601**) to pitch. Thus, while motion of the self-propelled device **600** may be caused, at

21

least partially, by pitching the internal components (and therefore the center of mass), motion may also be directly caused by active force of the wheels **618**, **620** against the inner surface **604** of the spherical housing **602** (via the biasing assembly **615**) and direct transfer of electrical power from the motors **622**, **624** to the wheels **618**, **620**. As such, the pitch of the biasing assembly **615** may be substantially reduced, and remain substantially constant (e.g., substantially perpendicular to the external surface on which the self-propelled device **600** moves). Additionally or as an alternative, the pitch of the biasing assembly **615** may increase (e.g., to over 45 degrees) during periods of hard acceleration or deceleration. Furthermore, under normal operating conditions, the pitch of the biasing assembly **615** can remain stable or subtly vary (e.g., within 10-15 degrees).

In some variations, the magnetic elements **682** can be replaced or augmented with magnetic material, which can be included on, for example, the tip ends **655** of the biasing elements **654**, **656**. The tip ends **655** can be formed of a magnetic material, such as a ferrous metal. Such metals can include iron, nickel, cobalt, gadolinium, neodymium, samarium, or metal alloys containing proportions of these metals. Alternatively, the tip ends **655** can include a substantially frictionless contact portion, in contact with the inner surface **604** of the spherical housing **602**, and a magnetically interactive portion, comprised of the above-referenced metals or metal alloys, in contact or non-contact with the inner surface **604**. As another variation, the substantially frictionless contact portion can be comprised of an organic polymer such as a thermoplastic or thermosetting polymer.

In some examples, the tip ends **655** can be formed of magnets, such as polished neodymium permanent magnets. In such variations, the tip ends **655** can produce a magnetic field extending beyond the outer surface of the spherical housing **602** to magnetically couple with the external accessory device. Alternatively still, the tip ends **655** can include a substantially frictionless contact portion, and have a magnet included therein.

Alternatively still, a magnetic component of the self-propelled device **600** may be included on any internal component, such as the carrier **614**, or an additional component coupled to the biasing assembly **615** or the carrier **614**.

In further examples, one or more of the magnetic elements **682**, the tip ends **655**, and/or the complementary magnets of the external accessory device can comprise any number of electro- or permanent magnets. Such magnets may be irregular in shape to provide added magnetic stability upon motion of the self-propelled device **600**. For example, the magnetic elements **682** of the self-propelled device **600** can be a single or multiple magnetic strips including one or more tributary strips to couple with the complementary magnet(s) of the accessory device. Additionally, or alternatively, the tip ends **655** can also include a single or multiple magnets of different shapes which couple to complementary magnets of the accessory device.

Alternatively, the magnetic coupling between the self-propelled device **600** and the accessory device can be one which creates a stable magnetically repulsive state. For example, the magnetic elements **682** can include a superconductor material to substantially eliminate dynamic instability of a repelling magnetic force in order to allow for stable magnetic levitation of the accessory device in relation to the magnetic elements **682** while the spherical housing **602** rotates on the underlying surface. In similar variations, a diamagnetic material may be included in one or more of the self-propelled device **600**, the tip ends **655**, or the external accessory device, to provide stability for magnetic levitation. Thus, without the use of

22

guiderails or a magnetic track, the self-propelled device **600** may be caused to maneuver in any direction with the external accessory device remaining in a substantially constant position along a vertical axis of the self-propelled device **600** (Cartesian or cylindrical z-axis, or spherical r-coordinate with no polar angle (θ)).

FIG. 7A is a cross-sectional side view of an example self-propelled device including an independent internal structure and a structure for magnetic coupling to an external accessory device. In the below description of FIG. 7A, the self-propelled device **700** may incorporate numerous features of other examples provided herein. Referring to FIG. 7A, the self-propelled device **700** can include an internal drive system **702** to cause the self-propelled device **700** to move in any one of multiple possible directions. The internal drive system **702** can be biased, by one or more biasing elements, in order to cause a number of wheels **714** to continuously engage the inner surface **716** of the spherical housing **718**. Thus, as the self-propelled device **700** is remotely operated by a controller device, the internal drive system **702** causes the spherical housing **718** to roll and maneuver in accordance with received control commands.

According to examples described herein, the self-propelled device **700** can include an external accessory, where magnetic elements **712** of the self-propelled device **700** can magnetically interact through the spherical housing **718** with corresponding magnetic elements or material of the external accessory. Accordingly, as the spherical housing **718** rolls, the magnetic interaction between the magnetic elements **712** and the corresponding magnetic elements or material of the external accessory causes the magnet holder **706**, upon which the magnetic elements of the self-propelled device **700** are housed, to maintain a positional relationship with the external accessory. Thus, the spherical housing **718** may roll and maneuver based on received control commands, and the magnetic elements **712** may maintain continuous interaction with the magnetic elements or material of the external accessory device.

In some examples, the magnet holder **706** can be directly coupled to the internal drive system **702**, or a carrier on which components such as a circuit board are integrated. Alternatively, the magnet holder **706** can be coupled to an independent internal structure **707** that is coupled to the internal drive system via a tilt spring **708**. As shown in FIG. 7A, the tilt spring **708** can allow for an amount of shock absorption when the self-propelled device **700** experiences a collision event. The tilt spring **708** can further dampen an impact force experienced by the independent internal structure **707**, in order to lessen jolts, jerk events, and/or jounces experienced by the self-propelled device **700**. Such events may increase the probability that the magnetic elements will decouple, causing the external accessory coupled to the self-propelled device **700** to detach. The tilt spring **708** can decrease the probability of such decoupling events.

FIG. 7B is a cross-sectional front view of an example self-propelled device including a biasing assembly and a structure for magnetic coupling to an accessory device. The self-propelled device **720** may be a variant of the self-propelled device **700** as described with respect to FIG. 7A. As an example, the independent internal structure **707** of FIG. 7A may be included as part of a biasing assembly **758** as shown in FIG. 7B. Furthermore, while not shown in FIG. 7B, the self-propelled device **720** may also include a tilt spring **708** as provided in FIG. 7A. Referring to FIG. 7B, the internal drive system **760** of the self-propelled device **720** can be biased by the biasing assembly **758**. The biasing assembly **758** can include a number of biasing elements **754**, **756**, which can

include springs, or other devices storing mechanical energy, in order to produce a continuous force on the inner surface of the spherical housing 757. The force provided by the biasing elements 754, 756 can cause the internal drive system 760 to exert a continuous force (F_1) on the inner surface of the spherical housing 757 so that when power is provided to wheels within device 720, the turning wheels cause the self-propelled device 720 to roll and maneuver.

Any number of biasing elements 754, 756 may be included within the spherical housing 757. Such biasing elements 754, 756 may be included on the biasing assembly 758, and also as part of the internal drive system 760 to provide stability and decrease the pitch and/or roll of the internal components of the self-propelled device 720 during operation. A reduction in the tilting of the internal components of self-propelled device 720 can cause the external accessory to maintain contact with the spherical housing 757 within a tighter positional area on a top portion of the self-propelled device 720 as the self-propelled device 720 moves.

According to examples, the biasing assembly 758 can include a pivoting magnet holder 750, which can pivot a number of degrees (e.g., 10-20), or which can be set on a guide system to pivot a full 360 degrees. The pivoting magnet holder 750 can include a pair of magnets 762 oriented with opposing polarity to each other. Complementary magnets of a corresponding external accessory can also be oriented with opposing polarity to each other, such that the external accessory can only be attached to the self-propelled device 720 and the opposing magnets on the external accessory couple to the opposing magnets 762 on the pivoting magnet holder 750. Accordingly, as the pivoting magnet holder 750 pivots, the external accessory pivots accordingly.

The biasing assembly 758 can further include a pivot actuator 752 which, based on a control command received from a controller device, can cause the pivoting magnet holder 750 to turn. In an example where the device of FIG. 7B is implemented with the system 100 of FIG. 1, a pivot command can be received via a transducer 102 and processed by a processor 114 (as shown in FIG. 1) in order to implement the command on the pivot actuator 752. Thus, a control feature on the controller device, such as a user interface feature on a virtual steering mechanism, can be used to receive user input which causes the pivoting magnet holder 750 to turn, and thereby causes the external accessory to turn. The pivot actuator 752 can be controlled to turn clockwise or counterclockwise dynamically in response to such pivot commands.

Additionally or alternatively, the self-propelled device 720 may be preprogrammed to cause the pivot actuator 752 to activate in response to certain events. For example, upon starting up, the self-propelled device 720 may be preprogrammed to detect a direction towards the controller device. Based on the direction of the controller, the internal drive system 760 can rotate the self-propelled device 720 in order to calibrate a forward direction for the self-propelled device 720 in relation to the controller device. In addition, the pivot actuator 752 may be automatically enabled to turn the pivoting magnet holder 750 such that the external accessory faces the controller device.

Additionally or alternatively, the pivoting magnet holder 750 may have a default forward direction that coincides with a calibrated forward direction of the internal drive system 760. Thus, as the self-propelled device 720 is initially calibrated to the controls of the controller device, the pivot actuator 752 may be enabled to automatically calibrate a forward facing direction for the external accessory. Furthermore, the pivot actuator 752 may be automatically initiated during collision events or when another self-propelled device is

detected within a predetermined distance. Further still, combinations of actions may be performed by the internal drive system 760 and the pivot actuator 752 as programmed actions or events.

According to examples, the external accessory can also include features to dampen shock events, such as when the self-propelled device 720 goes over bumps or experiences collisions. The external accessory can thus include a contact portion to maintain contact with the outer surface of the spherical housing 757, and a housing structure to support any number of functional or non-functional features. Accordingly, the internal drive system 760, the pivot actuator 752, functional or non-functional components of the external accessory (e.g., one or more speakers) can be combined to enable the self-propelled device 720 to exhibit different kinds of actions.

A contact portion of the external accessory can be coupled to the housing structure by one or more shock springs to reduce the effect of impacts on the magnetic coupling. In an aspect of FIG. 7A, as the self-propelled device 720 goes over bumps or experiences collision events, the tilt spring 708 as well as a shock spring of the external accessory can dampen such events to decrease the likelihood of the external accessory decoupling with the self-propelled device 720.

FIG. 8 is a cross-sectional view of an example self-propelled device including a magnetic array. The self-propelled device 800 and a corresponding external accessory can include various elements discussed above with respect to FIGS. 1, 2A-2C, 3A-3C, 4A-4B, 5A-5B, 6, and 7A-7B. According to many examples described herein, the self-propelled device 800 can include an internal drive system 810 coupled to a biasing assembly 820. The biasing assembly 820 can include a number of biasing elements 816, 818, a pivoting magnet holder 822, and one or more pivot actuators 826 to cause the pivoting magnet holder 822 (and thus the external accessory) to turn. The biasing assembly 820 can be coupled to the internal drive system 810 via a tilt spring 814 that allows the pivoting magnet holder 822 to absorb impacts without decoupling the self-propelled device 800 from the external accessory.

According to some examples, the pivoting magnet holder 822 can hold a magnetic array 824 composed of an array of magnetic elements. Such magnetic elements may be an array of neodymium or other permanent magnets. Alternatively, the magnetic array 824 can be composed of one or more electromagnetics to generate a relatively powerful magnetic field. In some implementations, the external accessory may include a corresponding non-magnetized ferrous metal to magnetically interact with the magnetic array 824 of the self-propelled device 800. Alternatively, the external accessory can include its own complementary set of magnetic elements, or a complementary magnet array, to interact with the magnetic array 824 of the self-propelled device 800. The external accessory can include a housing structure that maintains the complementary set of magnetic elements for coupling to the spherical housing.

FIGS. 9A-9B illustrate example turn states of the self-propelled device under operative control by a controller device. The self-propelled device 900 is depicted from a front view as shown in FIGS. 9A-9B. A user input on the controller device 902 to execute a turn is shown. For example, the user may provide an input to turn the self-propelled device 900 right, as shown in FIG. 9A. The self-propelled device 900 can receive the input, and implement the turn command on the internal drive system, which can cause the internal components to pitch and roll accordingly. As the internal components pitch and roll to execute the turn, the external accessory

25

904 can also roll correspondingly, maintaining the magnetic interaction with the internal magnets of the self-propelled device 900. FIG. 9B depicts a user input on the controller device to turn the self-propelled device 900 left, where the internal components, along with the external accessory pitch and roll accordingly.

Hardware Diagram

FIG. 10 is an example block diagram that illustrates a computer system upon which examples described may be implemented. For example, one or more components discussed with respect to the system 100 of FIG. 1 may be performed by the system 1000 of FIG. 10. Still further, the computer system 1000 can be implemented on or as part of a self-propelled device, such as shown by examples of FIGS. 2A-2C, FIGS. 3A-3B, FIGS. 4A-4C, FIGS. 5A-5B, FIG. 6, FIGS. 7A-7B, FIG. 8, and FIGS. 9A-9B.

In one implementation, the computer system 1000 includes processing resources 1010, a main memory 1020, ROM 1030, a storage device 1040, and a communication interface 1050. The computer system 1000 includes at least one processor 1010 for processing information and a main memory 1020, such as a random access memory (RAM) or other dynamic storage device, for storing information and instructions 1022 to be executed by the processor 1010. The instructions 1022 can, for example, enable interpretation of input from a controller device 1002 into command input. The main memory 1020 also may be used for storing temporary variables or other intermediate information during execution of instructions to be executed by the processor 1010. The computer system 1000 may also include a read only memory (ROM) 1030 or other static storage device for storing static information and instructions for the processor 1010. A storage device 1040, such as a magnetic disk or optical disk, is provided for storing information and instructions. For example, the storage device 1040 can correspond to a computer-readable medium that triggers logic for maneuvering the self-propelled device discussed with respect to FIGS. 1-2.

The communication interface 1050 can enable computer system 1000 to communicate with a controller device 1002 via an established network link 1052 (wireless or wireline). Using the network link 1052, the computer system 1000 can receive command instructions for maneuvering the self-propelled device.

Examples described herein are related to the use of computer system 1000 for implementing the techniques described herein. According to one example as illustrated in FIG. 10, those techniques are performed by computer system 1000 in response to processor 1010 executing one or more sequences of one or more instructions contained in main memory 1020. Such instructions may be read into main memory 1020 from another machine-readable medium, such as storage device 1040. Execution of the sequences of instructions contained in the main memory 1020 causes processor 1010 to perform the process steps described herein. In alternative implementations, hard-wired circuitry may be used in place of or in combination with software instructions to implement examples described herein. Thus, the examples described are not limited to any specific combination of hardware circuitry and software.

While certain examples have been described above, it will be understood that the examples described are by way of example only. Accordingly, this disclosure should not be limited based on the described examples. Rather, the scope of the

26

disclosure should only be limited in light of the claims that follow when taken in conjunction with the above description and accompanying drawings.

What is claimed is:

1. A self-propelled device comprising:

a spherical housing;

an internal drive system enclosed within the spherical housing and operable to cause the self-propelled device to roll;

an internal structure enclosed within the spherical housing and coupled to the internal drive system, the internal structure including a magnet holder which holds a first set of magnetically interactive elements, wherein the magnet holder comprises a pivot mechanism that pivots the magnet holder relative to an axis of rotation of the internal drive system;

an external accessory comprising a second set of magnetically interactive elements;

a wireless interface to receive control commands from a controller device; and

a control mechanism to implement the control commands, wherein implementing the control commands (i) causes the internal drive system to accelerate and maneuver the self-propelled device, and (ii) causes the pivot mechanism to pivot the external accessory relative to the spherical housing to coincide with a directional input of a control command;

wherein the first set of magnetically interactive elements and the second set of magnetically interactive elements maintain a magnetic interaction through the spherical housing when the spherical housing rolls and when the pivot mechanism pivots the magnetic holder, the magnetic interaction causing the external accessory to pivot when the magnet holder pivots.

2. The self-propelled device of claim 1, wherein the first set of magnetically interactive elements comprises a first and a second magnet oriented to have opposite polarity, and wherein the second set of magnetically interactive elements comprises a first and a second magnet also oriented to have opposite polarity in order to magnetically couple with the first and the second magnets of the magnet holder respectively.

3. The self-propelled device of claim 1, further comprising: a biasing subassembly coupled to the internal drive system to cause the internal drive system to continuously engage an interior surface of the spherical housing.

4. The self-propelled device of claim 3, wherein the biasing subassembly comprises a plurality of portal axles each including a bias spring to engage the interior surface of the spherical housing at a plurality of contact points.

5. The self-propelled device of claim 3, wherein the biasing subassembly and the magnet holder comprise a single internal assembly within the spherical housing.

6. The self-propelled device of claim 5, wherein the single internal assembly is coupled to the internal drive system by one or more springs.

7. The self-propelled device of claim 6, wherein the one or more springs, coupling the single internal assembly to the internal drive system, comprise a vertical tilt spring to dampen an impact force on the single internal assembly when the self-propelled device experiences a collision event.

8. The self-propelled device of claim 1, wherein the external accessory includes a housing structure and a contact portion, the contact portion to engage an exterior surface of the spherical housing.

9. The self-propelled device of claim 8, wherein the contact portion of the external accessory comprises a slider bearing to engage the exterior surface of the spherical housing.

10. The self-propelled device of claim 9, wherein the slider bearing includes the second set of magnetically interactive elements.
11. The self-propelled device of claim 8, wherein the housing structure includes the second set of magnetically interactive elements.
12. The self-propelled device of claim 8, wherein the external accessory includes one or more springs coupling the housing structure and the contact portion.
13. The self-propelled device of claim 8, wherein the contact portion of the external accessory comprises a pair of wheels coupled by an axle assembly, the pair of wheels to engage the exterior surface of the spherical housing.
14. The self-propelled device of claim 13, wherein the external accessory includes one or more springs coupling the housing structure to the axle assembly of the contact portion.
15. The self-propelled device of claim 1, wherein the first and the second set of magnetically interactive elements each comprises one or more ferromagnetic elements, one or more magnets, or one or more electromagnetic elements.

16. The self-propelled device of claim 1, wherein the internal drive system comprises a first motor to operate a first wheel, and a second motor to operate a second wheel, the first and the second wheels to engage an interior surface of the spherical housing.
17. The self-propelled device of claim 1, wherein the pivot mechanism comprises one or more actuators to enable the magnet holder to pivot within the spherical housing in response to a pivot command received from the controller device.
18. The self-propelled device of claim 17, wherein the control commands include the pivot command, and wherein the pivot command engages the one or more actuators to cause the pivot mechanism to pivot the external accessory relative to the spherical housing.
19. The self-propelled device of claim 1, further comprising:
a power source coupled to the internal drive system; and
an inductive charge port to enable inductive charging of the power source.

* * * * *